

Installation Instruction

WARNING

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.

WARNING

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.

CAUTION

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn. Disconnect power and allow fixture to cool before changing bulb or handling fixture.

NOTICE: Green ground screw provided in proper location. Do not relocate.


NOTICE: Minimum 90°C supply conductors.

NOTICE: Specifications and dimensions subject to change without notice.

NOTICE: Suitable for Dry or Damp location

General Wiring Diagram

Cord/Supply Wiring

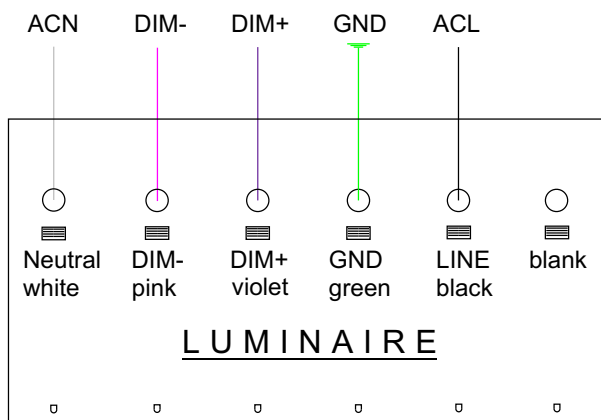

CAUTION

MUST connect wires with corresponding colors.

Installation Instruction

Fixture Power Cord Installation

- 1. Remove wiring Plate A and B.(fig. a)
- 2. Snap Power cord sheath onto plate B. Connect the male plug on the power cord to the female socket inside the fixture.(fig. b)
- 3. Tighten the 2 lock-screws on the male plug with flat-head screwdriver.(fig. c)
- 4. Reattach Plate A & B to fixture body.(fig. d)
- 5. Power cord installation completed.(fig. e)




fig. a




fig. b




fig. c




fig. d





fig.e


Suspension mount kit

Power-Feed Suspension Kit

1




2




3



4




5




Non-Feed Suspension Kit

6




7




8



9



10



Connection
Plate, x1

Hexagon nut, x1
Hexagon head bolts, x2

Power-Feed Suspension Kit Part list:

No.	Part	Qty.
1	Cross-bar with GND wire, screw	1
2	4.3" Power-feed canopy, Grommet	1
3	Treaded sleeve	1
4	Suspension cable, height-adjustable	1
5	Power cord	1

Non-Feed Suspension Kit Part list:


No.	Part	Qty.
6	Cross-bar, Anchor, Screw	1
7	4.3" Non-feed canopy	1
8	Treaded sleeve	1
9	Suspension cable, height-adjustable	1
10	Connection kit*	1

*Required in any type of connection application

Installation Instruction

Suspension mount


Notice: Always turn off the power supply from main circuit breaker before installing or maintaining fixture.

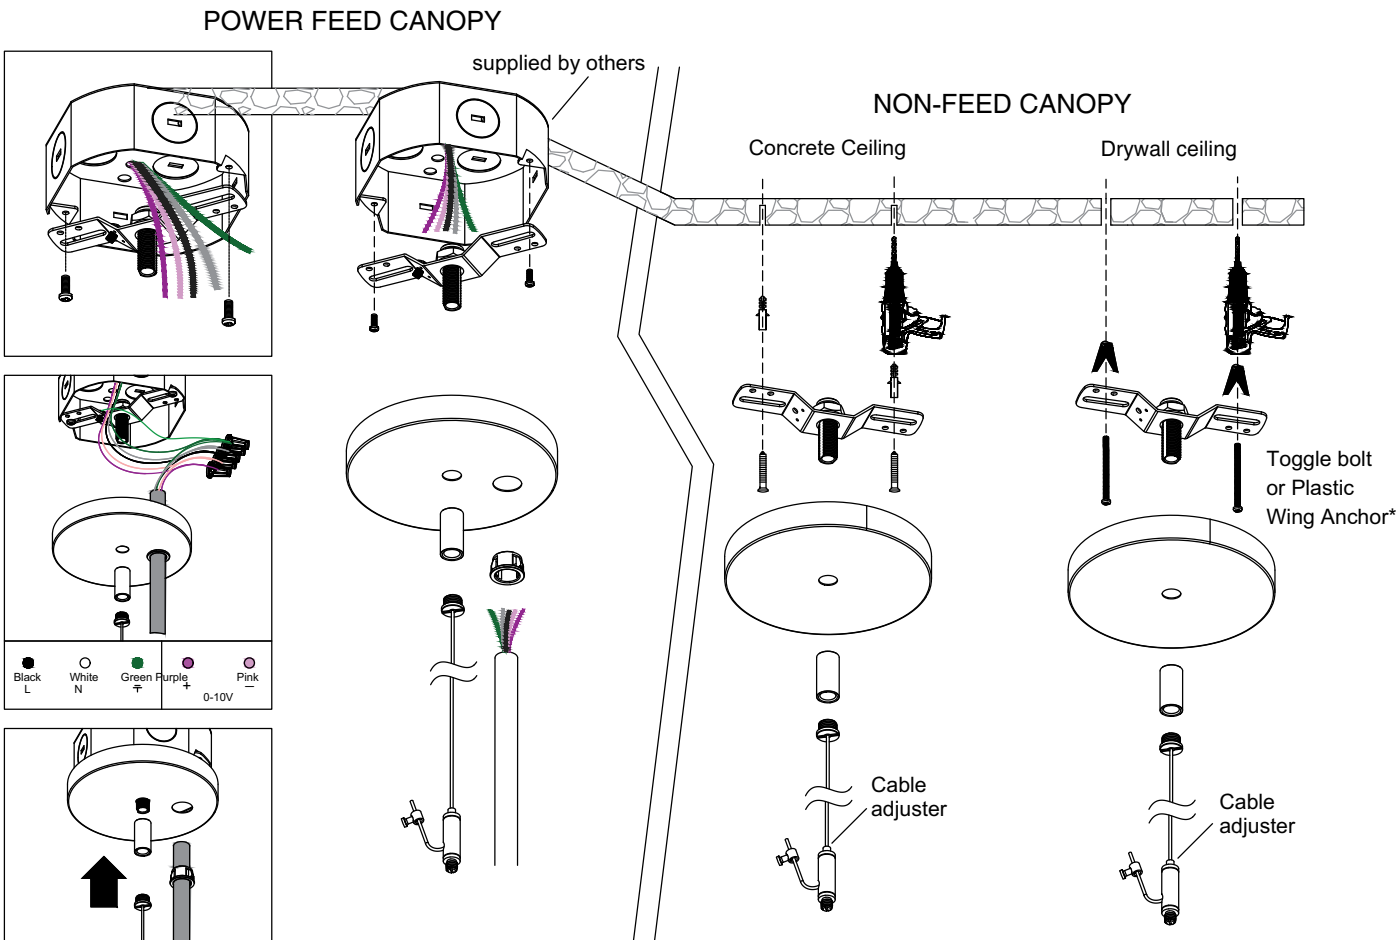


* Supplied by others

How to hang the fixture?

Independent pendant


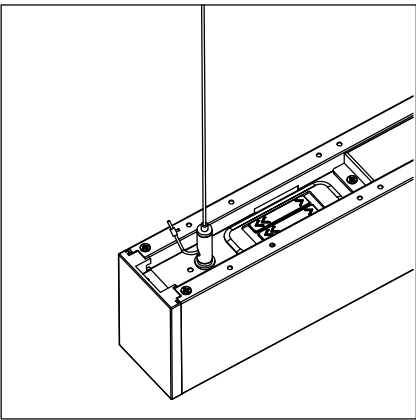


Pendant at connection position

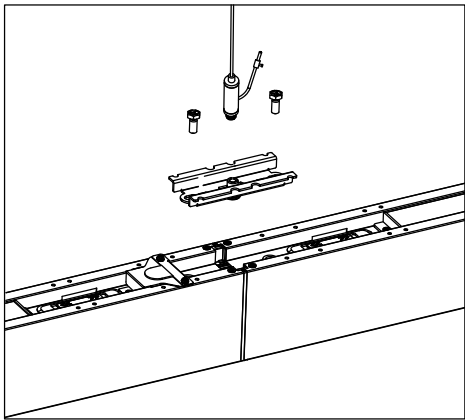

Installation Instruction



Independent installation, pendant mount

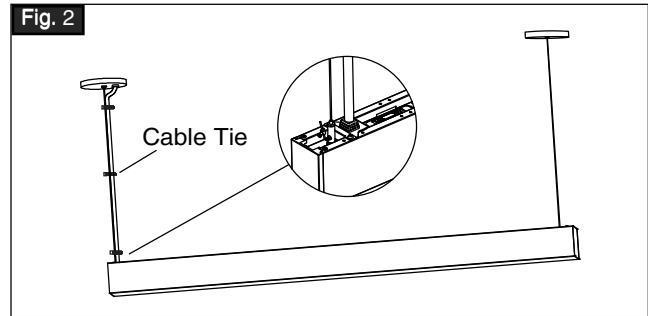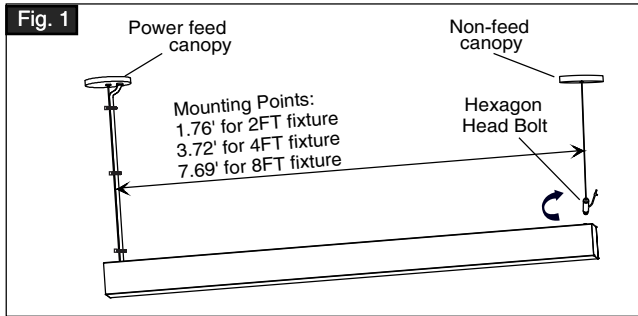


Line Connection

Notice: Always turn off the power supply from main circuit breaker before installing or maintaining fixture.


1. Install cross-bar and Non-feed canopy to the ceiling after positioning refer to the dimensions in Fig 7. (Fig.3)
2. Hang one end of Fixture B firmly. Remove the end-caps and diffusers of the 2 fixtures. (Fig. 4)

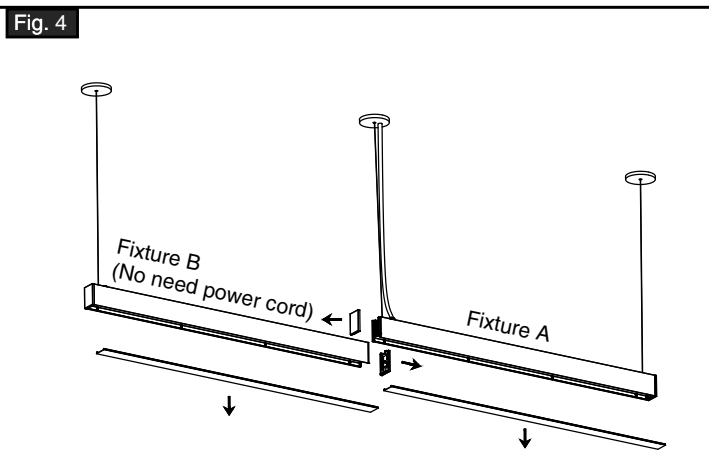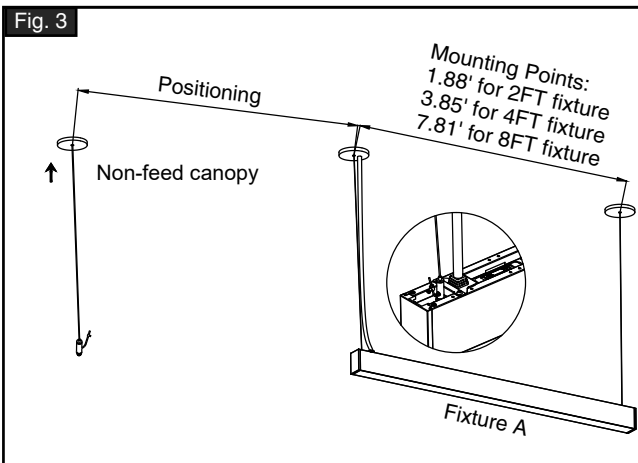

3. Align Fixture B to Fixture A, press to interlock the 2 fixtures in a line. (Fig. 5)
4. Remove the cable bolt hung on the Fixture A. (Fig. 6a & 6b)
5. Install the center hexagon nut to the connection plate. Then, align the connection plate with the positioning holes and secure it with 2 hexagon head bolts. Hang the combination with the cable bolt just removed. (Fig. 6c & 6d)
6. Adjust to desired height. (Fig. 6e)

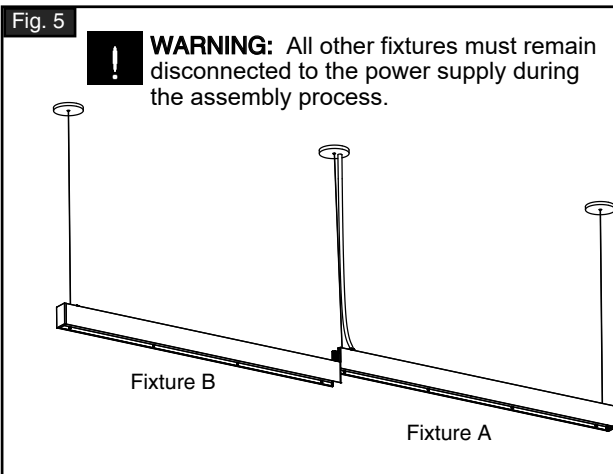


! WARNING: All other fixtures must remain disconnected to the power supply during the assembly process.

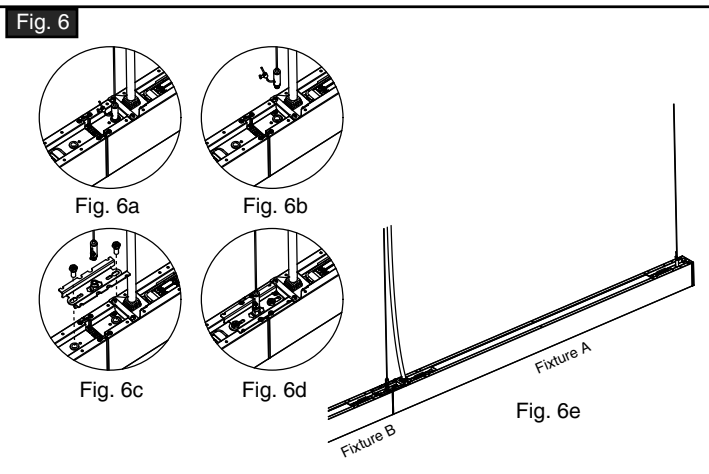


Installation Instruction


7. Repeat above installation steps to make continuous run. Cut the soft lens into a suitable length(refer to Diffuser Length Calculator) , and install it to the channel of the fixture housing.

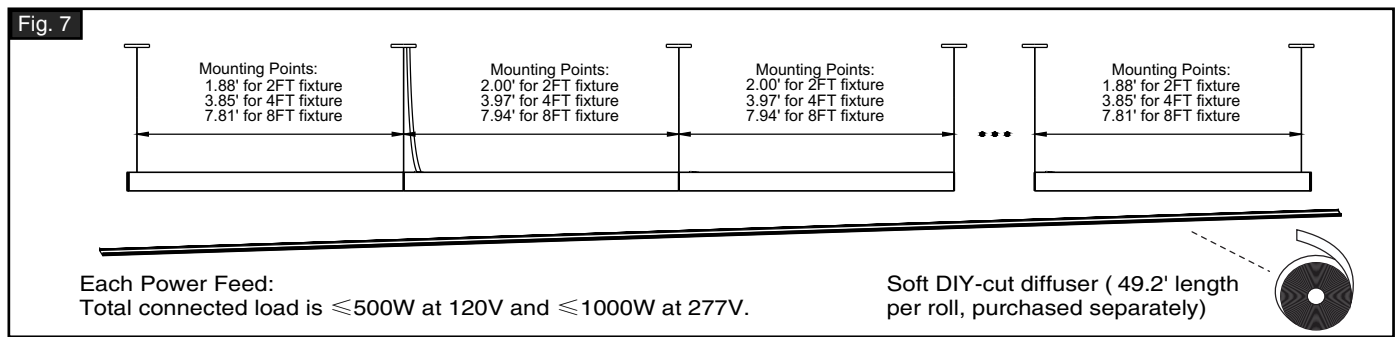

Diffuser Length Calculator for seamless continuous run (Line connection)

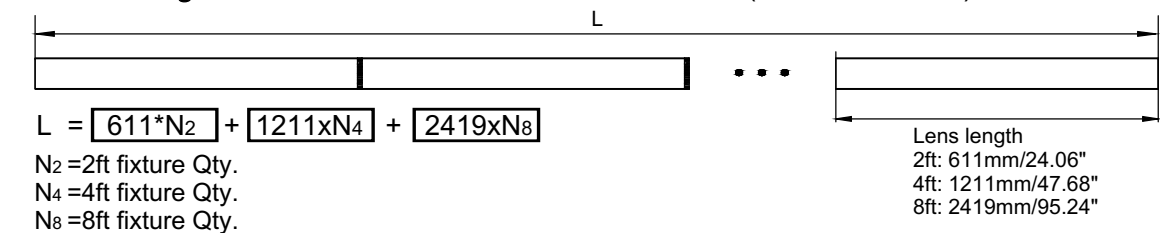


Multiple connection methods

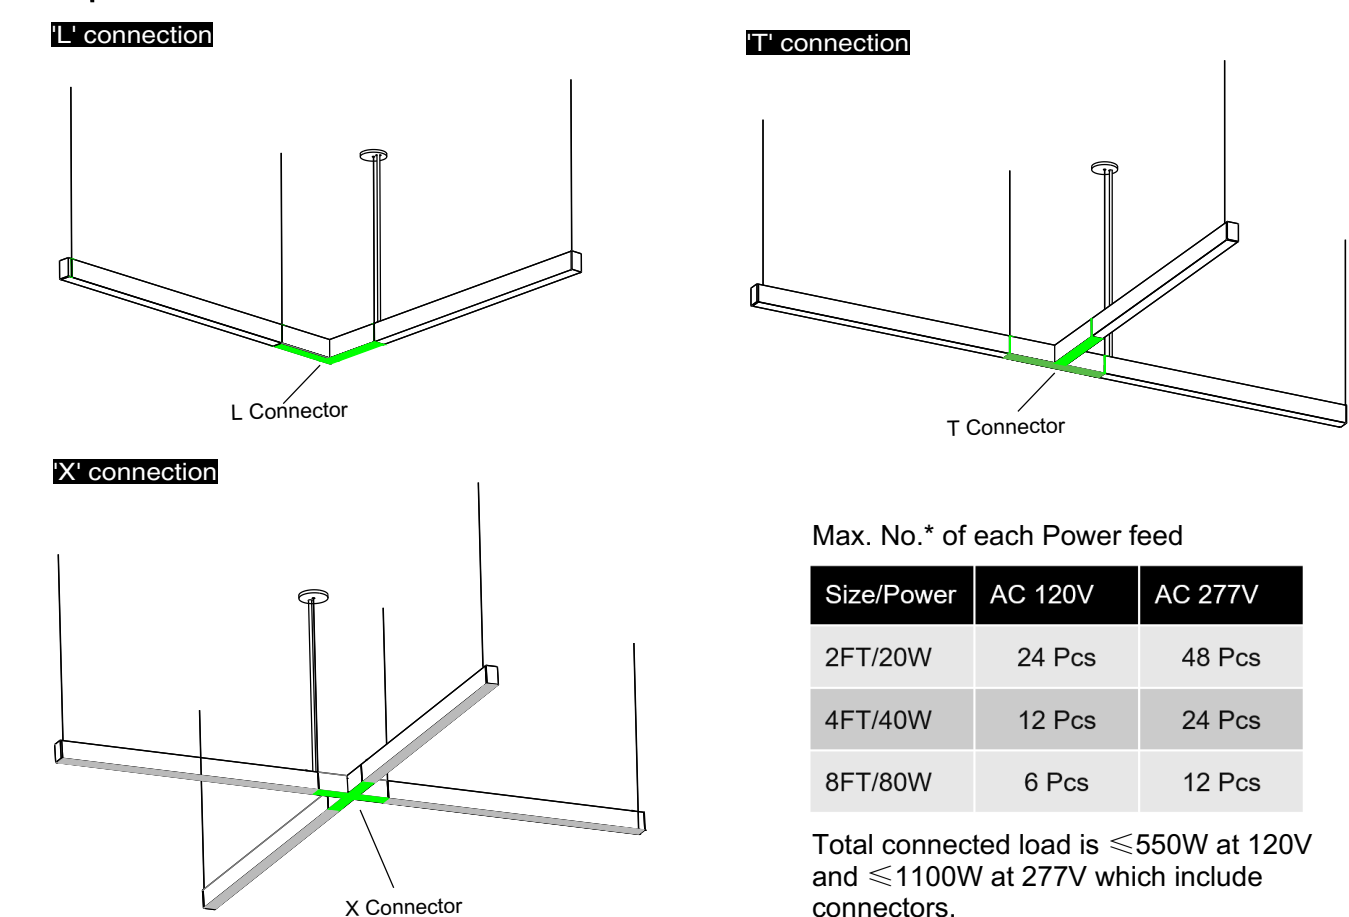

Installation Instruction

L Shape Connection

Notice: Always turn off the power supply from main circuit breaker before installing or maintaining fixture.

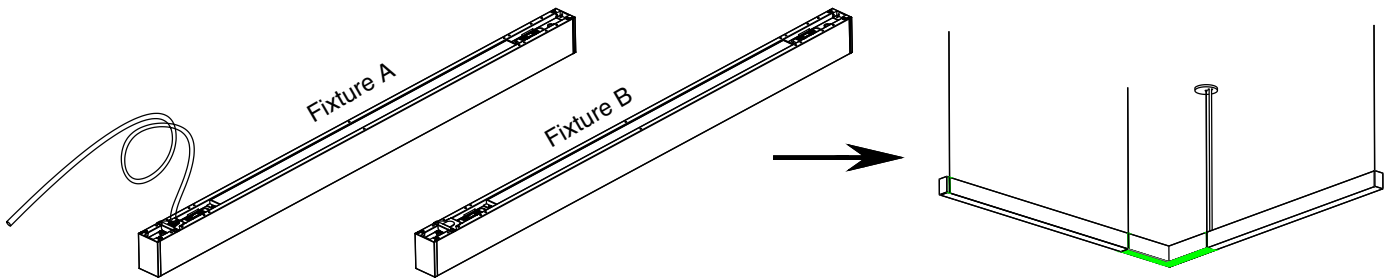

1. Hang fixture A to the ceiling after positioning, remove endcap and diffuser. (Fig. 8)
2. Press and lock the 'L' connector to fixture A after removing the connector lens. Ensure the connector housing align to the fixture housing.(Fig. 9)

Fig. 8


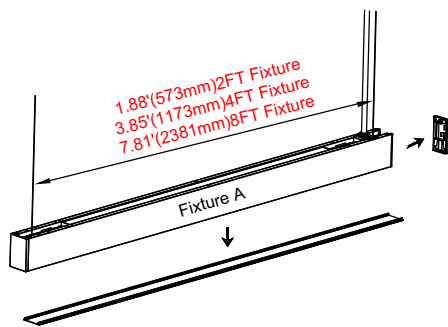


Fig. 9



WARNING: All other fixtures must remain disconnected to the power supply during the assembly process.

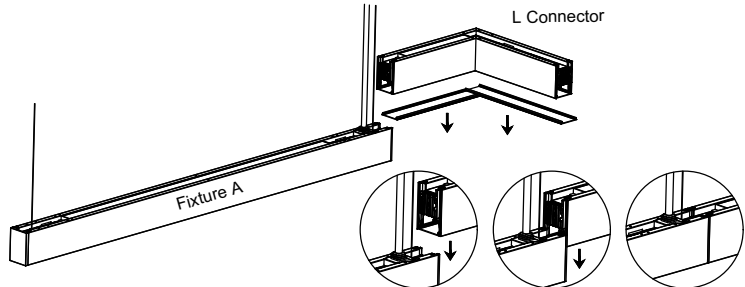

3. Remove the cable bolt hung on the Fixture A (Fig. 10a). Install the center hexagon nut to the connection plate. Then, align the connection plate with the positioning holes and secure it with 2 hexagon head bolts. (Fig. 10b). Hang the combination with the cable bolt just removed and adjust to desired height.(Fig. 10c & 10d)
4. Hang one end of Fixture B firmly to the ceiling after positioning. Remove the end-cap and diffuser of fixture B. Press and lock the fixture B to the 'L' connector. Ensure the fixture B housing align to connector housing (Fig.11).
5. Secure the connection plate to the fixture B and 'L' connector (Fig. 11a). Hang the 'L' combination and adjust to desired height.

Fig. 10

Fig. 10a


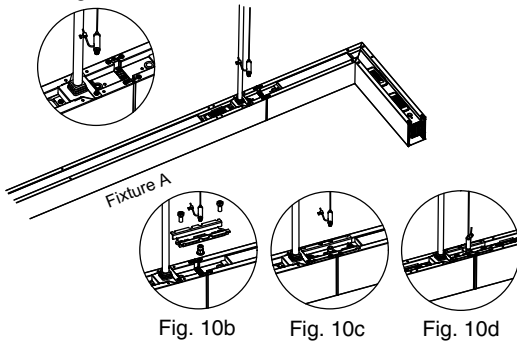


Fig. 11




WARNING: All other fixtures must remain disconnected to the power supply during the assembly process.

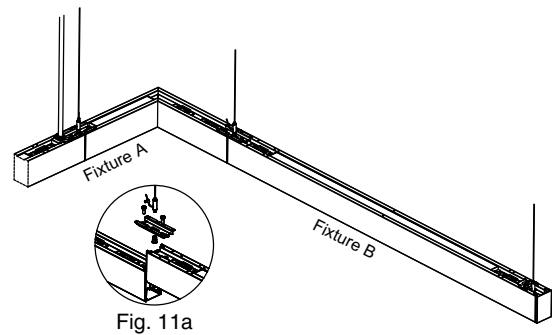


Installation Instruction

6. Install lens to fixtures and 'L' connector.(Fig. 12)

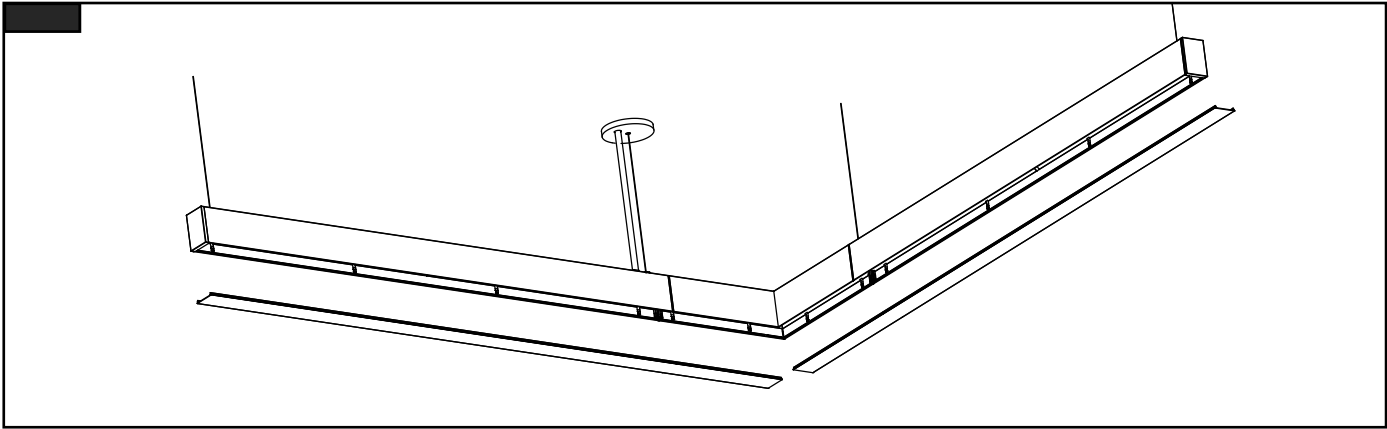


'L' shape continuous run

Fig. 13

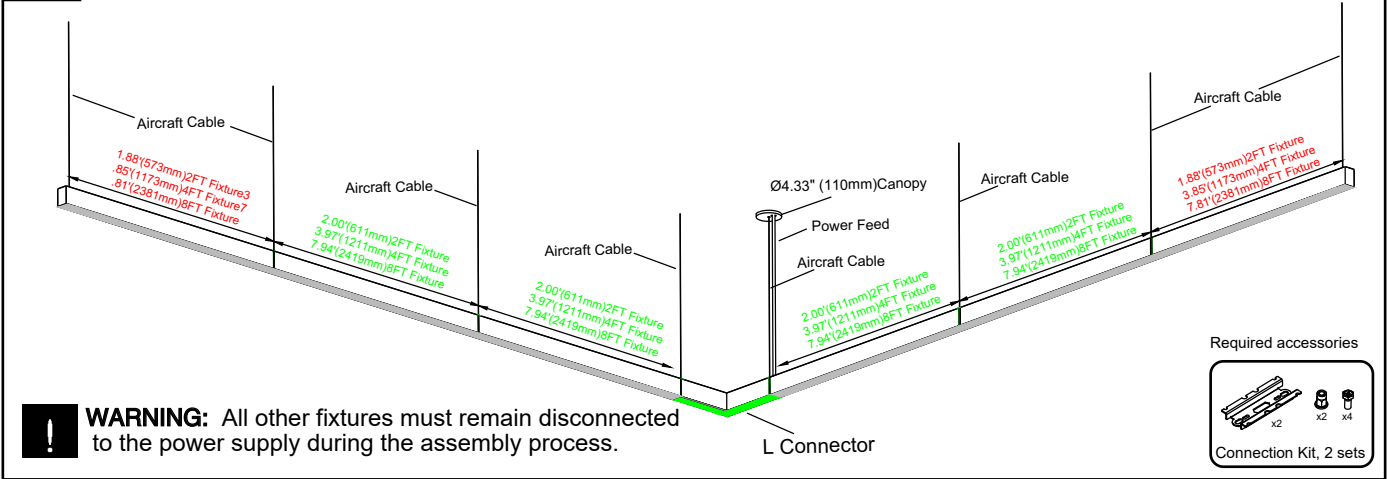

'T' shape continuous run


Fig. 14

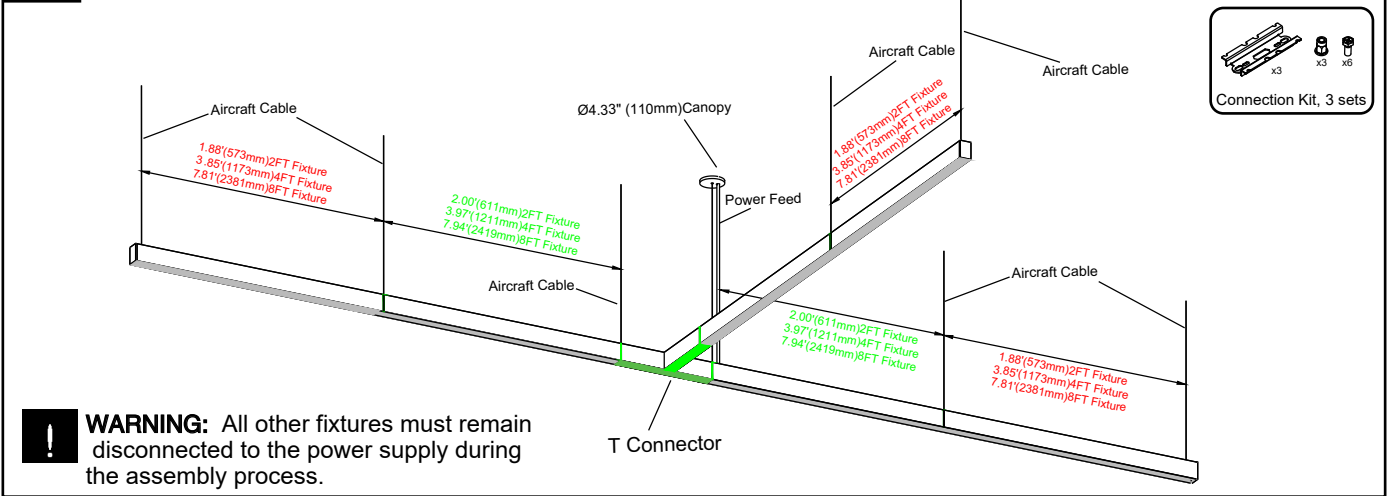


Installation Instruction

'X' shape continuous run

Fig. 15

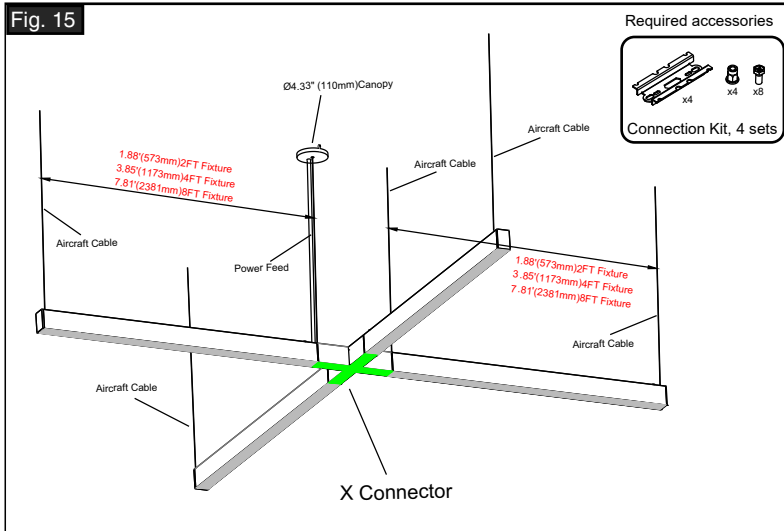

Connector dimensions

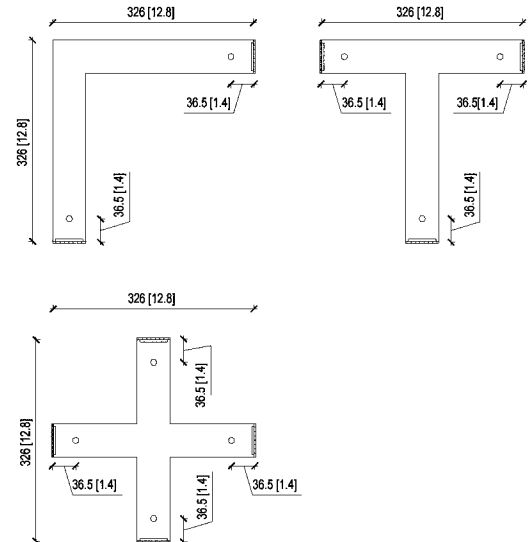


Surface mount

Notice: Always turn off the power supply from main circuit breaker before installing or maintaining fixture.

1. Take out the fixture and accessories from packaging and inspect for any damages. Connect the provided short power cord to the fixture before installation.

Fig. 16

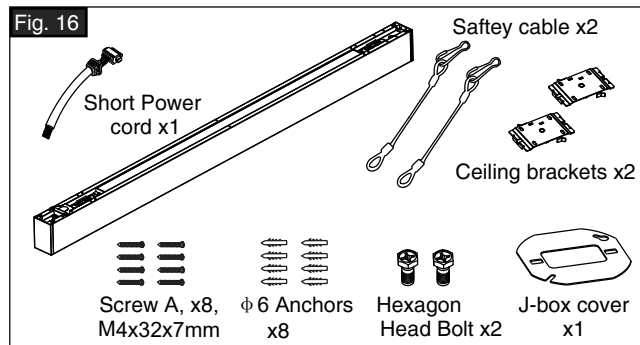

3. Fix the brackets to the ceiling with provided screw A.

Fig. 18



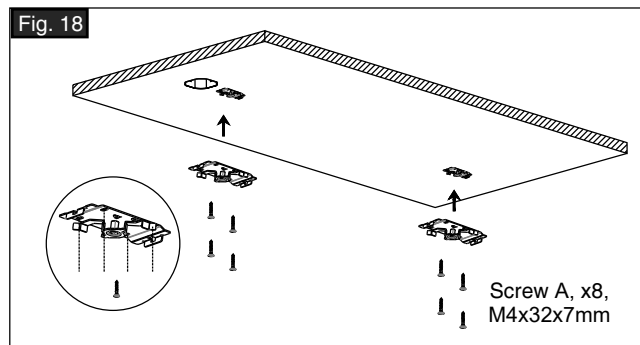


Fig. 17

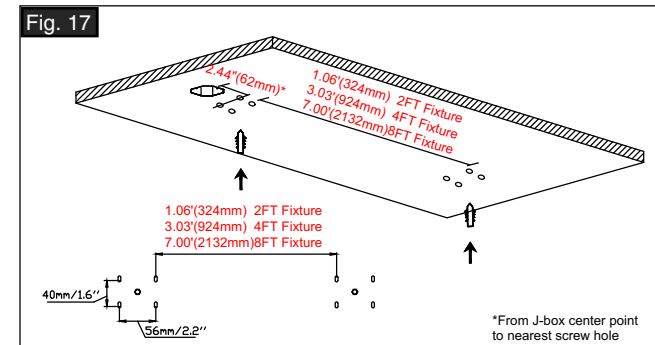

4. Fix safety cable to the fixture back with Hexagon Head Bolt. Hang the safety cables to the brackets. Pass power cord through the provided J-box cover-plate and make wiring to Main power.


Fig. 19

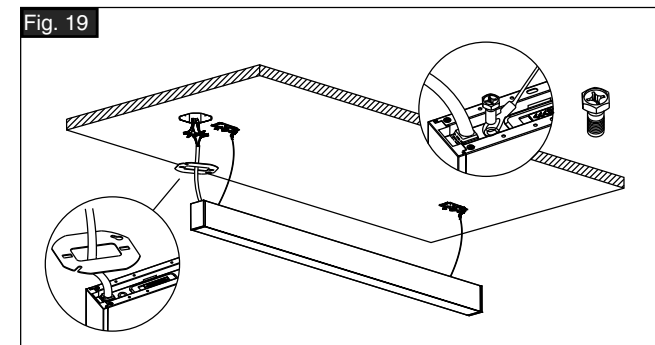

Installation Instruction


5. Attach the fixture to the brackets as shown, toggle and lock the latch on the bracket.

Fig. 20

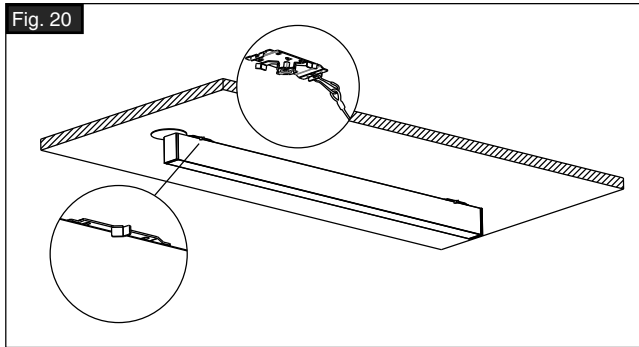

6. Make sure the fixture hung in the ceiling firmly. Clean up fingerprints and stains.

Fig. 21

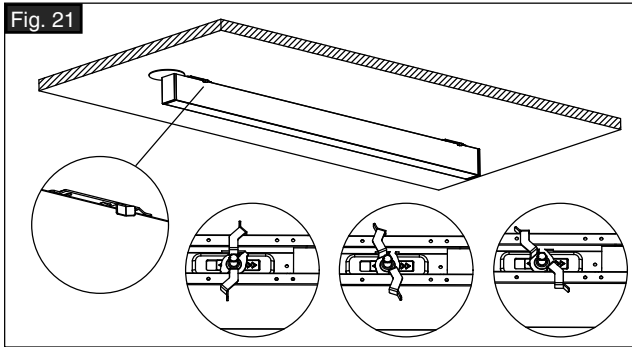

Wall mount

Notice: Always turn off the power supply from main circuit breaker before installing or maintaining fixture.

1. Take out the fixture and accessories from packaging and inspect for any damages. Connect the provided short power cord to the fixture before installation.

Fig. 22



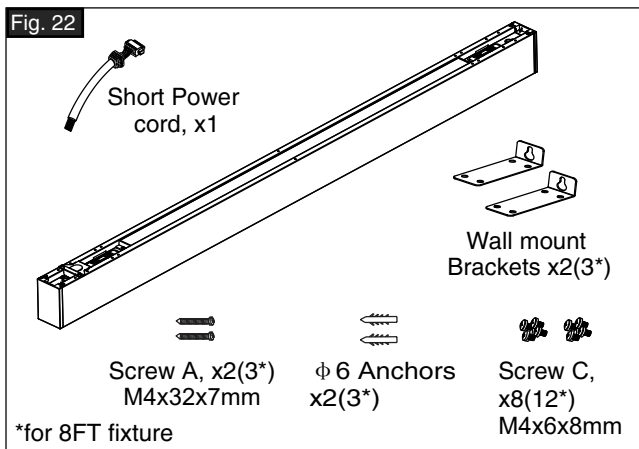


Fig. 23

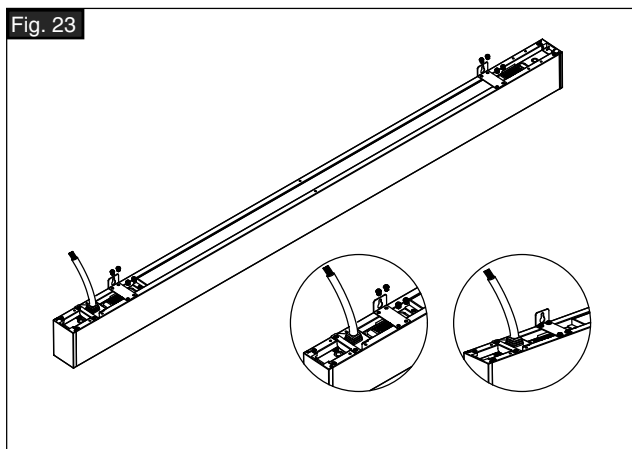


3. Position using the junction box as reference point, drill 2 holes in the wall as shown, then install anchors and hang fixture with provided screw A.

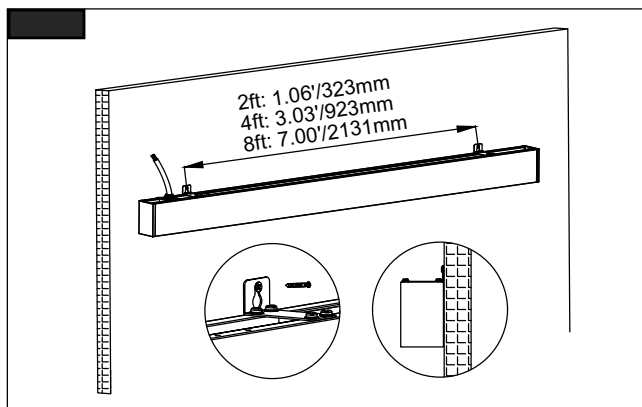

4. Do wiring connection to Main Power as required by code and local regulations. Place all wires and connectors into the junction box. Cover the junction box and clean up fingerprints and stains.


Fig. 25

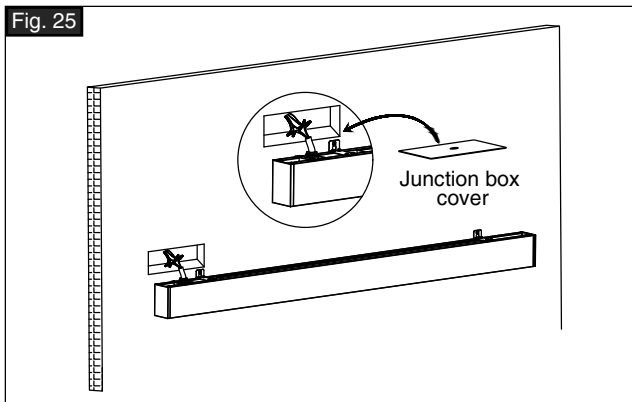


Installation Instruction

Grid Suspension Mount

POWER FEED

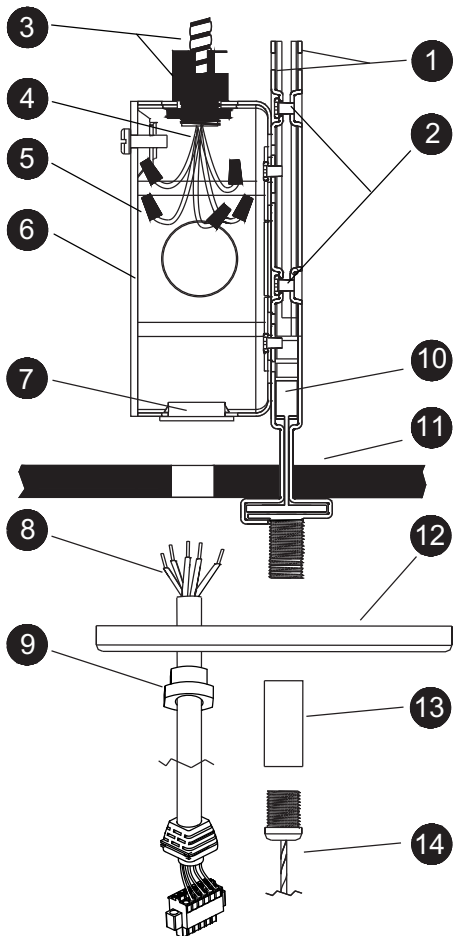









NON-FEED SUSPENSION

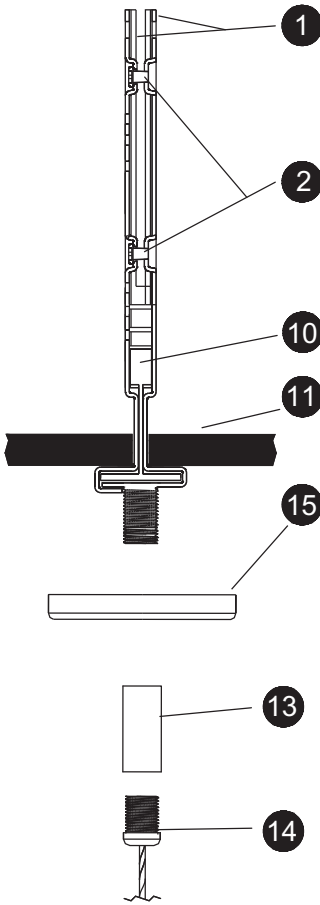

PARTS LIST

- 1 Assembled T-grid Clips
- 2 Clip Screws
- 3 Armored Cable (By Others)
- 4 Power Cord (By Others)
- 5 Wire Nut (By Others)
- 6 4" Octogon Junction Box (By Others)
- 7 Plastic Grommet (By Others)
- 8 Power Cord
- 9 Grommet
- 10 T-grid (By Others)
- 11 Ceiling Tile (By Others)
- 12 Power Feed Canopy
- 13 Threaded Sleeve M10
- 14 Aircraft Cable
- 15 Non-Feed Canopy
- 16 Connection plate kit



Notice: Always turn off the power supply from main circuit breaker before installing or maintaining fixture.




Installation Instruction

Recessed mount


Notice: Always turn off the power supply from main circuit breaker before installing or maintaining fixture.

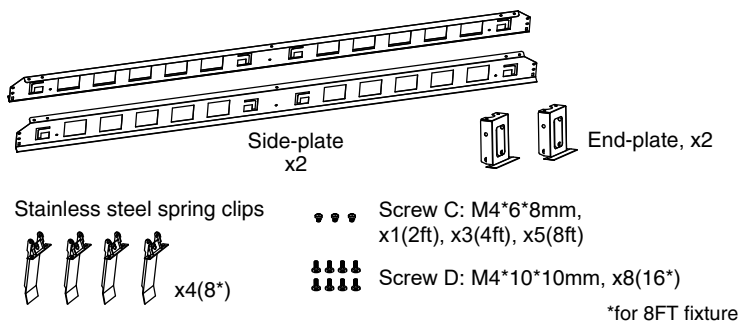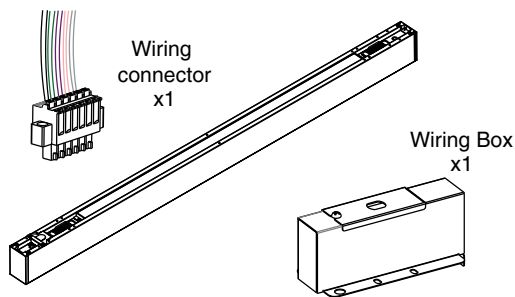


1. Remove original wiring cover Plate A and B.

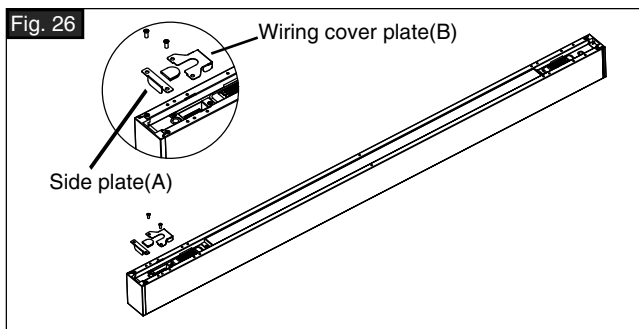


3. Use Screw C to secure the side plates(should be executed on 4ft/8ft fixtures). Secure wiring connector to fixture by 2 screws as shown.

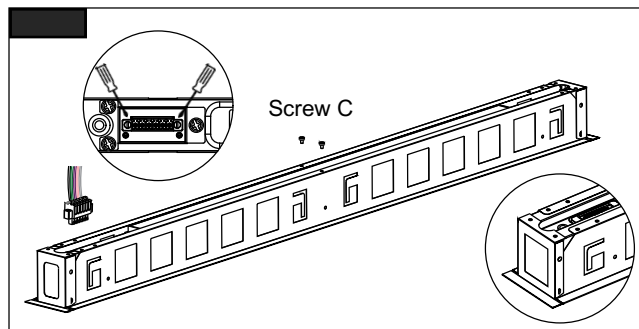


5. Secure the Pipe to the access plate removed from the wiring box and make wiring.

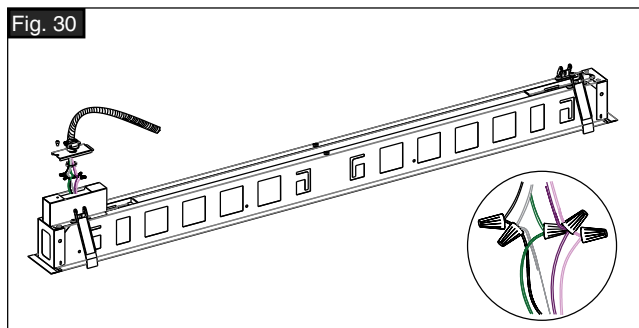


2. Remove the 4 screws on fixture back, attach Side-plates and end-plates to fixture.

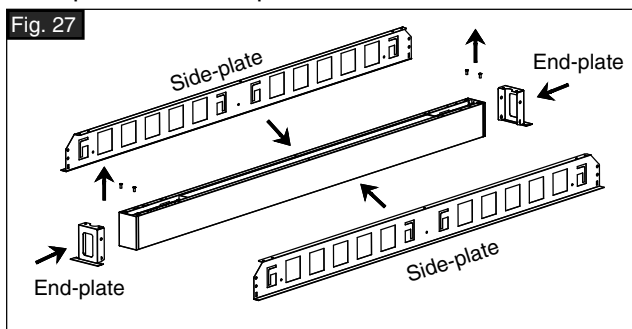

4. Attach spring clips and wiring box to side plates. Use Screw D to secure side plates, wiring box and all clips. Use screws removed in Fig. 27 to lock the end-plates.

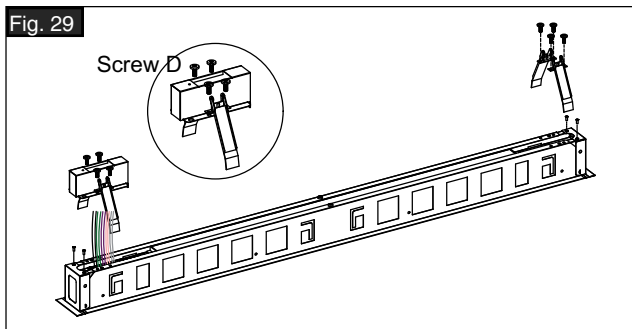


6. Attach the access plate and Pipe to the wiring box.

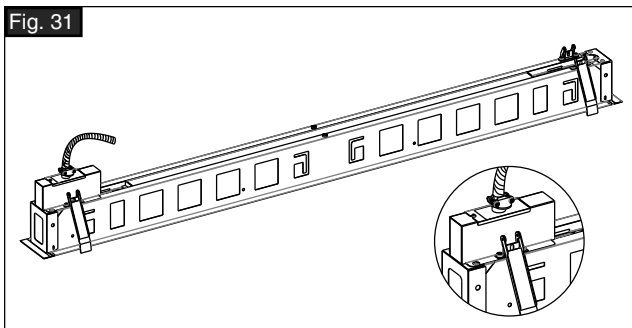

Installation Instruction


7. Align fixture to pre-cut hole, lift the spring clips and insert fixture to the ceiling.

Fig. 32

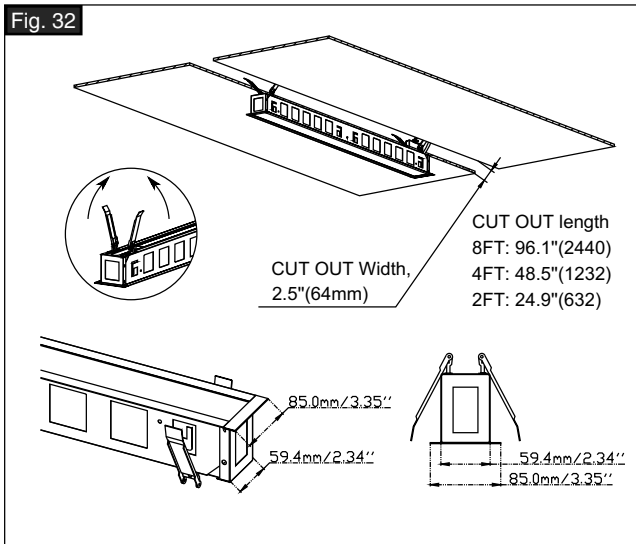

8. Clean up fingerprints and stains. The installation is completed.


Fig. 33

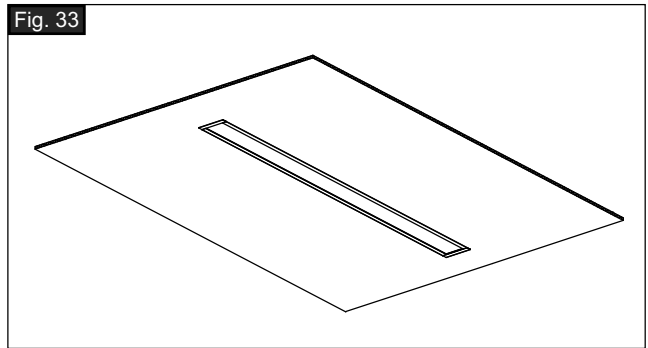

Please isolate two dimming wires (pink and purple) by P2 terminal individually if no need dimming;

Installation Instruction

Field-Adjustable Wattage & CCT

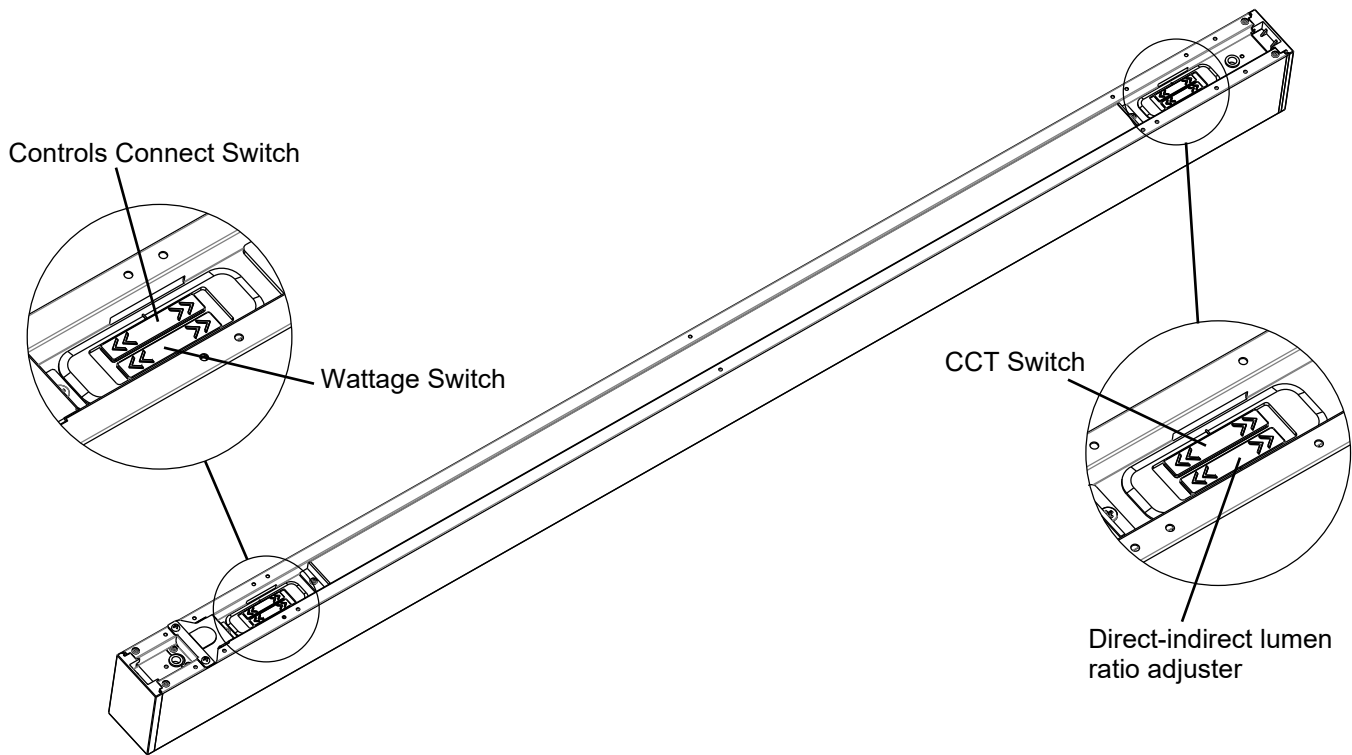

End users can fine-tune their lighting environment using dedicated DIP switches, as depicted in the diagram. These switches provide precise control over three key aspects of the lighting system:

Color Temperature: Users can select from 5 different CCT (Correlated Color Temperature) settings, allowing them to achieve the perfect ambiance for their space.

Lumen Output: The system offers 4 power options, enabling users to adjust the brightness to suit their needs.

Direct-to-Indirect Lumen Ratio: With 3 available settings, users can balance the distribution of light, choosing between more direct illumination and a softer, more diffused effect.

By leveraging these options, users can create a customized lighting setup that meets their specific requirements for color temperature, brightness, and light distribution.


There is also a controls connect switch which enables selective isolation/connection of adjacent fixture driver dimming wires while managing dimmable circuit interoperability across interconnected lighting systems. For example, it enables sensor to control designated one or multiple fixtures via parallel-connected dimming wires. **When set to OFF, the dimming wire contactor on the fixture end near the switch is disconnected.**

Installation Instruction




Notice: Always turn off the power supply from main circuit breaker first!

Controls Connect Switch instruction

When set to OFF, the dimming wire contactor on the fixture end near the switch is disconnected.

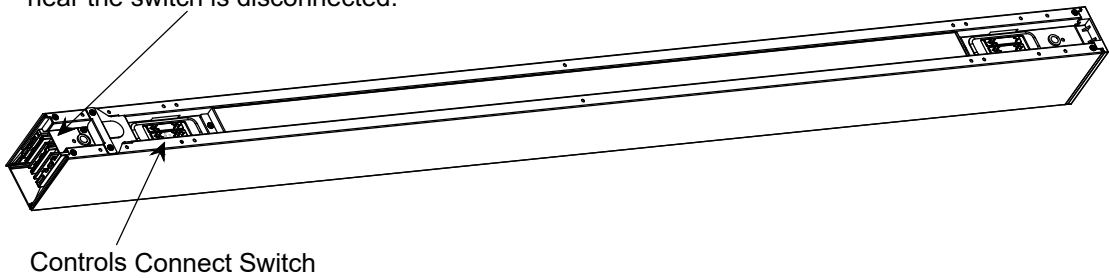

Multiple fixtures and sensors connection

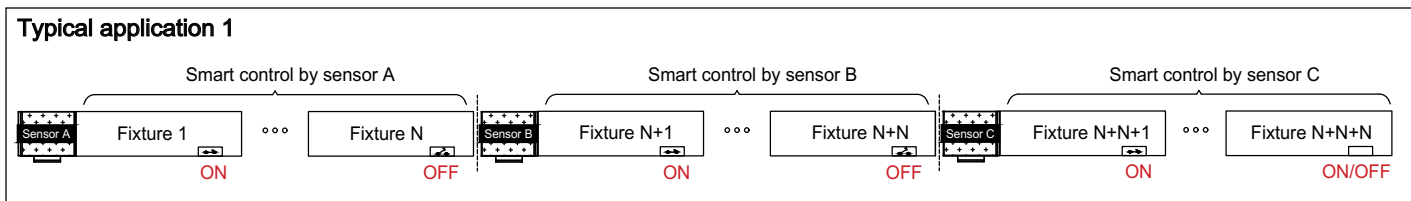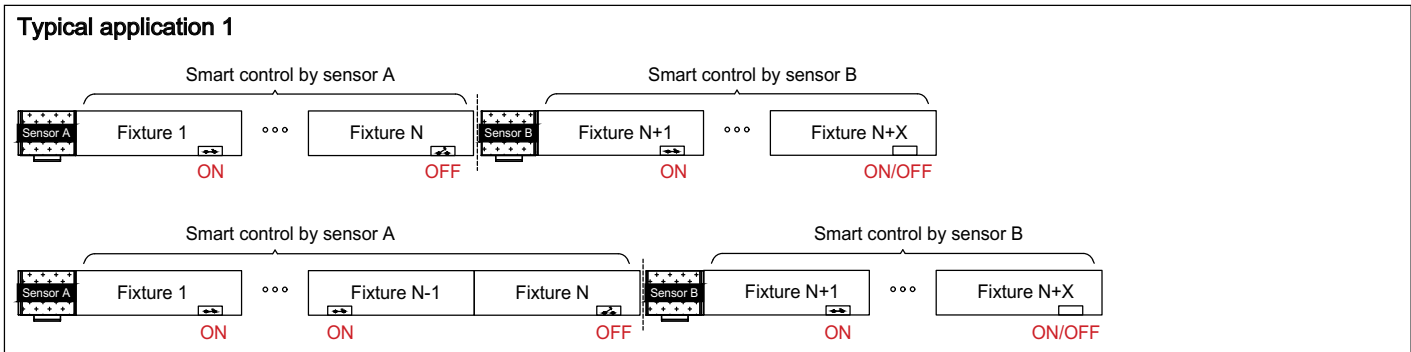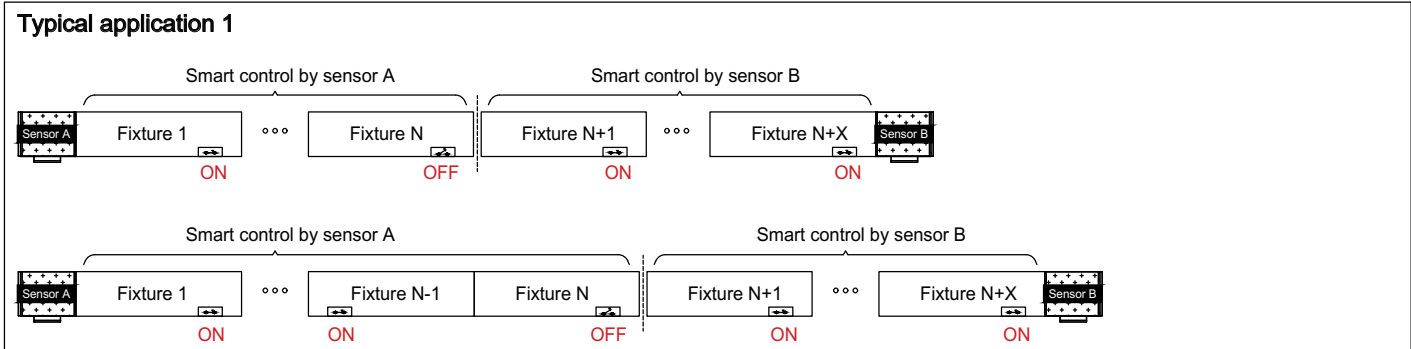

-  Controls connect switch(on)
-  Controls connect switch(off)
-  Controls connect switch(on or off)

Installation Instruction

Notice: Always turn off the power supply from main circuit breaker first!

Sensor box

End-of-Row Installation (first or last fixture)

Installation Step

1. Attach the sensor box to the target fixture after removing the fixture end-cap.(Fig. A)
2. Install the connect plate to strengthen the combination. (Fig. B&C)
3. Attach the suspension cable to the combination.(Fig. C)
4. Remove the receptacle cover and install the sensor. (Fig. D)

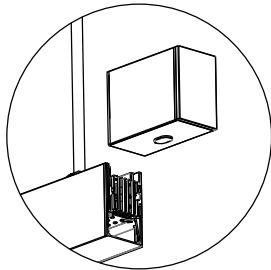
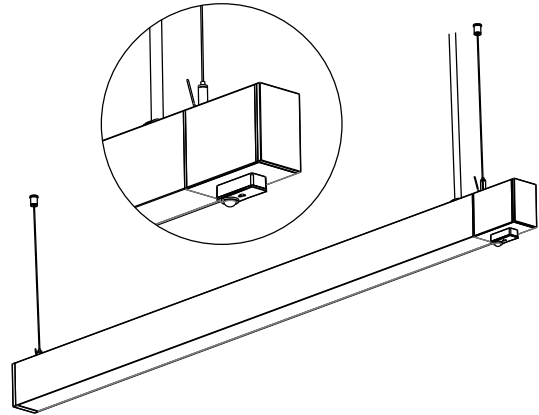


Fig. A




Fig. B




Fig. C




Fig. D

Mid-Row Installation (between two fixtures)

Installation Step

1. Attach the sensor box to middle position of the 2 target fixtures.(Fig. E)
2. Install 2 connection plates to strengthen the combination. (Fig. E&F)
3. Attach the suspension cable to the combination.(Fig. F&G)
4. Remove the receptacle cover and install the sensor. (Fig. G)

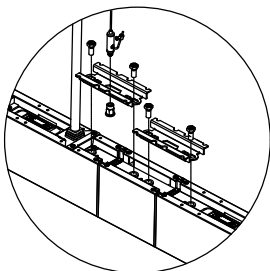


Fig. E

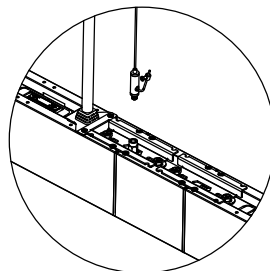


Fig. F

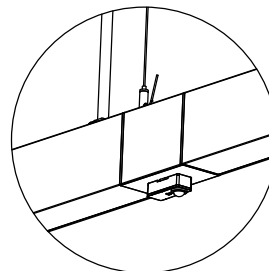


Fig. G