


## Crystall Sconce Assembly & Installation Guide

- Please follow the assembly instructions closely. Improper assembly or installation can result in personal or property damage. Mounting hardware has been provided for mounting to a junction box. Unique or alternative installation types may require different mounting hardware, which has not been included. Always consult with a licensed electrician before installation.
- This fixture has been rated for (1) 25-watt maximum E12 Type T6 incandescent bulb (1) 25-watt E12 Type T6 incandescent or (1) 6-watt maximum E12 TYPE T6 LED bulb (not included). To avoid the risk of fire, do not exceed the recommended wattage.
- This Sconce is dimmer-switch compatible and may be used with a forward- or reverse-phase dimmer switch.
- Keep cord at least 3 feet (91cm) away from cribs, bassinets, and toddler beds. Keep out of reach of children under 3 years of age.
- Read all warnings and instructions to reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts, abrasions and other hazards.
- Read all warnings and instructions to reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts, abrasions and other hazards.
- Make sure that you have all necessary parts by checking the parts list. If any part is missing or damaged.
- This product must be installed in accordance with the applicable local & national electrical codes.
- Do not substitute any parts, leave parts out, or use any parts that are worn or broken. All parts must be used as indicated in these instructions.
- All wires are connected. When unpacking, be careful not to pull the wires, as damage may result. Do not connect electricity until the fixture is fully assembled. To reduce the risk of fire, electrical shock, or personal injury, always turn off the fixture and allow it to cool before replacing the light bulb. Do not touch or look directly at the bulb when the fixture is illuminated. Keep flammable materials away from the lit bulb.
- Do not use polishes or cleaners on the fixture. Wipe clean with a soft, dry cloth.

### Parts List

- (A) Junction Box, **fixture-rated** (not included)
- (B) Mounting Bolts (2 pcs, for junction box only)
- (C) Wire Nuts (3 pcs)
- (D1) Wall Plate (1 pc)
- (D2) Nut Caps (2 pcs)
- (D3) Nuts (2 pcs)
- (E) Fixture Body (1 pc)
- (E1) Bottom Bracket (1 pc)
- (E2) Top Bracket (1 pc)
- (E3) Bolts (2 pcs)
- (F) Glass Block (1 pc)
- (G) Bulb (1 pc)
- (H) Safety Cable (1 pc)

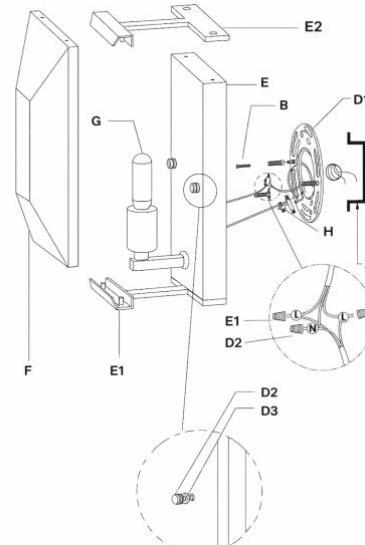

### Assembly and Installation

Shut off the main electrical supply from the fuse box or circuit breaker panel.

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Turn off power to the junction box (A) where the fixture will be installed.
3. Loosen the nut caps (D2) and nuts (D3), then remove the wall plate (D1) from the fixture body (E).
4. Attach the wall plate (D1) to the junction box (A) with mounting bolts (B).
5. Carefully inspect the fixture wires. One is the ground wire (marked with  $\pm$ ). The second is the neutral wire (marked with N).
6. The third wire is the live/hot wire (marked with L).
7. Connect the ground wire to the grounding wire of the power supply cable using a wire nut (C).  
NOTE: It is imperative that the outlet box in your home is properly grounded.
8. Connect the neutral wire to the neutral wire of the power supply cable using a wire nut (C).
9. Connect the live/hot wire to the live/hot wire of the power supply cable using a wire nut (C).  
CAUTION: Do not reverse the hot and neutral connections; otherwise, safety will be compromised.
10. Attach the fixture body (E) to the wall plate (D1) using nuts (D3) and nut caps (D2).
11. Install the light bulb (G) into the socket.
12. Place the glass block (F) onto the bottom bracket (E1), then tighten the bolt (E3) to secure the top bracket (E2) to the fixture body (E) using a screwdriver.
13. Restore power to the junction box and test the fixture. Assembly is complete.

**PARTS INCLUDED**

(A) Junction Box, fixture-rated (not included)

(B) Mounting Screws and Plastic Plugs (6 sets; for concrete wall or drywall)

(B1) Wall Plate (1)

(B2) Bracket Bolts (2)

(B3) Top Bracket (1)

(B4) Middle Brackets (2)

(B5) Glass Fixing Bolts (4)

(B6) Bottom Bracket (1)

(B7) Nuts (2)


(B8) Nut Caps (2)

(C) Terminal Box (1)

(D) Bulbs (3)

(E) Fixture Body (1)

(G) Safety Cable (1)

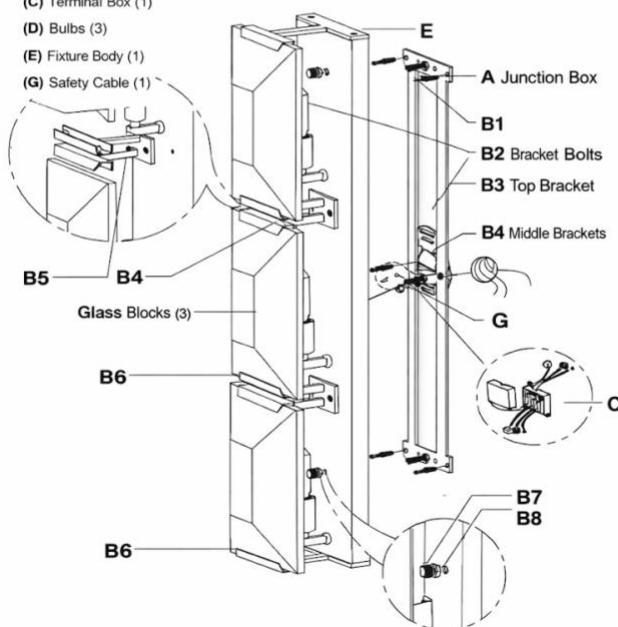**Assembly & Installation Instructions**

1. Carefully remove all parts from the box and remove all plastic coverings.
2. Turn **OFF** power to the junction box (A) where the fixture will be installed.
3. Loosen bolts (B2 & B5) and remove the **top bracket (B3)** and **middle brackets (B4)** from the fixture body (E).
4. Loosen nut caps (B8) and nuts (B7), then remove the **wall plate (B1)** from the fixture body (E).
5. Attach the wall plate (B1) to the junction box (A) using mounting screws and plastic plugs (B).
6. Carefully inspect the fixture wires:
  - Ground wire (marked  $\pm$ )
  - Neutral wire (marked **N**)
  - Live/Hot wire (marked **L**)
7. Connect the ground wire to the grounding wire of the power supply cable using terminal box (C).  
**NOTE: It is imperative that the outlet box in your home be properly grounded.**
8. Connect the neutral wire to the neutral wire of the power supply cable using terminal box (C).
9. Connect the live/hot wire to the live/hot wire of the power supply cable using terminal box (C).  
**CAUTION: Do not reverse the hot and neutral connections; otherwise safety will be compromised.**
10. Attach the fixture body (E) to the wall plate (B1) using nuts (B7) and nut caps (B8).
11. Install bulbs (D) into the lamp holders.
12. Attach the **bottom glass block (F)** onto the bottom bracket (B6).  
Adjust the middle bracket (B4) for alignment, then tighten bolts (B5).
13. Attach the **middle glass block (F)** onto the middle bracket (B4).  
Adjust the top bracket (B3) for alignment, then tighten bolts (B5).
14. Attach the **top glass block (F)** onto the top bracket (B3), and tighten bolts (B2) securely.
15. Restore power to the junction box and test the fixture.
16. Assembly is complete.