



## Howelsen

### PRODUCT DESCRIPTION

**Howelsen** circular pendants are made of extruded aluminum with direct/indirect components and a glare free acrylic ring with additional hanging elements. Sizes are 16", 24", 32", 40", 48", 60" and 72", and can be combined as desired to create multiple ring masterpieces. Over 6500 powder coated colors, custom suspension cable lengths are available. 3000K/3500K/4000K color selectable by switch . RGBW and CCT tunable / dimmable using remote, DMX App and Google Alexa. Ships assembled. resistant against yellowing, height adjustable, offering over 6,500 custom powder coated colors, ships Assembled.

### FEATURES

- 5-year limited warranty.
- Ships assembled.
- Direct and Indirect Illumination.
- Extruded aluminum housing up to 72", 1 continuous ring without joints.
- Fixture lumens per watt ratio 75 LPW-87 LPW.

### SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location.
- Gloss White, Black Jack, Platinum Silver and Oil bronze color finish as standard, 6,500 custom colors are available.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

### PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch



SB-U01E



SB-U01F



SB-U01G

**MODEL INFORMATION:**

**Example: SB-U01E20WSB**

Products Series	Wattage/Size	Options	RGBW/CCT Select Only	Profile Finishes	Aircraft Cable
*SB-U01E	*20W = 16"	*S=1-10V dimming, CRI 90 3000K/3500K/4000K Color Selectable (Standard), 4000K factory color default set	T=3K-4K Tunable White	*B=Black Jack	*Blank=10' foot 120" (Standard)
SB-U01F	30W = 24"		R4=RGB+4000K (standard)	S=Platinum Silver	5'=5 foot 60"
SB-U01G	40W = 32"	L=ELV/Triac dimming with 3000K/3500K/4000K Color Selectable	R3=RGB+3000K	W=Gloss White	15'=15 foot 180"
	50W = 40"	D=DMX		O=Oil Rubbed Bronze	20'=20 foot 240"
	60W = 48"	Z=ZigBee			25'=25 foot 300"
	70W = 60"				
	80W = 72"				
			DMX for RGBW and Tunable White, control by Wall Switch or DMX control system. ZigBee for RGBW and CCT tunable / dimnable using remote, DMX, App and Google Alexa.	<b>Do not select this column if selected "S"</b>	<b>Full Color Name or RAL number for Custom Colors, select from <a href="#">Color Collections</a></b>

**LUMEN OUTPUT**

Model Number	Size	Wattage	Kevin	Lumen
SB-U01U/F/G	16"	20W	3000K/3500K/4000K	1482 lm
	24"	30W	3000K/3500K/4000K	2132 lm
	32"	40W	3000K/3500K/4000K	2823 lm
	40"	50W	3000K/3500K/4000K	3606 lm
	48"	60W	3000K/3500K/4000K	4779 lm
	60"	70W	3000K/3500K/4000K	5361 lm
	72"	80W	3000K/3500K/4000K	7000 lm

## STANDARD COLOR FINISHES



GLOSS WHITE



PLATINUM SILVER



BLACK JACK




OIL RUBBED BRONZE

In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample or any RAL finish. Add texture and originality to create a perfect match.

## EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

## RGBW/TUNABLE WHITE SMART CONTROL

[SEE SPEC AND VIDEO](#)


# Get Smart

Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.


## DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"

15.57" = 16" / 23.62" = 24" / 31.5" = 32" / 39.37" = 40" / 47.24" = 48" / 59.06" = 60" / 70.87" = 72"


**SB-U01E**

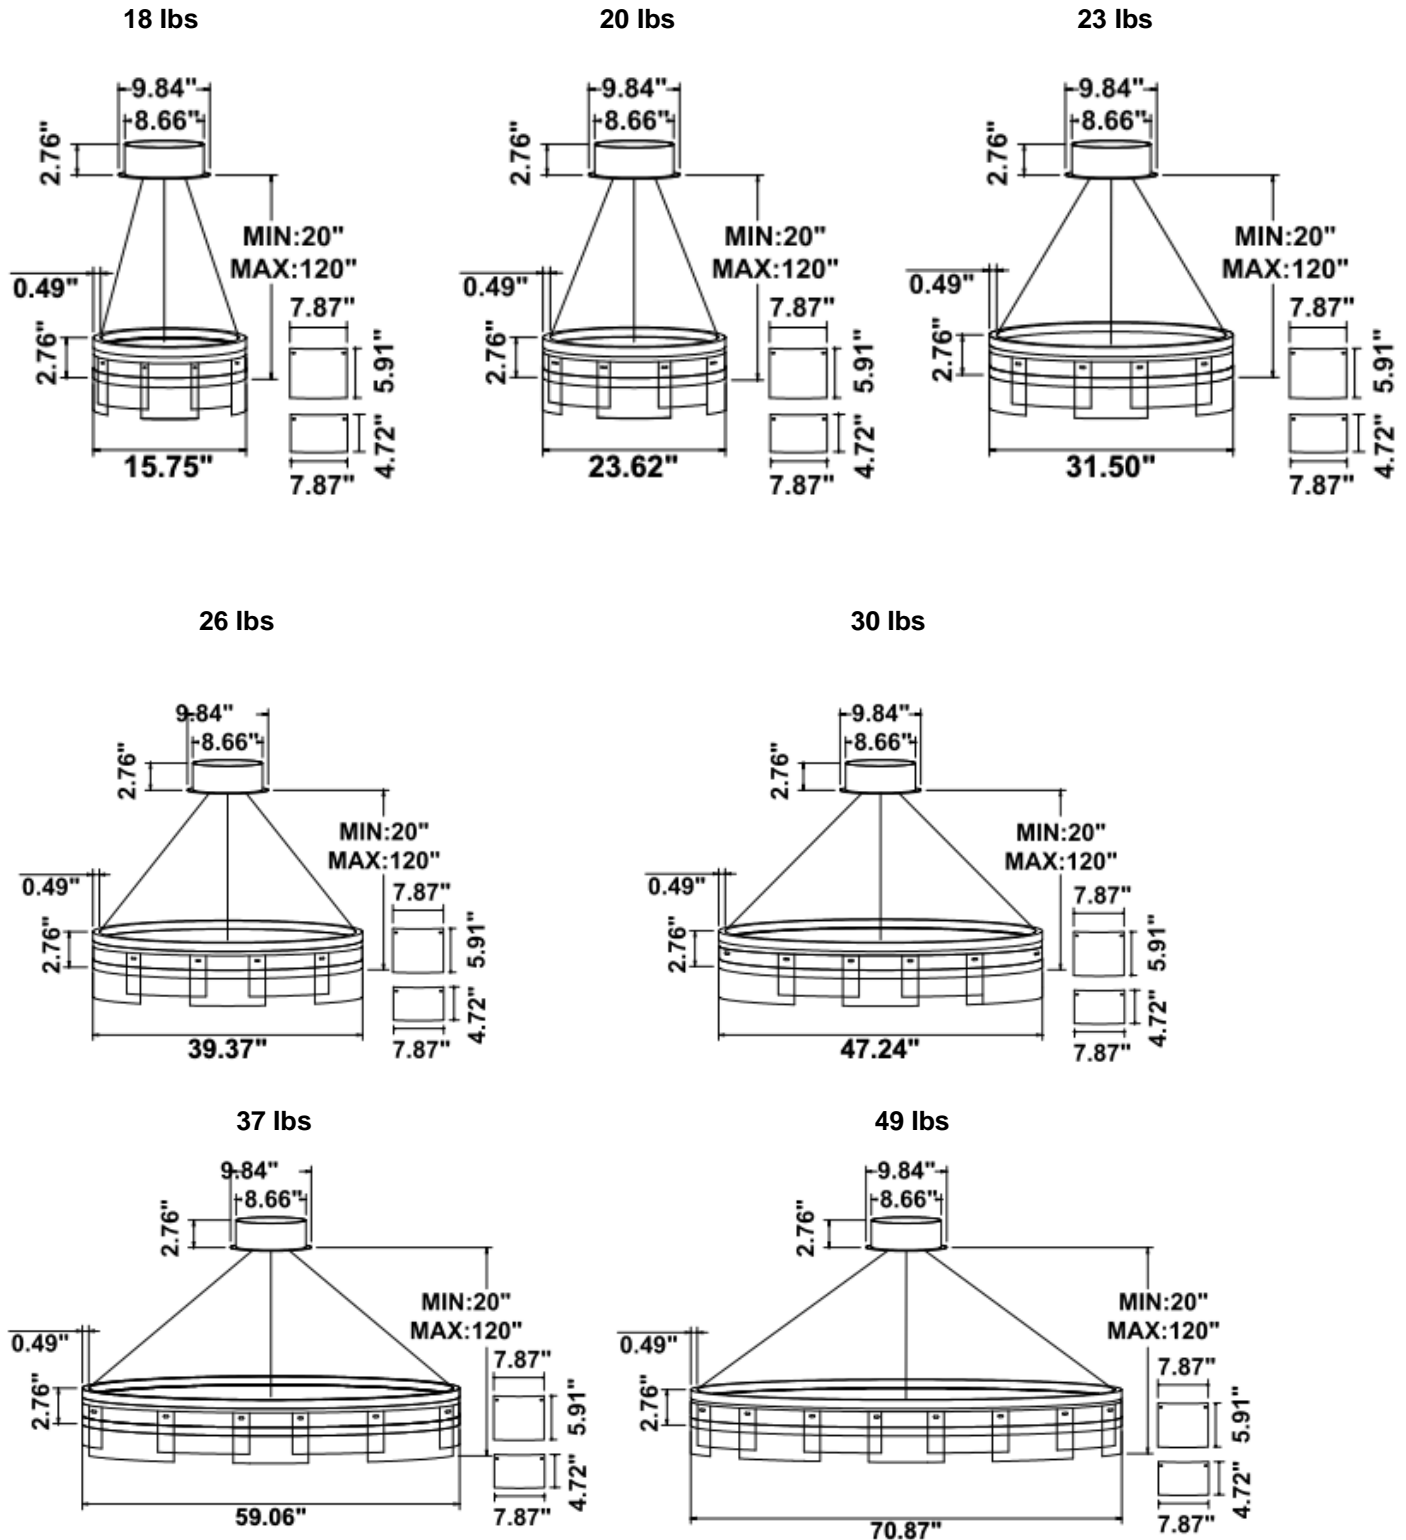

**SB-U01F**

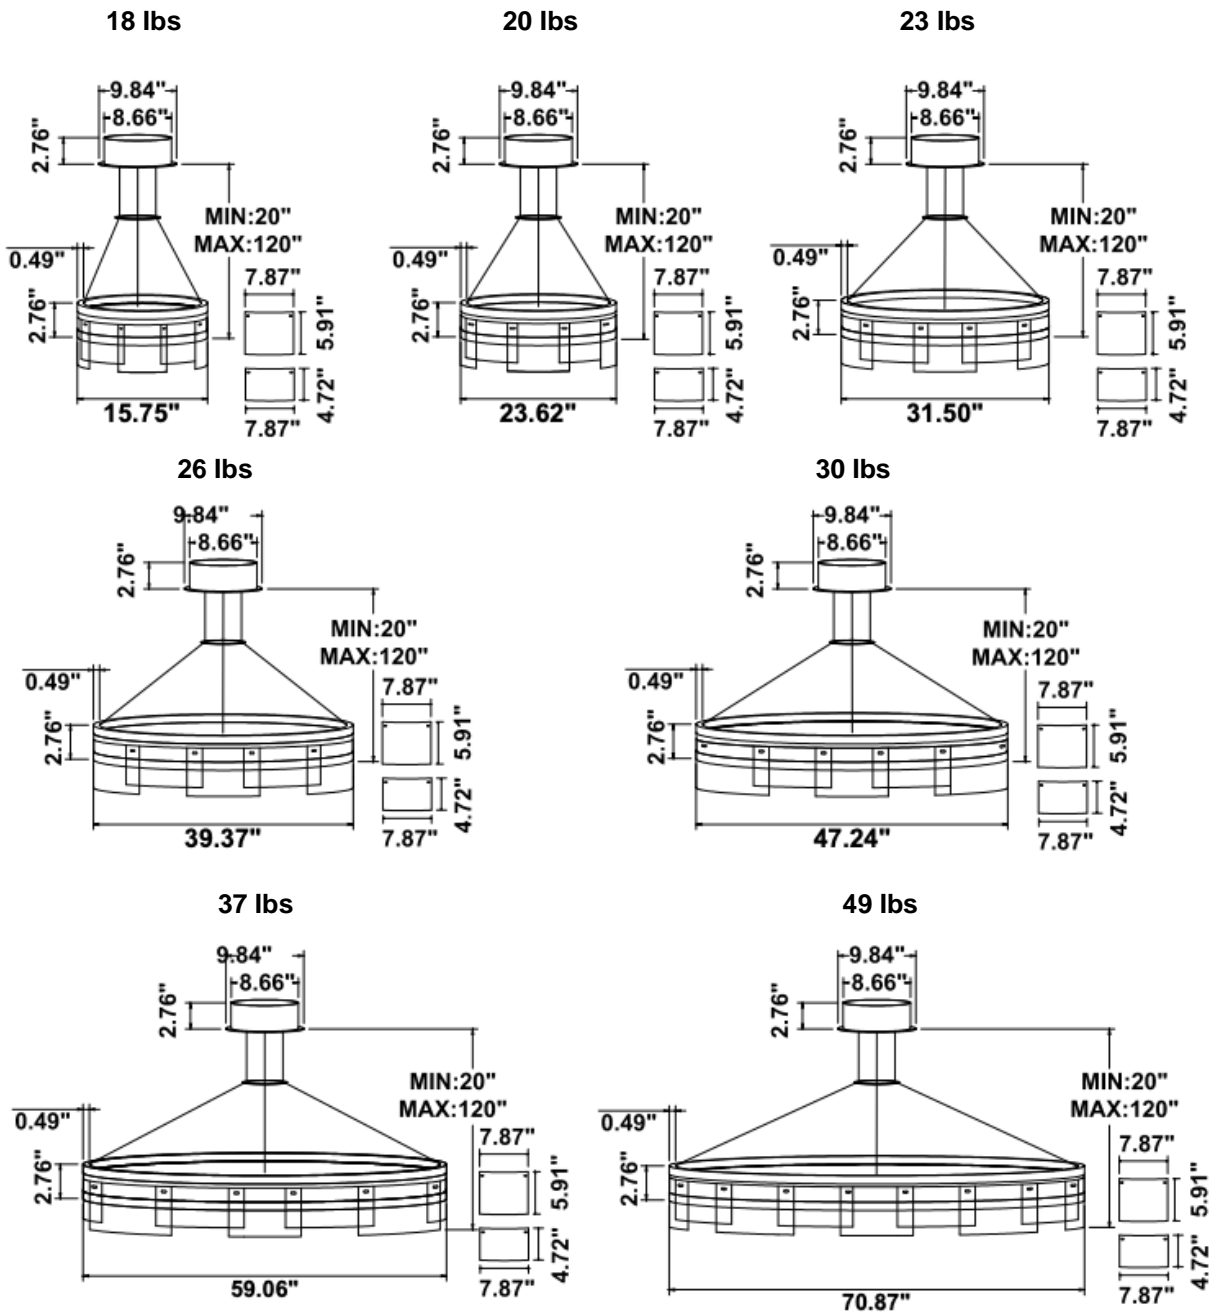


**SB-U01G**

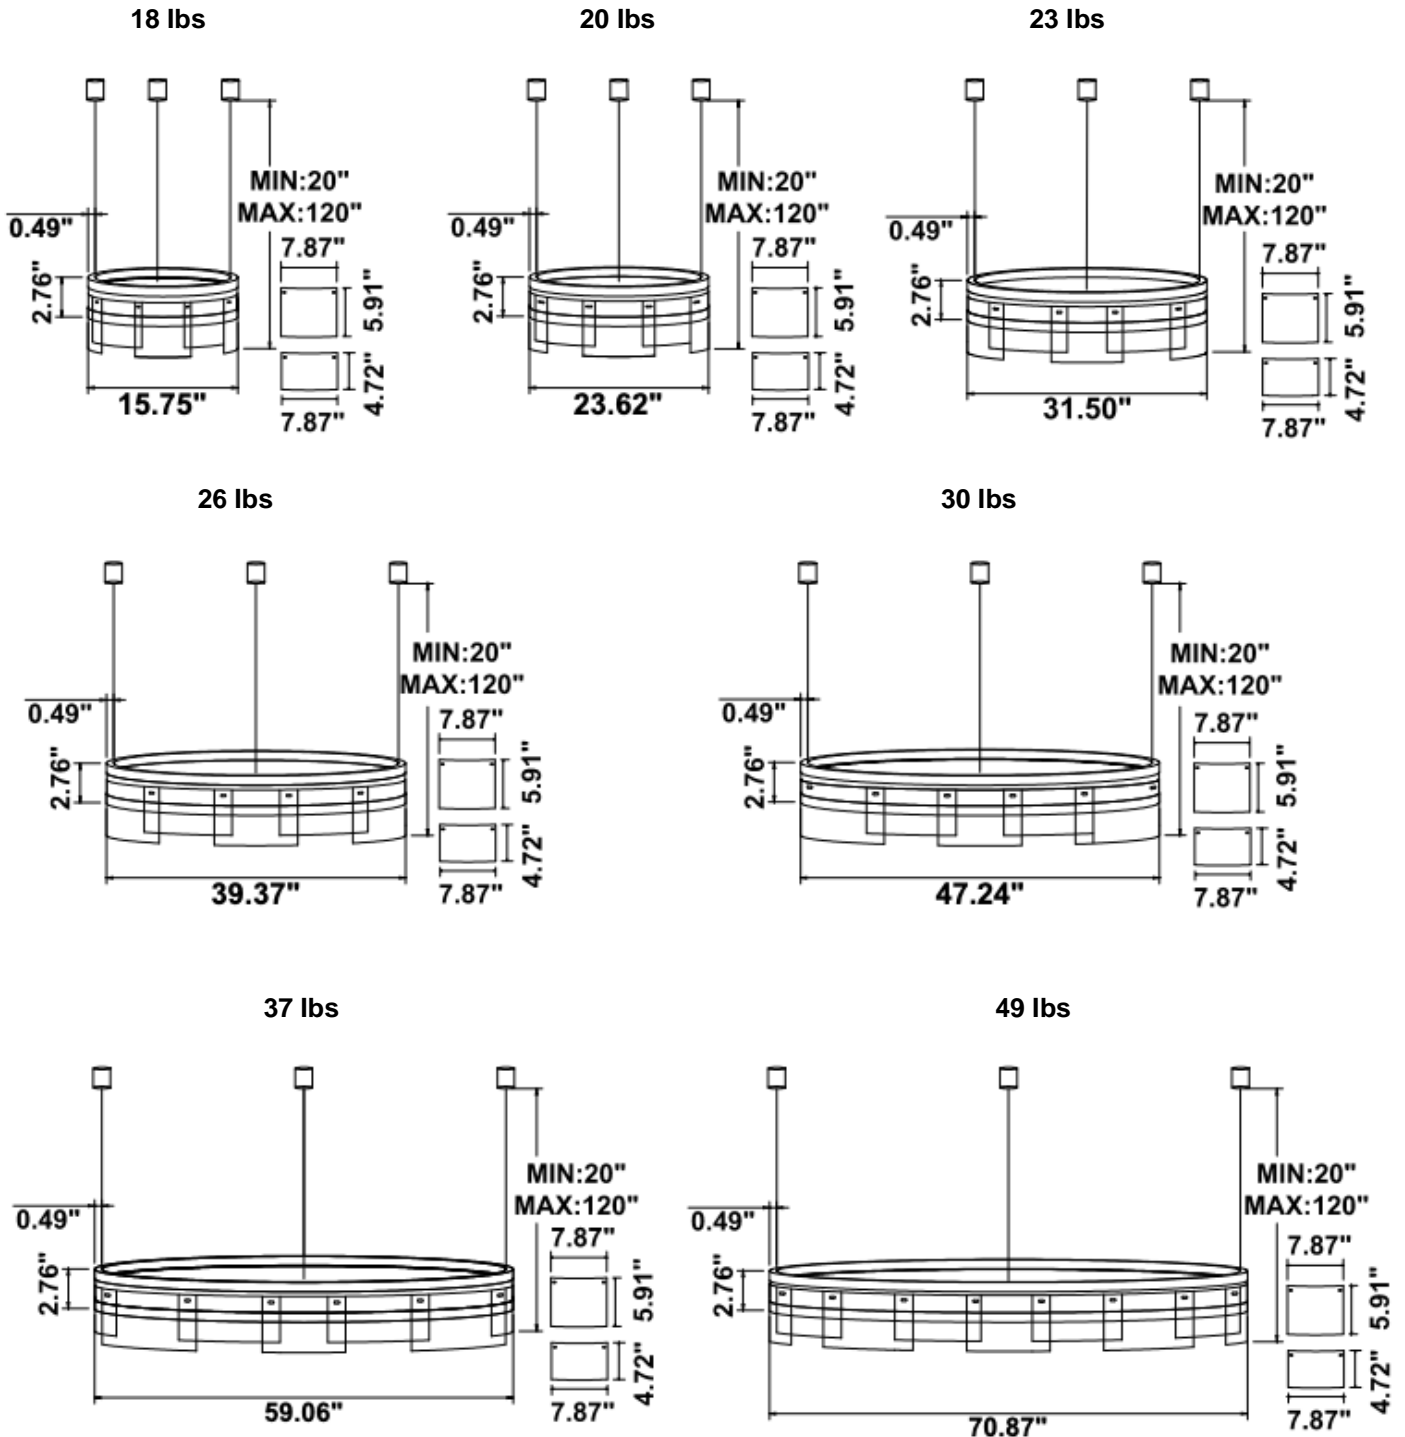




**PHOTOMETRIC:**


**16" 20W @ 4000K**

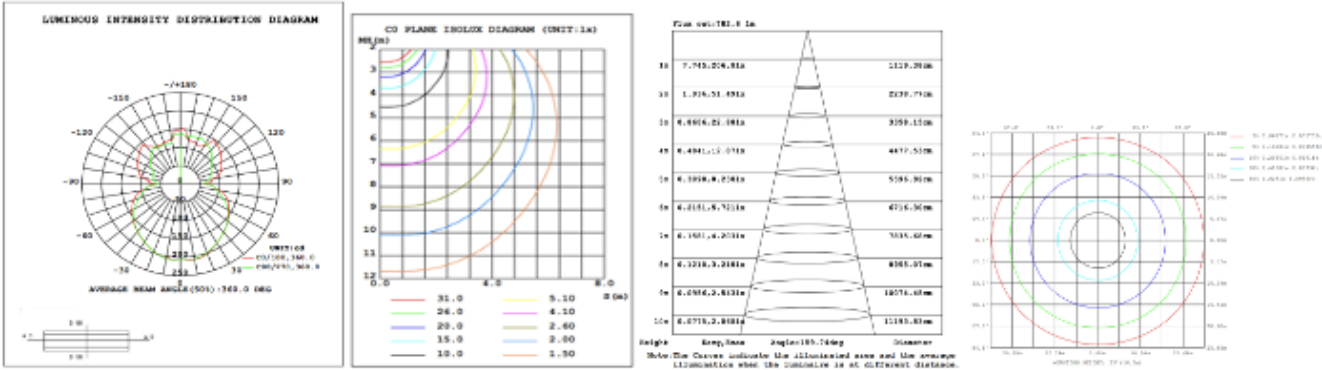


**24" 30W @ 4000K**

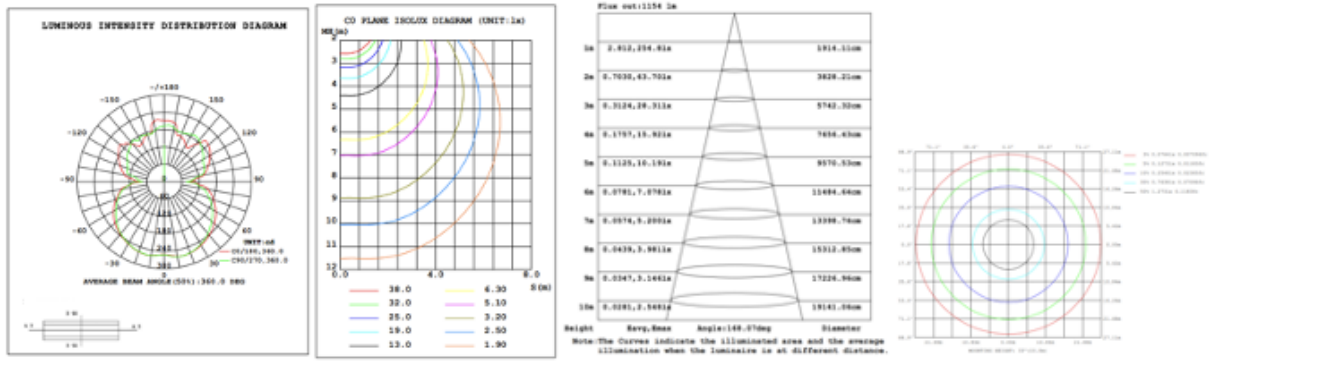


**32" 40W @ 4000K**

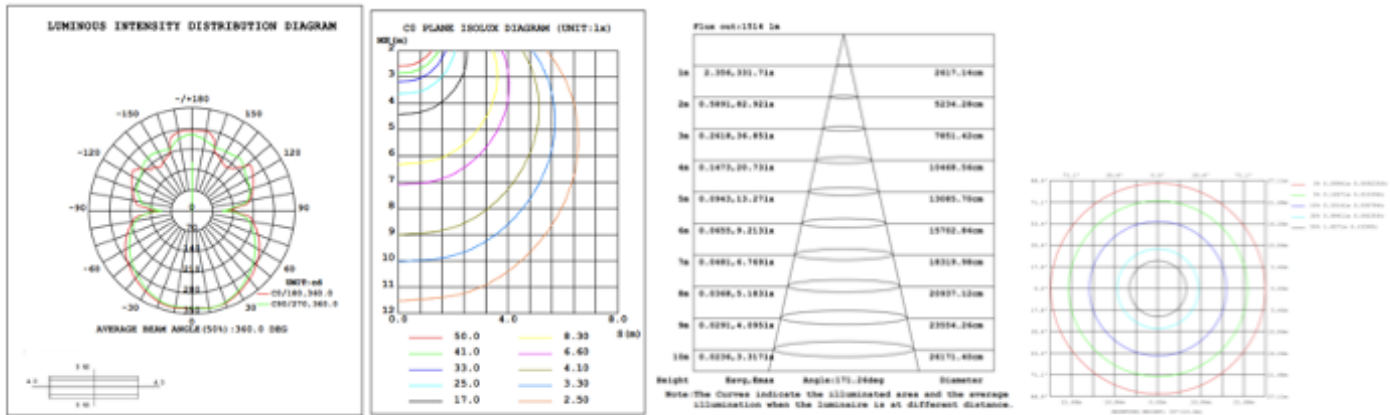


**40" 50W @ 4000K**

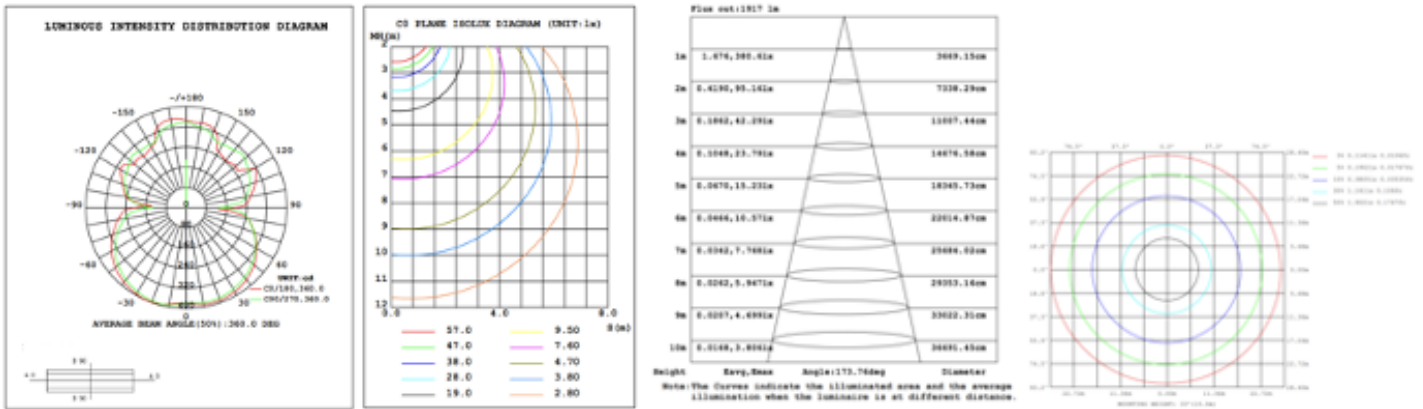

**48" 50W @ 4000K**

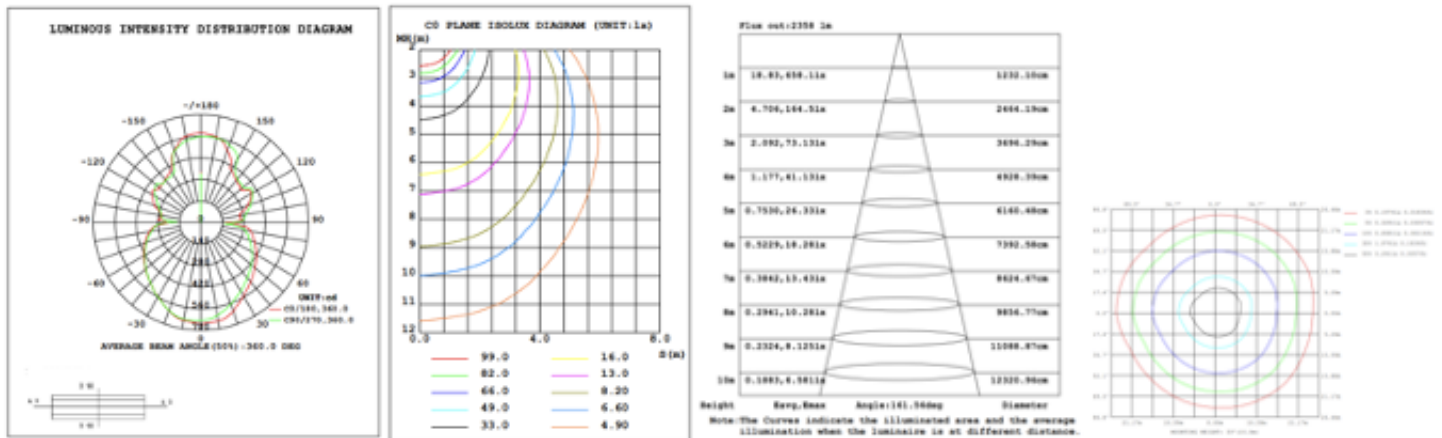

**60" 70W @ 4000K**

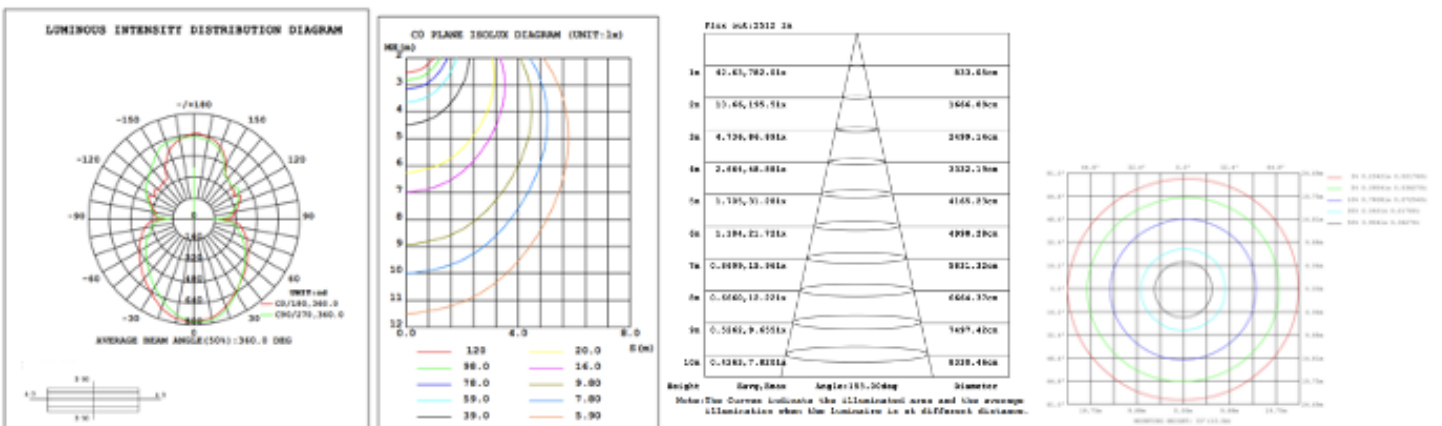



**72" 80W @ 4000K**

