
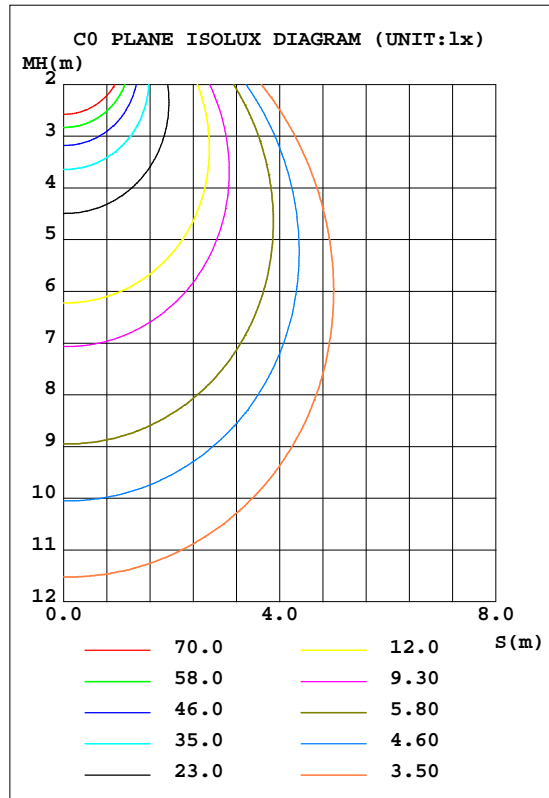


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.17V I:0.1025A P:21.208W PF:0.9397 Freq:50.00Hz Lamp Flux:1616.73x1 lm		
NAME: SB-C01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*12mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 76.23 lm/W			
MODEL		I _{max} (cd)	470.3	S/MH(C0/180)	1.12
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.15
RATED VOLTAGE(V)	--	TOTAL FLUX(lm)	1616.7	η UP, DN(C0-180)	9.3,39.6
NOMINAL FLUX(lm)	1616.73	CIE CLASS	SEMI-D.	η UP, DN(C180-360)	9.3,41.7
LAMPS INSIDE	1	η up(%)	18.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	--	η down(%)	81.4	CIBSE SHR MAX	1.35

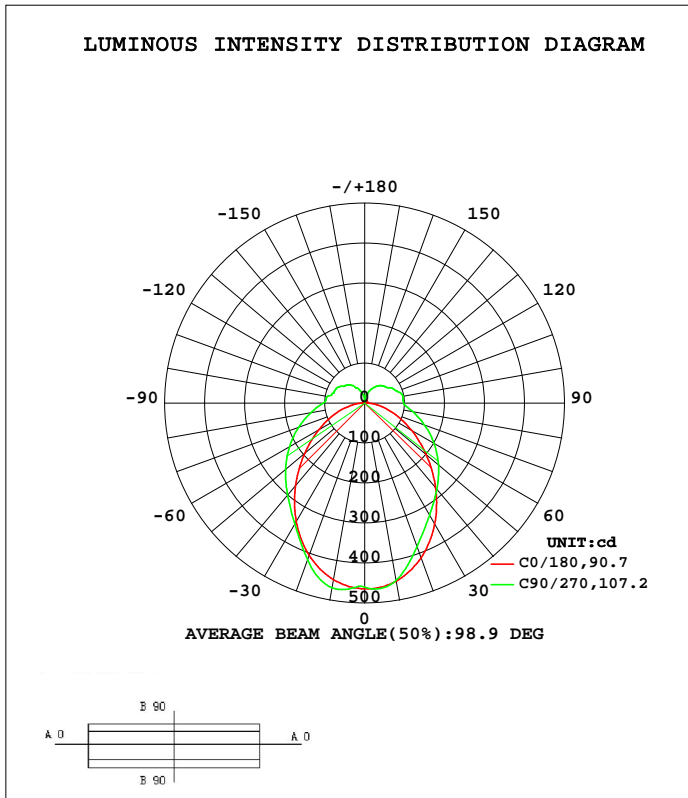

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	452.6	458.2	450.7	452.0	448.4	462.6	469.0	463.5	0- 10	44.00	44.00	2.72,2.72
20	412.3	405.1	382.7	399.2	405.5	428.5	417.7	429.9	10- 20	123.2	167.2	10.3,10.3
30	350.1	337.9	324.9	331.5	342.8	360.9	349.7	362.5	20- 30	174.6	341.8	21.1,21.1
40	276.2	281.2	280.9	274.9	269.0	295.6	300.2	297.9	30- 40	198.1	539.9	33.4,33.4
50	201.5	233.3	241.3	227.6	196.1	243.1	258.4	245.5	40- 50	200.6	740.5	45.8,45.8
60	134.9	190.5	200.0	186.0	131.7	198.9	217.0	200.9	50- 60	187.1	927.6	57.4,57.4
70	80.07	151.3	159.1	147.6	78.53	159.7	175.2	161.1	60- 70	161.9	1090	67.4,67.4
80	36.26	115.6	121.9	113.2	34.75	124.2	136.2	125.2	70- 80	129.8	1219	75.4,75.4
90	3.923	89.93	97.85	88.27	4.016	93.42	103.7	94.03	80- 90	96.33	1316	81.4,81.4
100	4.309	85.77	97.05	84.21	4.217	81.00	95.76	80.12	90-100	78.92	1395	86.3,86.3
110	4.988	61.16	87.18	60.52	4.750	60.35	82.14	60.53	100-110	62.93	1457	90.1,90.1
120	5.596	56.05	77.06	53.71	5.315	56.36	78.58	56.06	110-120	50.83	1508	93.3,93.3
130	5.898	45.91	65.51	44.97	5.704	46.46	66.64	46.82	120-130	39.89	1548	95.8,95.8
140	6.010	38.23	57.30	37.64	5.441	37.76	60.23	40.59	130-140	30.60	1579	97.7,97.7
150	5.995	32.81	45.16	26.35	5.259	27.42	44.60	35.75	140-150	20.85	1600	98.9,98.9
160	5.870	23.76	30.67	14.65	5.425	15.57	33.61	26.30	150-160	11.49	1611	99.7,99.7
170	6.161	13.41	17.81	10.21	5.928	13.80	21.49	17.35	160-170	4.669	1616	99.9,99.9
180	6.290	6.221	4.846	5.973	6.309	6.244	4.866	6.059	170-180	0.9480	1617	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 641.01 lm

%lum = 39.6%
%lamp = 39.6%

Conical surface Flux(120deg): 927.62 lm


%lum = 57.4%
%lamp = 57.4%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XIAOMI
Test Date:2023-06-05

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.17V I:0.1025A P:21.208W PF:0.9397 Freq:50.00Hz Lamp Flux:1616.73x1 lm		
NAME: SB-C01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*12mm	

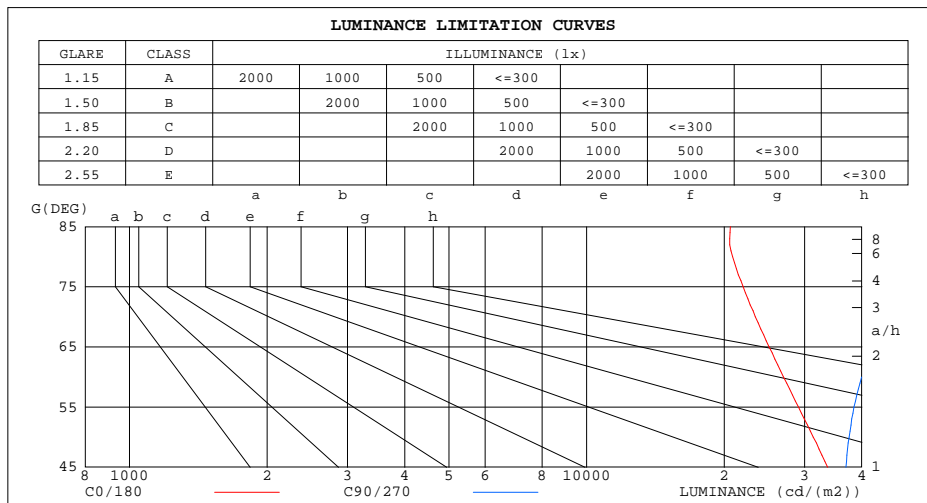

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	20634	121565
80	20882	70186
75	22006	54032
70	23412	46512
65	25100	42494
60	26988	39997
55	29078	38471
50	31347	37544
45	33685	36919


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.17V I:0.1025A P:21.208W PF:0.9397 Freq:50.00Hz Lamp Flux:1616.73x1 lm		
NAME: SB-C01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*12mm	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.15	1.15	1.15	1.10	1.10	1.10	1.01	1.01	1.01	.93	.93	.93	.85	.85	.85	.81
1.0	.97	.92	.88	.93	.88	.84	.85	.82	.78	.78	.75	.73	.72	.69	.67	.64
2.0	.84	.76	.70	.80	.74	.68	.74	.68	.64	.68	.63	.59	.62	.58	.55	.52
3.0	.73	.65	.58	.70	.63	.56	.65	.58	.53	.59	.54	.50	.55	.50	.47	.43
4.0	.65	.56	.49	.62	.54	.48	.57	.50	.45	.53	.47	.42	.49	.44	.40	.37
5.0	.58	.49	.42	.56	.47	.41	.51	.44	.39	.47	.41	.37	.44	.39	.35	.32
6.0	.52	.43	.37	.50	.42	.36	.46	.39	.34	.43	.37	.32	.40	.35	.30	.28
7.0	.47	.38	.32	.45	.37	.32	.42	.35	.30	.39	.33	.29	.36	.31	.27	.25
8.0	.43	.35	.29	.42	.34	.28	.39	.32	.27	.36	.30	.26	.33	.28	.24	.22
9.0	.39	.31	.26	.38	.31	.25	.36	.29	.24	.33	.27	.23	.31	.26	.22	.20
10.0	.36	.29	.23	.35	.28	.23	.33	.26	.22	.31	.25	.21	.29	.24	.20	.18

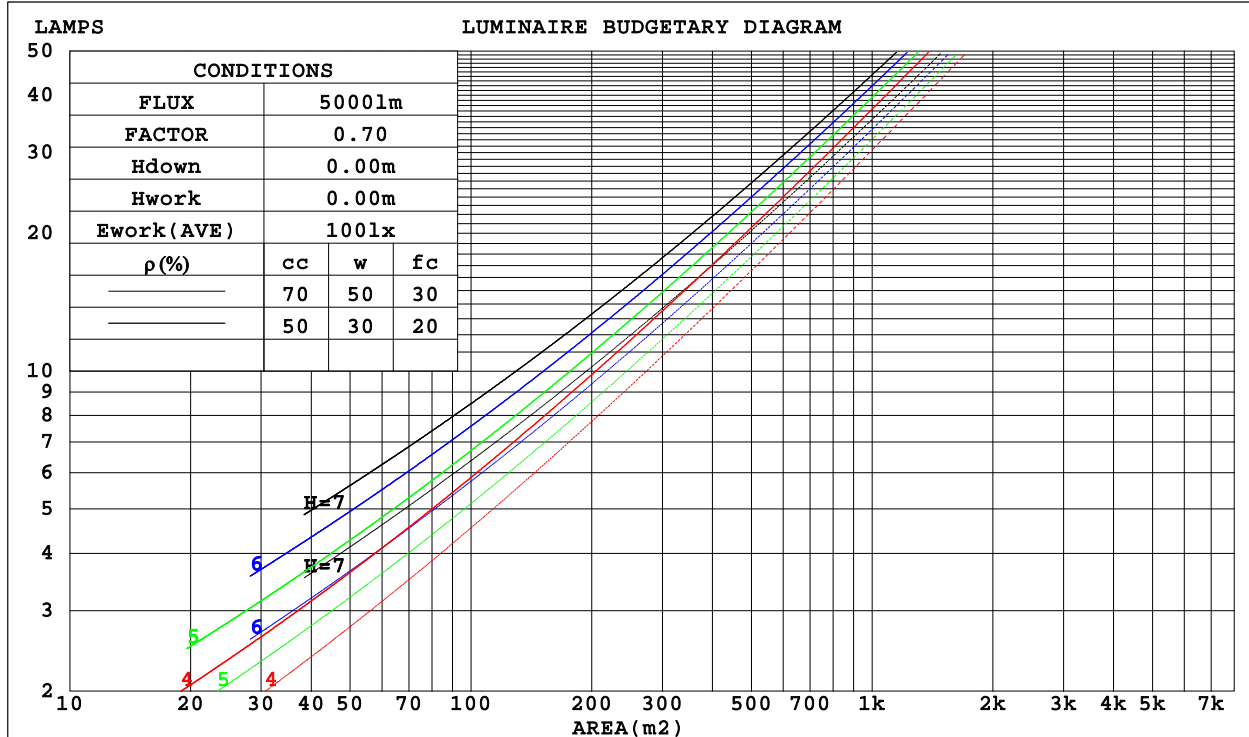

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.17V I:0.1025A P:21.208W PF:0.9397 Freq:50.00Hz Lamp Flux:1616.73x1 lm		
NAME: SB-C01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*12mm	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.356	.202	.064	.343	.195	.062	.319	.183	.058	.297	.171	.055	.276	.160	.052	
2.0	.312	.171	.053	.301	.166	.051	.279	.155	.048	.259	.145	.045	.241	.136	.043	
3.0	.280	.149	.045	.269	.144	.043	.250	.135	.041	.232	.127	.039	.215	.119	.037	
4.0	.254	.132	.039	.244	.128	.038	.226	.120	.036	.210	.113	.034	.195	.106	.032	
5.0	.232	.118	.034	.223	.115	.033	.207	.108	.032	.192	.101	.030	.178	.095	.029	
6.0	.213	.107	.031	.205	.104	.030	.191	.098	.028	.177	.092	.027	.164	.086	.026	
7.0	.197	.098	.028	.190	.095	.027	.177	.089	.026	.164	.084	.024	.152	.079	.023	
8.0	.183	.090	.025	.177	.087	.025	.165	.082	.023	.153	.077	.022	.142	.073	.021	
9.0	.171	.083	.023	.165	.081	.023	.154	.076	.022	.143	.072	.021	.133	.068	.020	
10.0	.161	.077	.021	.155	.075	.021	.145	.071	.020	.135	.067	.019	.125	.063	.018	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.332	.332	.332	.284	.284	.284	.194	.194	.194	.111	.111	.111	.036	.036	.036	
1.0	.327	.299	.274	.279	.256	.236	.191	.176	.163	.110	.102	.095	.035	.033	.031	
2.0	.319	.276	.240	.273	.237	.207	.187	.164	.144	.108	.096	.085	.035	.031	.028	
3.0	.311	.259	.218	.267	.224	.189	.183	.155	.132	.106	.091	.078	.034	.029	.026	
4.0	.303	.247	.203	.260	.213	.176	.179	.148	.124	.104	.087	.074	.033	.028	.024	
5.0	.296	.237	.193	.254	.205	.168	.175	.143	.119	.101	.084	.070	.033	.027	.023	
6.0	.288	.229	.186	.248	.198	.162	.171	.139	.114	.099	.082	.068	.032	.027	.022	
7.0	.282	.222	.180	.242	.192	.157	.167	.135	.111	.097	.079	.066	.031	.026	.022	
8.0	.275	.216	.176	.237	.188	.153	.164	.132	.109	.095	.078	.065	.031	.025	.021	
9.0	.269	.212	.173	.232	.184	.151	.161	.129	.107	.094	.076	.064	.030	.025	.021	
10.0	.263	.207	.170	.227	.180	.149	.157	.127	.106	.092	.075	.063	.030	.025	.021	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.17V I:0.1025A P:21.208W PF:0.9397 Freq:50.00Hz Lamp Flux:1616.73x1 lm										
NAME: SB-C01-20WSZ					TYPE:			WEIGHT:		
SPEC.:4000K					DIM.:			SERIAL No.:		
MFR.: SNOWBALL					SUR.:1000*12mm					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	23.3	24.6	23.8	25.1	25.7	24.4	25.7	24.9	26.2	26.7
3H	24.7	25.9	25.3	26.5	27.1	26.6	27.8	27.2	28.3	29.0
4H	25.3	26.5	25.9	27.0	27.7	27.8	28.9	28.4	29.5	30.1
6H	25.8	26.9	26.4	27.5	28.1	29.1	30.2	29.7	30.7	31.4
8H	26.0	27.0	26.6	27.6	28.3	29.8	30.8	30.4	31.4	32.1
12H	26.1	27.1	26.7	27.7	28.4	30.6	31.6	31.2	32.2	32.9
4H 2H	24.2	25.4	24.8	25.9	26.6	25.0	26.2	25.6	26.7	27.3
3H	26.0	27.0	26.6	27.6	28.3	27.5	28.5	28.1	29.1	29.8
4H	26.9	27.8	27.5	28.4	29.1	28.9	29.8	29.5	30.4	31.1
6H	27.6	28.4	28.3	29.1	29.8	30.4	31.2	31.0	31.8	32.6
8H	27.9	28.7	28.6	29.3	30.1	31.2	32.0	31.9	32.6	33.4
12H	28.1	28.8	28.8	29.5	30.3	32.2	32.9	32.8	33.5	34.3
8H 4H	27.7	28.5	28.4	29.2	29.9	29.3	30.1	30.0	30.7	31.5
6H	28.9	29.5	29.6	30.2	31.0	31.1	31.8	31.8	32.5	33.3
8H	29.4	30.0	30.2	30.7	31.6	32.2	32.7	32.9	33.4	34.3
12H	29.9	30.4	30.7	31.2	32.0	33.3	33.8	34.1	34.6	35.4
12H 4H	27.9	28.6	28.6	29.3	30.1	29.4	30.1	30.1	30.8	31.5
6H	29.3	29.9	30.0	30.6	31.4	31.3	31.9	32.0	32.6	33.4
8H	30.0	30.5	30.8	31.3	32.1	32.4	32.9	33.2	33.7	34.5
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.2					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.4					+ 0.2 / - 0.4				

CIE Pub.117, 1617 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.7)
 Area: 0.01 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.17V I:0.1025A P:21.208W PF:0.9397 Freq:50.00Hz Lamp Flux:1616.73x1 lm		
NAME: SB-C01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*12mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	51	39	32	49	38	31	47	37	31	24
0.80	60	47	40	58	47	39	55	45	38	31
1.00	67	55	47	65	54	47	62	54	45	37
1.25	74	62	54	72	61	53	67	58	52	42
1.50	79	68	60	76	66	58	71	63	56	46
2.00	86	76	68	83	73	66	77	69	63	52
2.50	90	81	73	87	78	72	80	74	68	55
3.00	94	85	78	90	82	76	83	77	72	59
4.00	98	91	85	94	88	82	87	82	77	63
5.00	101	95	89	97	91	86	89	85	81	66
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.17V I:0.1025A P:21.208W PF:0.9397 Freq:50.00Hz Lamp Flux:1616.73x1 lm		
NAME: SB-C01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*12mm	

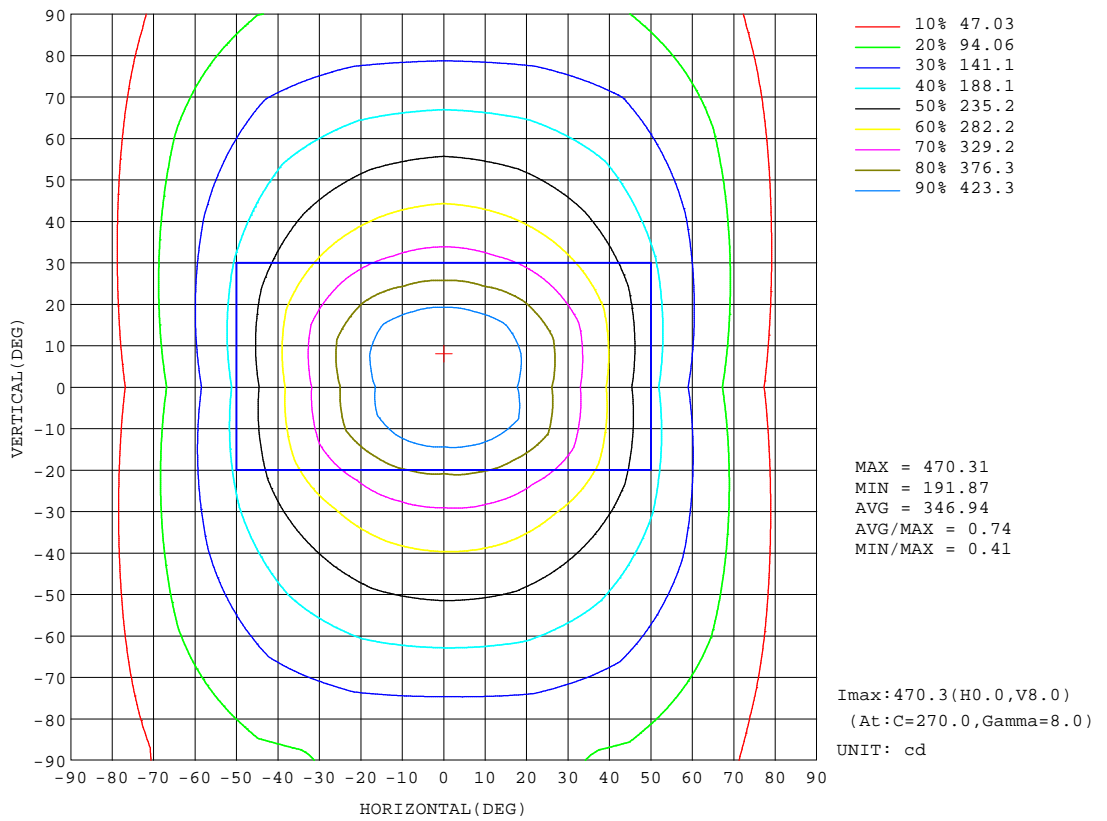


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.17V I:0.1025A P:21.208W PF:0.9397 Freq:50.00Hz Lamp Flux:1616.73x1 lm		
NAME: SB-C01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*12mm	

Flux out:661.1 lm

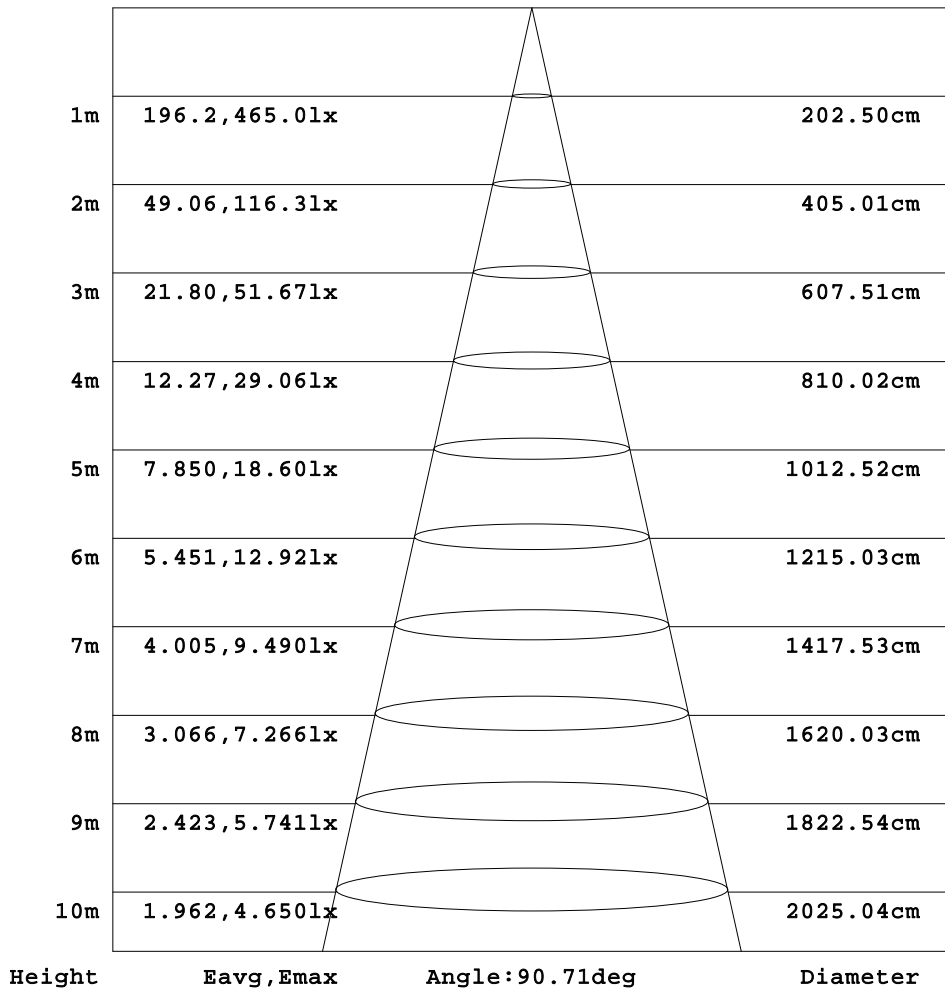


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: XIAOMI
 Test Date: 2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 9.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.17V I:0.1025A P:21.208W PF:0.9397 Freq:50.00Hz Lamp Flux:1616.73x1 lm		
NAME: SB-C01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*12mm	

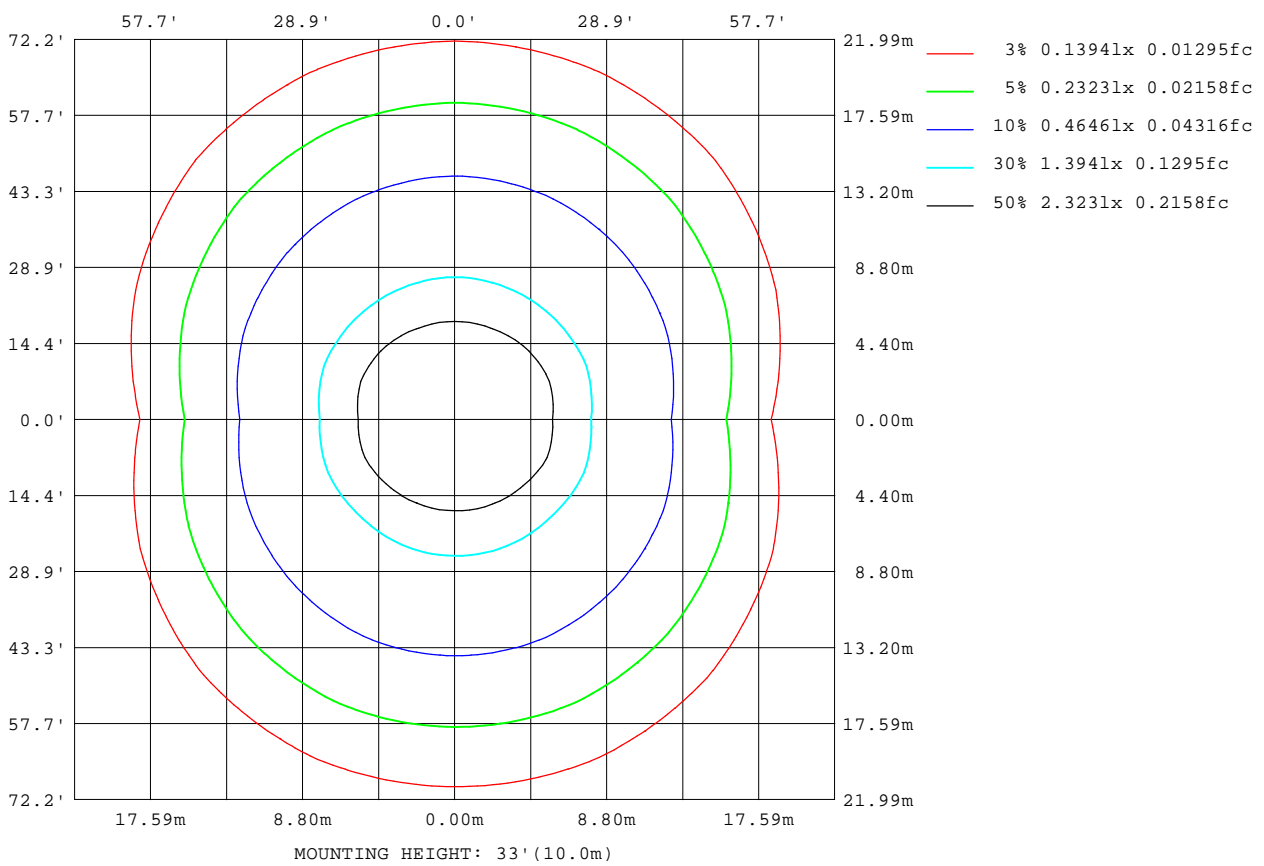

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

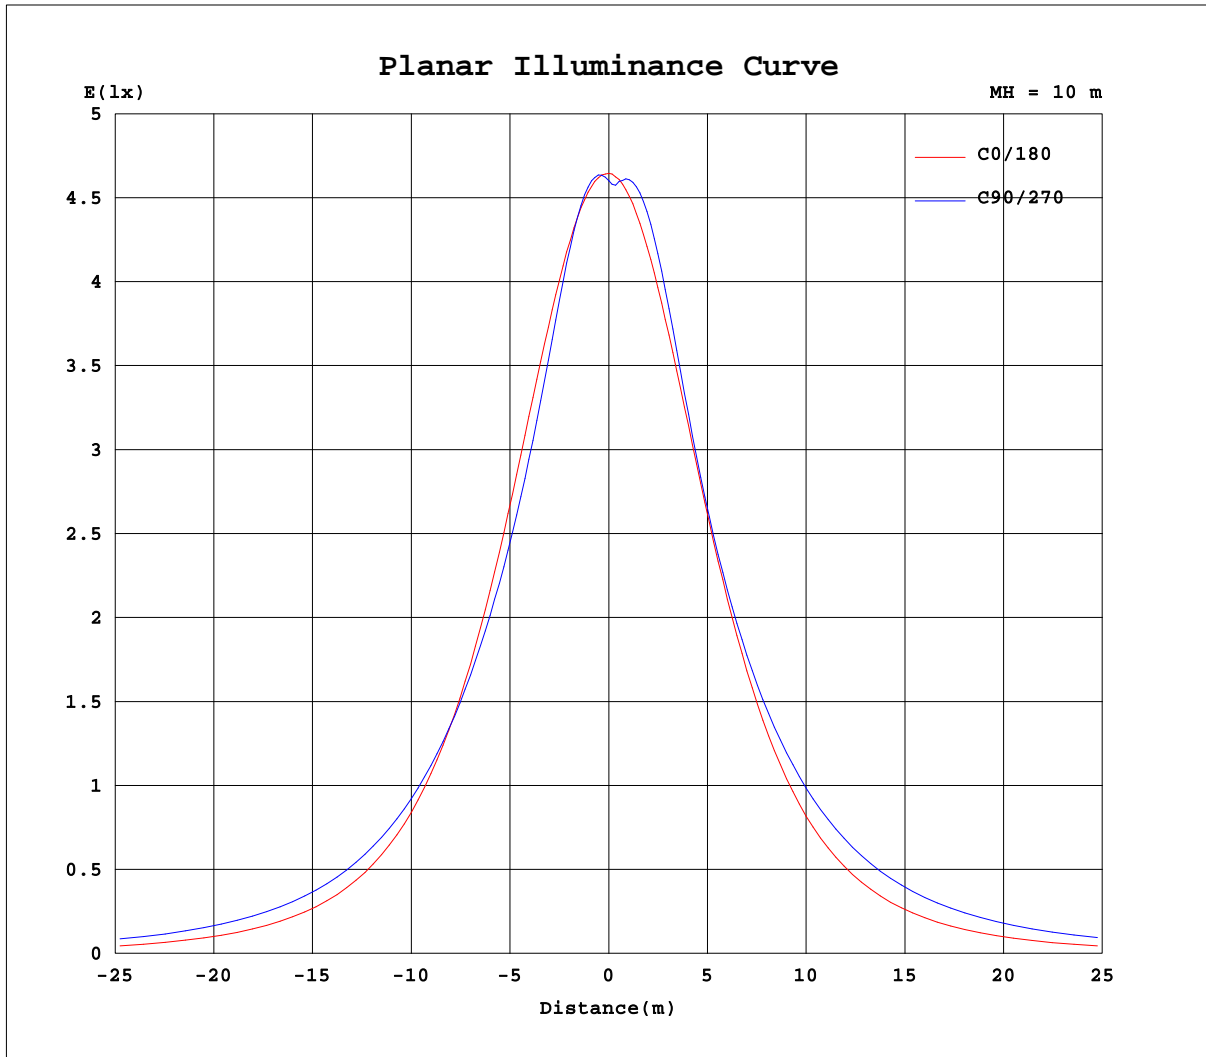

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: XIAOMI
Test Date: 2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.17V I:0.1025A P:21.208W PF:0.9397 Freq:50.00Hz Lamp Flux:1616.73x1 lm		
NAME: SB-C01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*12mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	465	464	463	461	460	459	458	458	465	464	463	461	460	459	458	458			
5	462	465	467	467	466	464	462	457	460	457	462	466	467	466	461	456			
10	453	459	458	455	451	452	452	449	448	451	463	467	469	468	463	453			
15	435	444	436	426	419	423	430	433	430	440	452	452	451	451	453	443			
20	412	421	405	390	383	387	399	410	406	421	429	420	418	420	430	424			
25	383	392	371	357	351	354	365	381	376	395	396	384	381	384	398	399			
30	350	359	338	329	325	326	332	348	343	364	361	351	350	351	362	368			
35	314	324	308	304	302	301	302	313	306	329	327	322	324	323	329	334			
40	276	290	281	282	281	279	275	279	269	294	296	297	300	298	298	299			
45	238	257	256	262	261	259	250	247	232	260	268	275	279	276	270	264			
50	201	226	233	241	241	238	228	217	196	228	243	254	258	255	246	232			
55	167	197	211	221	221	218	206	189	163	198	220	233	238	234	222	202			
60	135	171	190	201	200	198	186	164	132	171	199	212	217	213	201	175			
65	106	147	171	180	180	178	166	141	104	147	179	192	196	193	180	150			
70	80.1	125	151	161	159	159	148	120	78.5	125	160	172	175	173	161	128			
75	57.0	104	133	142	140	140	130	100	55.2	106	141	153	155	154	143	108			
80	36.3	85.8	116	124	122	123	113	82.5	34.7	87.6	124	135	136	135	125	89.8			
85	18.0	68.7	99.5	108	106	107	97.7	66.3	17.1	71.3	108	118	119	118	109	73.2			
90	3.92	55.6	89.9	98.5	97.9	97.7	88.3	53.9	4.02	57.1	93.4	103	104	103	94.0	58.7			
95	4.01	54.0	88.5	97.4	96.8	96.4	86.9	52.3	4.06	55.0	89.4	98.3	97.8	97.9	89.9	56.5			
100	4.31	46.2	85.8	97.0	97.0	96.2	84.2	44.6	4.22	40.8	81.0	89.0	95.8	94.5	80.1	44.2			
105	4.66	30.9	79.2	93.4	94.6	92.6	77.7	29.9	4.44	33.4	68.8	83.4	84.7	86.0	69.9	33.8			
110	4.99	35.6	61.2	70.4	87.2	66.5	60.5	34.7	4.75	35.7	60.4	54.6	82.1	59.6	60.5	35.9			
115	5.31	34.7	60.9	70.6	81.8	70.6	60.5	33.7	5.06	33.9	65.4	68.8	80.7	69.4	64.2	34.8			
120	5.60	32.3	56.0	65.1	77.1	64.8	53.7	31.0	5.31	31.1	56.4	66.3	78.6	67.2	56.1	32.5			
125	5.82	30.1	49.0	58.2	68.4	57.8	47.4	28.8	5.50	29.7	49.3	59.0	73.7	59.7	48.9	31.8			
130	5.90	26.6	45.9	57.7	65.5	57.7	45.0	25.3	5.70	26.4	46.5	58.2	66.6	58.9	46.8	26.9			
135	5.95	24.3	42.2	56.0	62.0	55.8	41.3	23.5	5.73	25.6	38.6	58.0	64.0	58.9	44.0	25.2			
140	6.01	22.3	38.2	53.3	57.3	53.0	37.6	19.8	5.44	21.7	37.8	56.0	60.2	56.9	40.6	24.7			
145	6.05	20.0	36.1	47.6	51.6	47.2	33.5	15.7	5.35	17.7	34.3	44.3	54.3	51.7	38.5	22.5			
150	6.00	19.0	32.8	41.4	45.2	41.2	26.4	13.5	5.26	14.8	27.4	44.2	44.6	45.6	35.8	21.1			
155	5.85	16.9	28.4	35.1	38.1	34.7	19.6	11.1	5.23	13.2	20.6	36.8	40.7	37.6	31.7	18.9			
160	5.87	13.7	23.8	28.4	30.7	23.8	14.7	9.88	5.43	12.6	15.6	24.0	33.6	32.0	26.3	17.1			
165	6.05	11.1	19.9	23.2	23.3	16.4	12.5	8.82	5.69	12.0	14.4	15.7	25.7	25.0	21.7	14.3			
170	6.16	8.29	13.4	16.9	17.8	10.6	10.2	7.18	5.93	10.7	13.8	12.5	21.5	20.4	17.3	11.4			
175	6.24	5.45	8.02	9.57	8.19	6.94	6.92	4.95	6.09	8.67	10.7	9.96	8.65	13.6	11.6	8.94			
180	6.29	6.22	6.22	6.01	4.85	6.06	5.97	6.20	6.31	6.20	6.24	5.97	4.87	6.01	6.06	6.16			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks: