
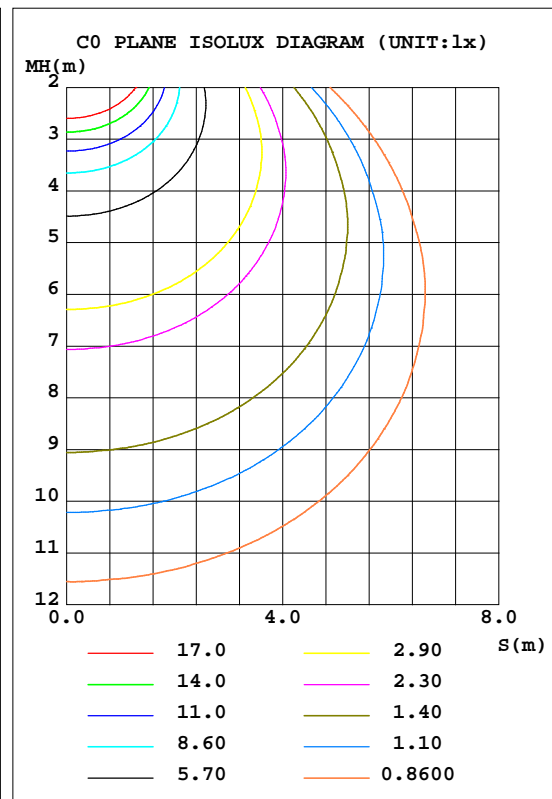


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.09V I:0.0999A P:20.601W PF:0.9367 Freq:50.00Hz Lamp Flux:1735.42x1 lm		
NAME: SB-F01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*75mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 84.24 lm/W			
MODEL		I _{max} (cd)	285.8	S/MH(C0/180)	1.49
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	2.37
RATED VOLTAGE(V)	--	TOTAL FLUX(lm)	1735.4	η UP, DN(C0-180)	22.0,27.2
NOMINAL FLUX(lm)	1735.42	CIE CLASS	DIFFUSE	η UP, DN(C180-360)	22.6,28.2
LAMPS INSIDE	1	η up(%)	44.6	CIBSE SHR NOM	1.75
TEST VOLTAGE(V)	--	η down(%)	55.4	CIBSE SHR MAX	1.75

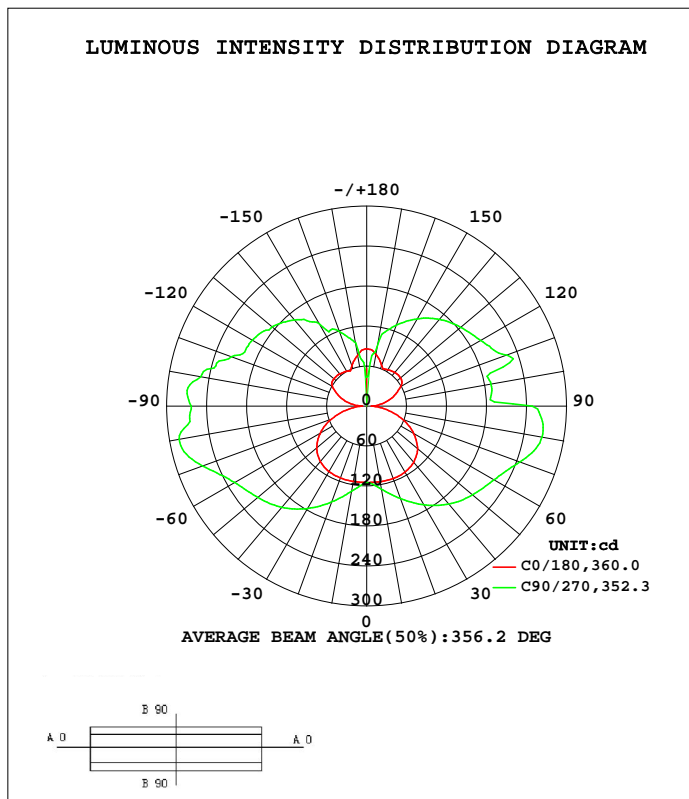

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	115.3	121.4	126.5	121.6	114.9	124.1	129.6	124.6	0- 10	11.37	11.37	0.66,0.66
20	115.9	134.2	147.6	134.3	115.0	137.8	152.7	139.0	10- 20	36.58	47.95	2.76,2.76
30	114.7	147.5	171.0	147.8	113.5	152.0	177.4	153.9	20- 30	65.65	113.6	6.55,6.55
40	109.9	158.4	192.0	158.6	108.4	162.3	198.3	165.5	30- 40	96.24	209.8	12.1,12.1
50	99.81	162.9	207.4	163.0	97.84	166.3	213.4	170.2	40- 50	123.8	333.6	19.2,19.2
60	81.29	160.8	221.1	161.2	80.16	164.2	229.4	169.1	50- 60	144.1	477.7	27.5,27.5
70	56.85	156.3	245.0	157.1	55.17	160.9	262.4	167.0	60- 70	158.0	635.7	36.6,36.6
80	29.41	149.5	267.3	150.4	27.93	153.1	285.8	160.1	70- 80	167.3	803.0	46.3,46.3
90	6.795	128.8	248.4	125.3	6.323	135.0	263.5	141.0	80- 90	157.9	960.9	55.4,55.4
100	24.81	100.9	189.5	98.25	26.06	136.2	253.2	143.7	90-100	135.5	1096	63.2,63.2
110	42.97	142.6	224.3	143.4	44.27	128.7	216.3	122.1	100-110	136.0	1232	71,71
120	59.16	136.4	197.6	133.0	59.55	136.8	198.1	140.6	110-120	131.4	1364	78.6,78.6
130	66.34	135.3	184.1	134.9	64.22	131.5	185.3	135.2	120-130	118.4	1482	85.4,85.4
140	66.05	134.1	170.0	133.5	63.29	117.9	168.9	126.8	130-140	99.25	1581	91.1,91.1
150	63.34	129.2	151.2	104.1	60.49	93.92	143.5	116.3	140-150	73.79	1655	95.4,95.4
160	65.87	118.8	128.9	73.03	65.08	66.05	119.0	107.6	150-160	47.16	1702	98.1,98.1
170	79.38	101.5	89.75	73.64	77.96	71.25	96.16	95.94	160-170	25.31	1728	99.6,99.6
180	86.12	85.61	43.92	81.26	85.95	85.59	43.94	81.47	170-180	7.694	1735	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

Conical surface Flux(90deg): 268.69 lm

%lum = 15.5%
%lamp = 15.5%

Conical surface Flux(120deg): 477.72 lm


%lum = 27.5%
%lamp = 27.5%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XIAOMI
Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.09V I:0.0999A P:20.601W PF:0.9367 Freq:50.00Hz Lamp Flux:1735.42x1 lm		
NAME: SB-F01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*75mm	

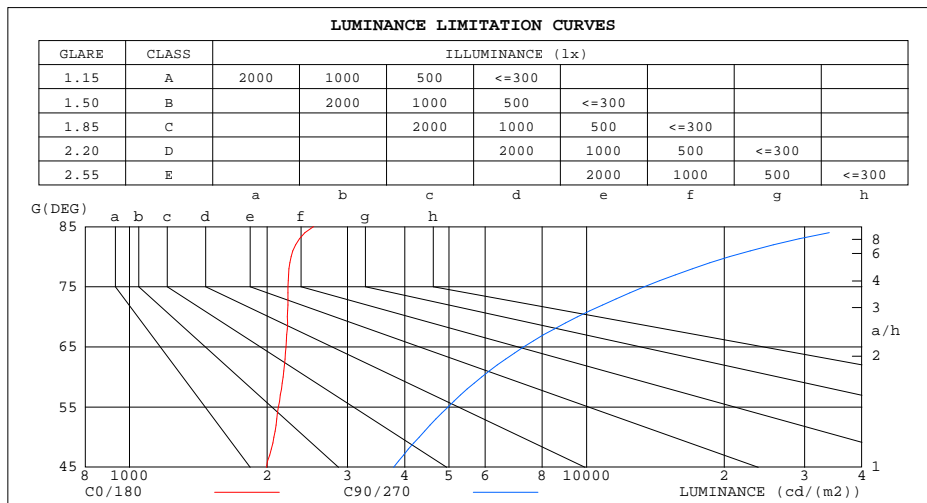

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	2526	40481
80	2258	20527
75	2224	13378
70	2216	9550
65	2200	7285
60	2168	5895
55	2116	4972
50	2070	4302
45	1995	3780


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.09V I:0.0999A P:20.601W PF:0.9367 Freq:50.00Hz Lamp Flux:1735.42x1 lm		
NAME: SB-F01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*75mm	

ρ _{cc}	80%			70%			50%			30%			10%			0
ρ _w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ _{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.08	1.08	1.08	1.01	1.01	1.01	.86	.86	.86	.73	.73	.73	.61	.61	.61	.55
1.0	.88	.82	.77	.81	.76	.72	.69	.65	.61	.57	.54	.52	.47	.44	.42	.37
2.0	.74	.66	.59	.69	.61	.55	.58	.52	.47	.48	.43	.40	.38	.35	.32	.28
3.0	.64	.55	.47	.59	.51	.44	.49	.43	.38	.41	.36	.31	.33	.29	.25	.21
4.0	.56	.46	.39	.51	.43	.36	.43	.36	.31	.35	.30	.26	.28	.24	.21	.17
5.0	.49	.39	.32	.45	.37	.30	.38	.31	.26	.31	.26	.21	.25	.21	.17	.14
6.0	.43	.34	.28	.40	.32	.26	.34	.27	.22	.28	.22	.18	.22	.18	.15	.12
7.0	.39	.30	.24	.36	.28	.22	.30	.24	.19	.25	.20	.16	.20	.16	.13	.10
8.0	.35	.26	.21	.32	.25	.19	.27	.21	.16	.23	.18	.14	.18	.14	.11	.09
9.0	.32	.24	.18	.30	.22	.17	.25	.19	.14	.21	.16	.12	.17	.13	.10	.07
10.0	.29	.21	.16	.27	.20	.15	.23	.17	.13	.19	.14	.11	.16	.12	.09	.07

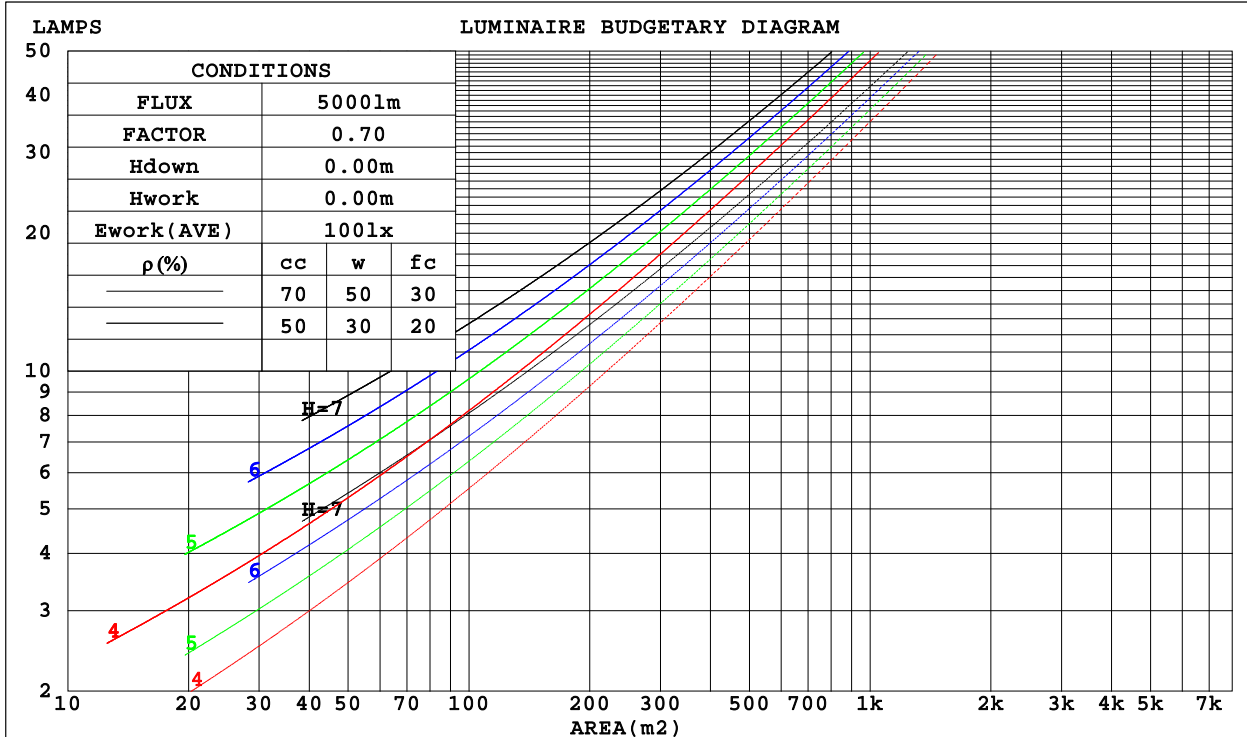

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.09V I:0.0999A P:20.601W PF:0.9367 Freq:50.00Hz Lamp Flux:1735.42x1 lm		
NAME: SB-F01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*75mm	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.408	.232	.073	.387	.221	.070	.348	.200	.064	.312	.180	.058	.279	.162	.052	
2.0	.343	.188	.058	.324	.178	.055	.288	.160	.050	.256	.143	.045	.225	.127	.040	
3.0	.300	.160	.048	.283	.151	.046	.250	.136	.041	.220	.121	.037	.192	.106	.033	
4.0	.267	.139	.041	.252	.132	.039	.222	.118	.035	.194	.104	.031	.168	.091	.028	
5.0	.242	.123	.036	.227	.117	.034	.200	.104	.031	.174	.092	.027	.150	.080	.024	
6.0	.220	.110	.032	.207	.105	.030	.182	.093	.027	.158	.082	.024	.136	.072	.021	
7.0	.202	.100	.028	.190	.095	.027	.167	.084	.024	.145	.074	.022	.124	.065	.019	
8.0	.187	.091	.026	.176	.087	.024	.154	.077	.022	.134	.068	.020	.115	.059	.017	
9.0	.174	.084	.023	.163	.080	.022	.143	.071	.020	.124	.062	.018	.106	.054	.016	
10.0	.162	.078	.022	.153	.074	.021	.134	.066	.018	.116	.058	.016	.099	.050	.014	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.531	.531	.531	.453	.453	.453	.309	.309	.309	.178	.178	.178	.057	.057	.057	
1.0	.530	.498	.469	.453	.428	.404	.310	.294	.279	.179	.170	.163	.057	.055	.053	
2.0	.524	.477	.437	.449	.410	.378	.308	.284	.263	.177	.165	.154	.057	.053	.050	
3.0	.517	.462	.417	.443	.398	.362	.304	.277	.254	.176	.162	.149	.057	.052	.049	
4.0	.510	.450	.404	.438	.389	.351	.301	.271	.247	.174	.159	.146	.056	.052	.048	
5.0	.502	.441	.395	.432	.381	.344	.297	.266	.243	.172	.156	.144	.055	.051	.047	
6.0	.495	.433	.389	.426	.375	.339	.294	.263	.240	.170	.155	.142	.055	.051	.047	
7.0	.488	.427	.384	.420	.370	.335	.290	.260	.237	.169	.153	.141	.054	.050	.047	
8.0	.482	.422	.381	.415	.366	.332	.287	.257	.236	.167	.152	.140	.054	.050	.046	
9.0	.476	.418	.378	.410	.362	.330	.284	.255	.234	.165	.150	.140	.054	.049	.046	
10.0	.470	.414	.376	.405	.359	.328	.281	.253	.233	.164	.149	.139	.053	.049	.046	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.09V I:0.0999A P:20.601W PF:0.9367 Freq:50.00Hz Lamp Flux:1735.42x1 lm										
NAME: SB-F01-20WSZ					TYPE:			WEIGHT:		
SPEC.:4000K					DIM.:			SERIAL No.:		
MFR.: SNOWBALL					SUR.:1000*75mm					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	12.3	13.4	13.1	14.3	15.3	16.4	17.5	17.2	18.4	19.4
3H	14.1	15.1	14.9	16.0	17.1	20.1	21.1	20.9	22.0	23.1
4H	14.9	15.9	15.8	16.8	17.9	22.3	23.2	23.1	24.1	25.2
6H	15.6	16.5	16.4	17.4	18.5	24.6	25.6	25.5	26.5	27.6
8H	15.8	16.7	16.7	17.6	18.8	25.9	26.8	26.8	27.7	28.9
12H	16.0	16.9	16.9	17.8	19.0	27.3	28.2	28.2	29.1	30.3
4H 2H	14.2	15.2	15.1	16.1	17.2	16.9	17.9	17.7	18.8	19.9
3H	16.3	17.1	17.1	18.0	19.2	20.8	21.7	21.7	22.6	23.8
4H	17.2	18.0	18.1	18.9	20.1	23.2	24.0	24.1	24.9	26.1
6H	18.0	18.7	18.9	19.7	20.9	25.8	26.5	26.7	27.5	28.7
8H	18.4	19.0	19.3	20.0	21.2	27.2	27.9	28.1	28.8	30.0
12H	18.6	19.2	19.6	20.2	21.4	28.8	29.4	29.7	30.3	31.6
8H 4H	19.1	19.8	20.1	20.7	21.9	23.5	24.1	24.4	25.1	26.3
6H	20.3	20.9	21.3	21.8	23.1	26.4	27.0	27.4	27.9	29.2
8H	20.8	21.3	21.8	22.3	23.6	28.0	28.5	29.0	29.5	30.8
12H	21.3	21.7	22.3	22.7	24.0	29.9	30.3	30.8	31.3	32.6
12H 4H	19.9	20.5	20.8	21.4	22.7	23.5	24.1	24.4	25.0	26.3
6H	21.4	21.9	22.3	22.8	24.1	26.5	27.0	27.4	28.0	29.2
8H	22.1	22.5	23.1	23.5	24.8	28.2	28.7	29.2	29.6	30.9
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4				

CIE Pub.117, 1735 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = 1.9)
 Area: 0.075 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.09V I:0.0999A P:20.601W PF:0.9367 Freq:50.00Hz Lamp Flux:1735.42x1 lm		
NAME: SB-F01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*75mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	38	25	18	36	24	17	32	22	16	9
0.80	46	33	24	44	31	23	39	28	21	12
1.00	54	40	31	50	38	29	44	36	27	15
1.25	60	47	37	57	44	35	49	39	32	19
1.50	66	52	43	61	49	41	53	43	36	21
2.00	73	61	52	68	57	49	59	50	43	26
2.50	78	67	58	73	63	55	63	55	48	29
3.00	82	72	63	77	67	60	66	58	52	32
4.00	88	79	71	81	73	67	70	63	58	35
5.00	91	83	76	84	77	71	72	67	62	38
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.09V I:0.0999A P:20.601W PF:0.9367 Freq:50.00Hz Lamp Flux:1735.42x1 lm		
NAME: SB-F01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*75mm	

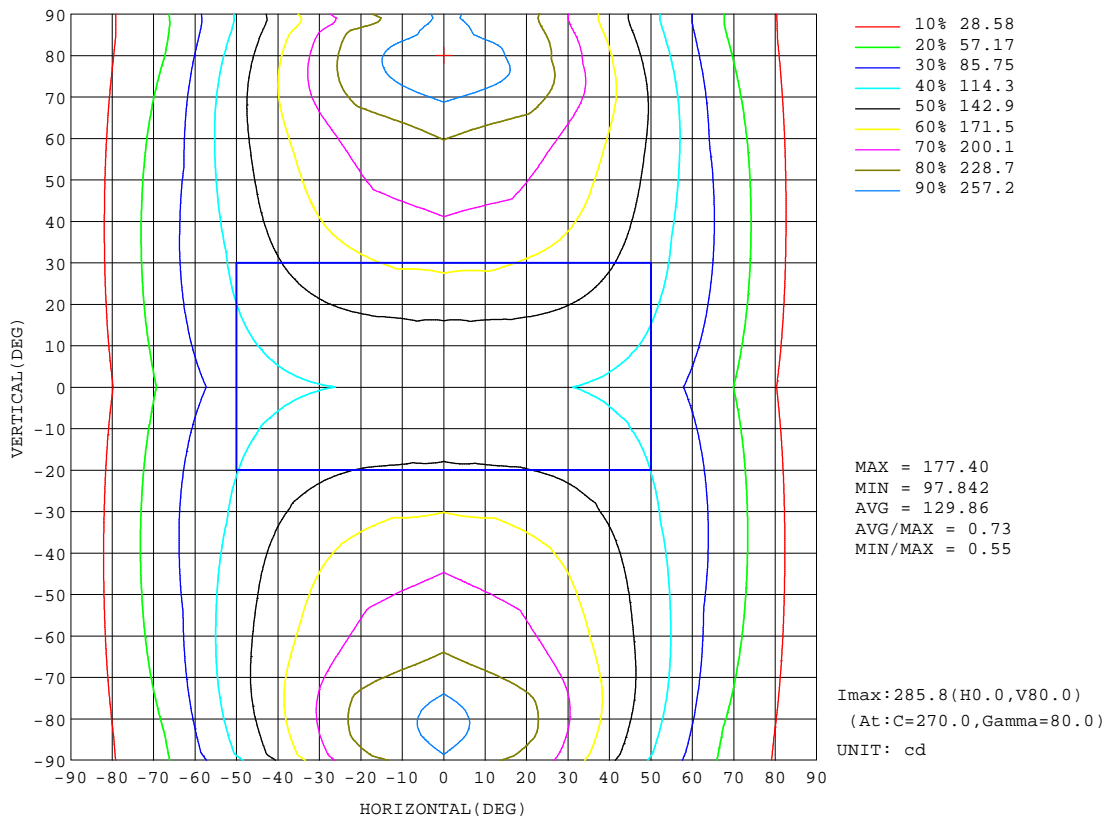


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: XIAOMI
 Test Date: 2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 9.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.09V I:0.0999A P:20.601W PF:0.9367 Freq:50.00Hz Lamp Flux:1735.42x1 lm		
NAME: SB-F01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*75mm	

Flux out:635.7 lm

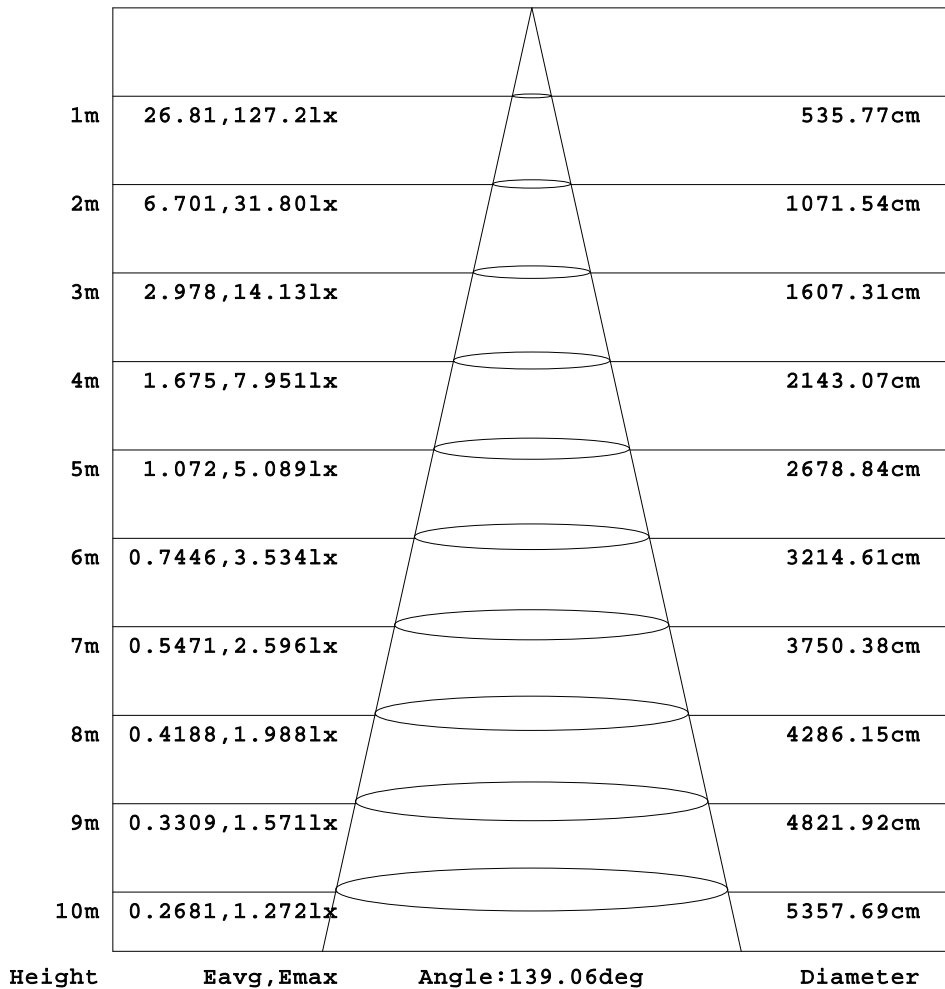


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.09V I:0.0999A P:20.601W PF:0.9367 Freq:50.00Hz Lamp Flux:1735.42x1 lm		
NAME: SB-F01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*75mm	

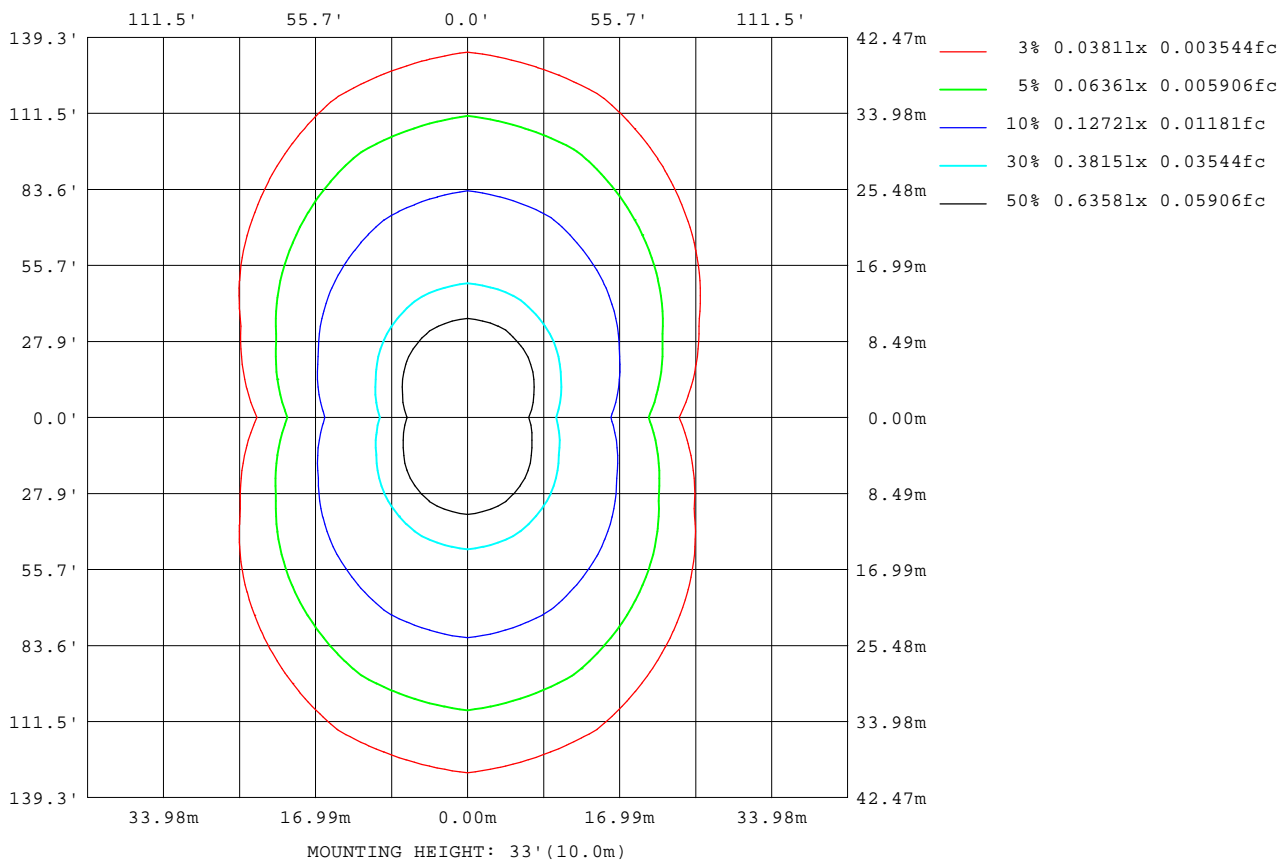

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

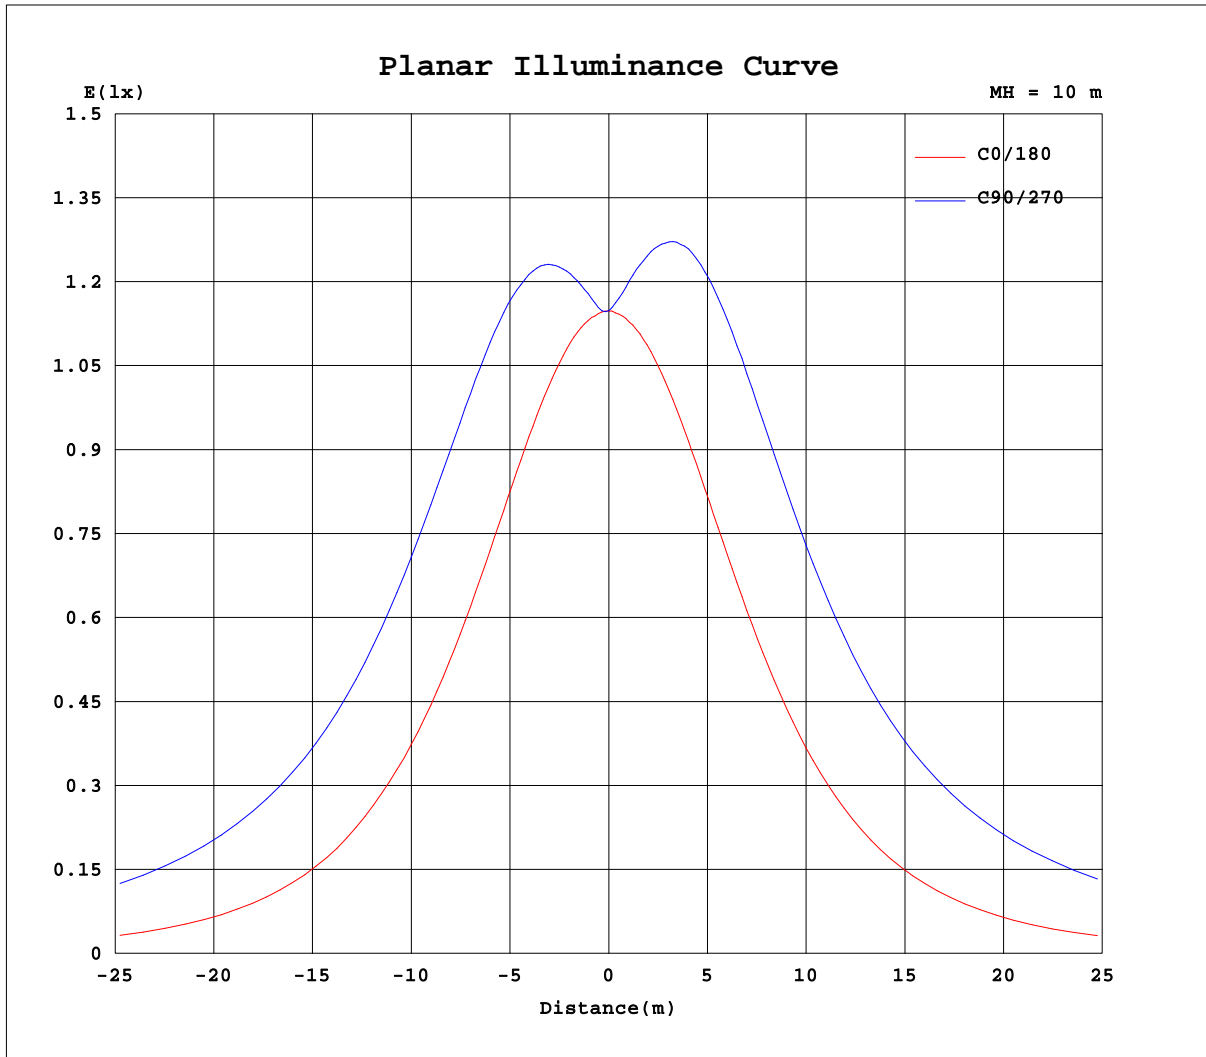

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: XIAOMI
 Test Date: 2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 9.000m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.09V I:0.0999A P:20.601W PF:0.9367 Freq:50.00Hz Lamp Flux:1735.42x1 lm		
NAME: SB-F01-20WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:1000*75mm	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	115	115	115	115	115	115	115	115	115	115	115	115	115	115	115	115			
5	115	115	117	118	118	118	117	115	115	117	119	120	120	120	119	117			
10	115	117	121	124	126	125	122	117	115	119	124	128	130	129	125	120			
15	116	120	128	133	136	134	128	119	115	122	131	138	141	138	131	123			
20	116	122	134	143	148	144	134	122	115	125	138	149	153	150	139	126			
25	116	125	141	154	159	154	141	125	114	127	145	160	165	161	147	129			
30	115	127	147	164	171	165	148	127	113	129	152	171	177	172	154	132			
35	113	129	154	174	182	174	154	128	112	131	158	180	188	182	160	134			
40	110	129	158	182	192	183	159	128	108	130	162	188	198	190	166	134			
45	106	128	162	190	200	190	162	128	104	129	165	195	206	197	169	133			
50	99.8	124	163	195	207	195	163	124	97.8	125	166	200	213	203	170	130			
55	91.0	119	162	199	214	200	163	119	89.9	120	166	205	221	208	170	125			
60	81.3	113	161	204	221	204	161	113	80.2	113	164	210	229	213	169	118			
65	69.7	104	158	209	231	210	159	105	68.8	104	162	218	243	222	168	110			
70	56.8	94.5	156	218	245	219	157	95.2	55.2	94.5	161	231	262	235	167	100			
75	43.2	84.0	154	227	260	228	155	84.7	41.4	83.8	159	241	280	247	166	90.0			
80	29.4	72.8	149	231	267	232	150	73.7	27.9	72.0	153	243	286	243	160	78.4			
85	16.5	61.7	142	228	265	228	142	62.5	15.3	60.0	143	235	266	239	150	66.0			
90	6.80	51.8	129	216	248	215	125	52.6	6.32	52.5	135	218	264	231	141	57.6			
95	15.0	59.5	96.1	157	188	159	96.4	61.4	16.3	59.5	128	223	271	236	147	61.9			
100	24.8	70.7	101	160	190	161	98.3	72.4	26.1	65.5	136	211	253	218	144	67.2			
105	34.1	80.4	142	174	192	175	143	82.2	35.5	68.6	129	197	234	214	130	74.5			
110	43.0	89.2	143	180	224	179	143	90.9	44.3	81.0	129	136	216	141	122	86.8			
115	50.9	96.8	143	175	206	175	144	98.7	52.3	88.2	139	169	200	162	145	93.3			
120	59.2	103	136	170	198	170	133	105	59.5	94.2	137	167	198	170	141	98.9			
125	64.6	107	130	166	191	165	128	107	63.6	93.4	132	165	193	168	136	98.9			
130	66.3	103	135	164	184	164	135	103	64.2	89.1	131	164	185	167	135	93.4			
135	66.7	104	136	165	178	165	136	104	64.2	90.9	125	161	178	163	132	91.7			
140	66.1	104	134	160	170	160	134	94.2	63.3	83.4	118	153	169	156	127	92.3			
145	65.0	102	132	154	161	154	121	84.0	61.9	74.3	109	141	157	147	123	93.6			
150	63.3	103	129	145	151	145	104	75.2	60.5	68.1	93.9	129	144	135	116	92.6			
155	61.7	99.5	123	136	140	130	87.5	66.9	58.7	62.9	78.7	119	127	119	113	93.0			
160	65.9	95.2	119	127	129	101	73.0	67.2	65.1	66.2	66.1	95.1	119	115	108	92.9			
165	73.2	92.9	112	117	117	76.4	69.1	74.0	72.0	72.1	63.9	70.8	107	109	103	89.3			
170	79.4	89.7	102	107	89.7	57.1	73.6	77.1	78.0	77.2	71.3	54.7	96.2	99.9	95.9	85.4			
175	85.0	88.4	93.7	96.6	65.1	63.0	78.4	80.7	84.4	82.7	77.8	57.4	67.8	87.3	85.1	82.8			
180	86.1	86.2	85.6	78.1	43.9	78.2	81.3	81.4	85.9	86.3	85.6	78.1	43.9	78.0	81.5	81.4			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-05

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks: