
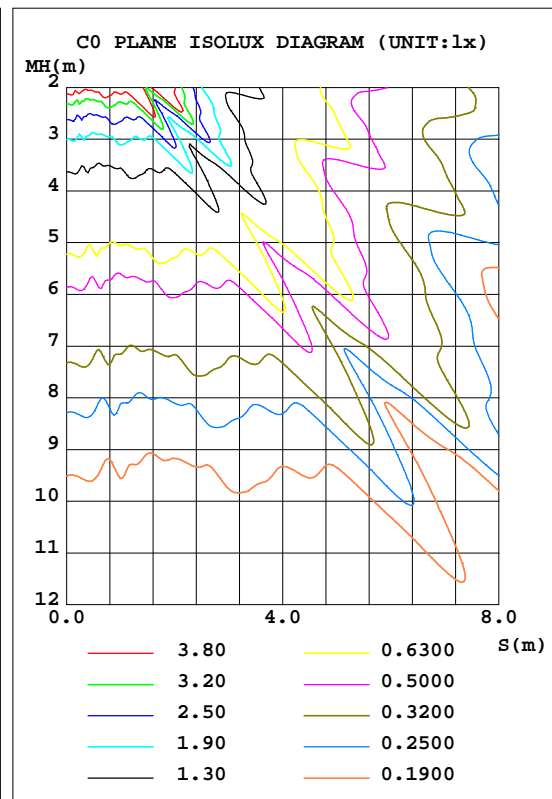


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.20V I:0.0569A P:6.6184W PF:0.5279 Freq:50.00Hz Lamp Flux:295.48x1 lm		
NAME: SB-M01A06WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 44.65 lm/W			
MODEL		I _{max} (cd)	112.8	S/MH(C0/180)	3.55
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.86
RATED VOLTAGE(V)	--	TOTAL FLUX(lm)	295.48	η UP, DN(C0-180)	15.5, 34.0
NOMINAL FLUX(lm)	295.48	CIE CLASS	SEMI-D.	η UP, DN(C180-360)	11.6, 38.9
LAMPS INSIDE	1	η up(%)	27.1	CIBSE SHR NOM	0.75
TEST VOLTAGE(V)	--	η down(%)	72.9	CIBSE SHR MAX	0.95

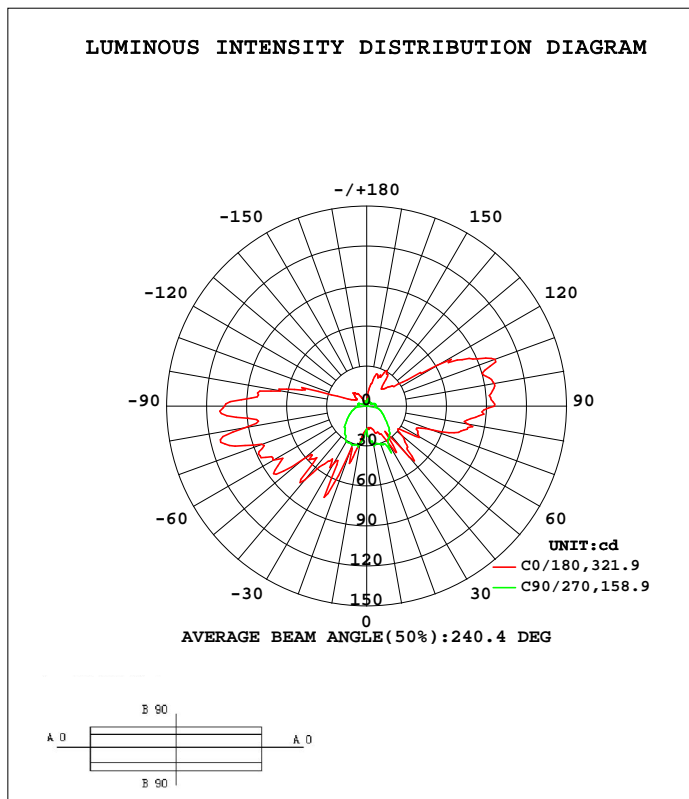

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	16.38	25.40	28.33	35.08	25.99	30.74	28.01	24.42	0- 10	2.225	2.225	0.75,0.75
20	21.44	28.46	30.97	53.91	33.11	43.21	31.17	31.03	10- 20	9.028	11.25	3.81,3.81
30	30.46	33.29	32.73	59.75	50.52	48.79	30.82	33.44	20- 30	17.56	28.81	9.75,9.75
40	49.63	43.36	27.34	41.57	72.51	33.86	25.72	45.46	30- 40	24.23	53.04	17.9,17.9
50	35.23	29.53	20.24	34.12	61.85	48.93	20.76	30.04	40- 50	31.15	84.18	28.5,28.5
60	45.12	27.04	14.94	36.25	81.26	37.60	16.07	27.60	50- 60	33.08	117.3	39.7,39.7
70	53.24	26.31	11.55	20.89	84.16	28.03	12.16	23.87	60- 70	36.62	153.9	52.1,52.1
80	76.76	16.61	8.112	15.25	91.66	16.49	8.787	17.27	70- 80	35.51	189.4	64.1,64.1
90	95.97	13.00	6.227	11.81	106.7	13.13	6.477	14.05	80- 90	26.11	215.5	72.9,72.9
100	97.33	10.44	6.576	9.446	65.91	10.50	6.851	12.13	90-100	22.85	238.4	80.7,80.7
110	102.6	9.677	5.881	8.254	18.49	8.592	6.338	10.56	100-110	17.94	256.3	86.7,86.7
120	61.45	9.502	3.816	7.669	9.615	7.498	3.355	9.152	110-120	12.96	269.2	91.1,91.1
130	23.12	8.988	3.816	6.992	11.69	6.573	1.962	7.326	120-130	8.252	277.5	93.9,93.9
140	17.26	8.289	3.531	4.745	12.44	4.746	2.825	8.549	130-140	6.181	283.7	96,96
150	30.67	10.09	3.092	2.317	6.654	2.586	2.505	9.165	140-150	5.497	289.2	97.9,97.9
160	24.64	13.79	3.605	1.519	3.464	2.179	2.887	13.72	150-160	3.642	292.8	99.1,99.1
170	15.52	11.00	5.436	2.857	2.954	2.988	1.956	9.539	160-170	2.270	295.1	99.9,99.9
180	1.145	0.4924	0.3854	0.4461	1.183	0.4991	0.3864	0.4384	170-180	0.3909	295.5	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

Conical surface Flux(90deg): 68.425 lm

%lum = 23.2%
%lamp = 23.2%

Conical surface Flux(120deg): 117.26 lm


%lum = 39.7%
%lamp = 39.7%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XIAOMI
Test Date:2023-05-24

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.20V I:0.0569A P:6.6184W PF:0.5279 Freq:50.00Hz Lamp Flux:295.48x1 lm		
NAME: SB-M01A06WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	

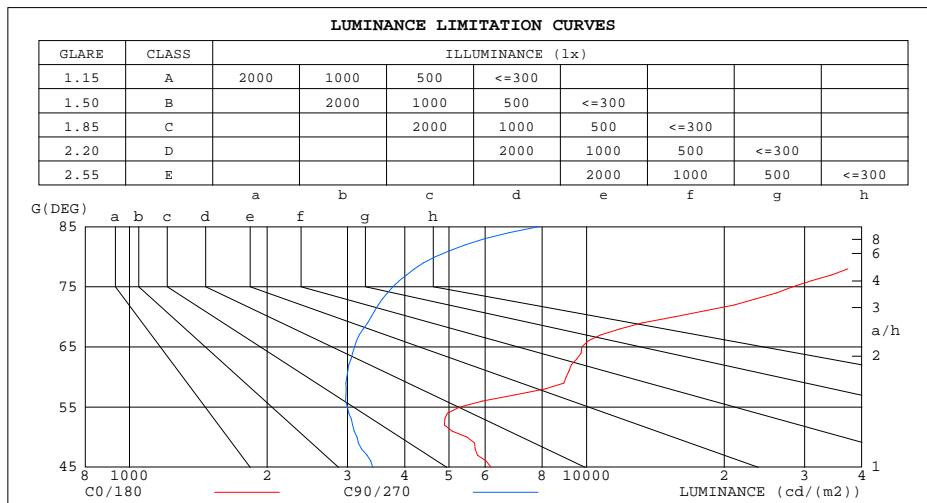

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	97097	7877
80	44206	4671
75	28242	3773
70	15565	3378
65	9760	3108
60	9024	2988
55	5273	2999
50	5481	3149
45	6175	3406


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.20V I:0.0569A P:6.6184W PF:0.5279 Freq:50.00Hz Lamp Flux:295.48x1 lm		
NAME: SB-M01A06WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.13	1.13	1.13	1.07	1.07	1.07	.96	.96	.96	.86	.86	.86	.77	.77	.77	.73
1.0	.92	.86	.80	.87	.81	.77	.77	.73	.69	.69	.65	.62	.61	.58	.56	.52
2.0	.77	.69	.61	.73	.65	.59	.65	.58	.53	.57	.52	.48	.50	.46	.43	.39
3.0	.66	.56	.49	.62	.53	.46	.55	.48	.42	.49	.43	.38	.43	.38	.34	.30
4.0	.57	.47	.40	.54	.45	.38	.48	.40	.34	.42	.36	.31	.37	.32	.28	.24
5.0	.50	.40	.33	.47	.38	.32	.42	.35	.29	.37	.31	.26	.33	.27	.23	.20
6.0	.45	.35	.28	.42	.33	.27	.38	.30	.24	.33	.27	.22	.29	.24	.20	.17
7.0	.40	.31	.24	.38	.29	.23	.34	.26	.21	.30	.24	.19	.26	.21	.17	.14
8.0	.36	.27	.21	.34	.26	.20	.31	.23	.18	.27	.21	.17	.24	.19	.15	.12
9.0	.33	.24	.18	.31	.23	.18	.28	.21	.16	.25	.19	.15	.22	.17	.13	.11
10.0	.30	.22	.16	.28	.21	.16	.26	.19	.14	.23	.17	.13	.20	.15	.12	.10

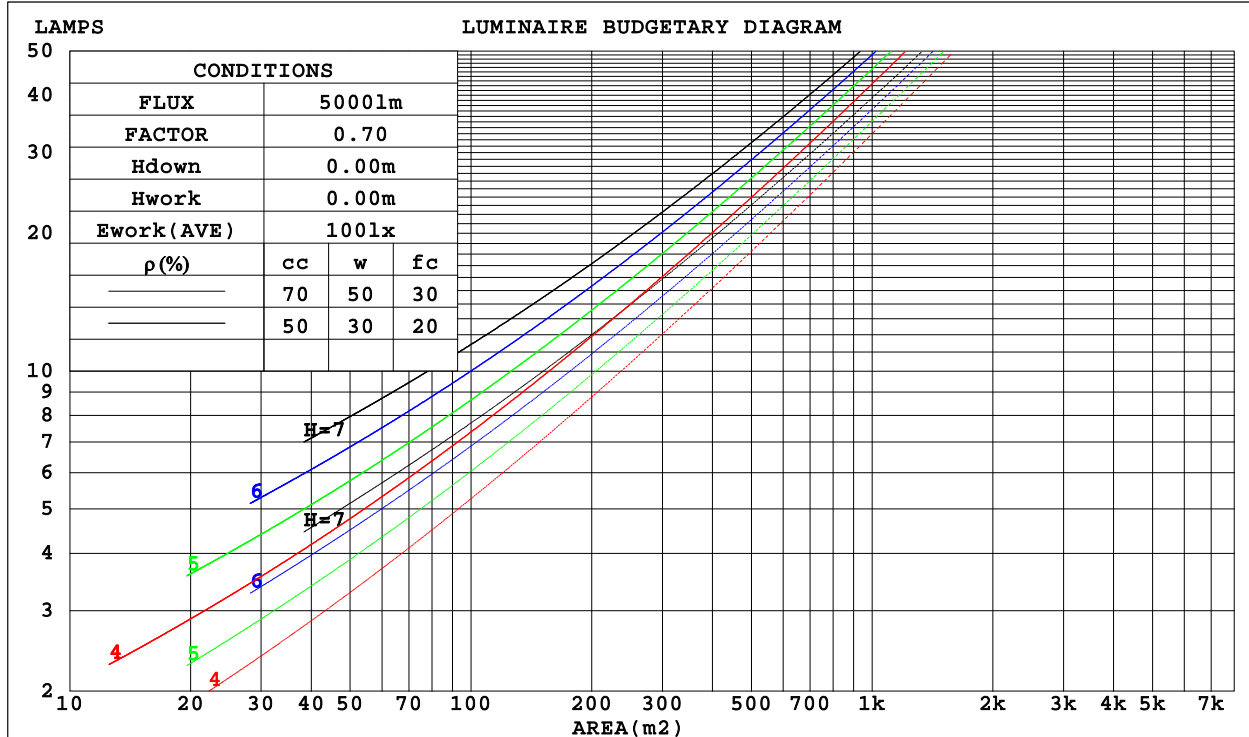

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.20V I:0.0569A P:6.6184W PF:0.5279 Freq:50.00Hz Lamp Flux:295.48x1 lm		
NAME: SB-M01A06WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.421	.239	.076	.405	.231	.073	.376	.216	.069	.349	.201	.065	.325	.188	.061	
2.0	.358	.196	.060	.344	.190	.058	.318	.177	.055	.293	.164	.051	.271	.153	.048	
3.0	.314	.167	.050	.302	.162	.049	.278	.150	.046	.255	.140	.043	.234	.130	.040	
4.0	.280	.146	.043	.269	.141	.042	.247	.131	.039	.226	.122	.037	.207	.113	.034	
5.0	.253	.129	.037	.242	.124	.036	.222	.116	.034	.204	.107	.032	.186	.099	.030	
6.0	.230	.116	.033	.221	.111	.032	.202	.104	.030	.185	.096	.028	.169	.089	.026	
7.0	.211	.105	.030	.203	.101	.029	.186	.094	.027	.170	.087	.025	.155	.081	.024	
8.0	.195	.095	.027	.187	.092	.026	.172	.086	.024	.157	.080	.023	.143	.073	.021	
9.0	.181	.088	.025	.174	.085	.024	.159	.079	.022	.146	.073	.021	.133	.068	.020	
10.0	.169	.081	.023	.162	.078	.022	.149	.073	.021	.136	.068	.019	.124	.063	.018	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.397	.397	.397	.339	.339	.339	.231	.231	.231	.133	.133	.133	.043	.043	.043	
1.0	.396	.363	.334	.339	.312	.287	.232	.214	.199	.133	.124	.115	.043	.040	.037	
2.0	.390	.341	.299	.334	.293	.259	.229	.203	.180	.132	.118	.106	.042	.038	.034	
3.0	.384	.325	.278	.329	.280	.241	.226	.195	.169	.130	.114	.100	.042	.037	.033	
4.0	.376	.313	.265	.323	.271	.230	.222	.189	.162	.128	.110	.096	.041	.036	.032	
5.0	.368	.304	.256	.316	.263	.223	.218	.184	.157	.126	.108	.093	.041	.035	.031	
6.0	.361	.296	.249	.310	.256	.217	.214	.179	.154	.124	.106	.091	.040	.035	.030	
7.0	.353	.290	.245	.304	.251	.213	.210	.176	.151	.122	.104	.090	.039	.034	.030	
8.0	.347	.284	.241	.298	.246	.210	.206	.173	.149	.120	.102	.089	.039	.033	.029	
9.0	.340	.279	.238	.293	.243	.208	.203	.170	.148	.118	.101	.088	.038	.033	.029	
10.0	.334	.275	.236	.288	.239	.206	.200	.168	.146	.117	.099	.087	.038	.033	.029	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.20V I:0.0569A P:6.6184W PF:0.5279 Freq:50.00Hz Lamp Flux:295.48x1 lm										
NAME: SB-M01A06WSZ					TYPE:			WEIGHT:		
SPEC.:4000K					DIM.:			SERIAL No.:		
MFR.: SNOWBALL					SUR.:					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	19.2	20.5	19.8	21.2	21.9	13.7	15.1	14.3	15.7	16.5
3H	23.0	24.2	23.7	24.9	25.7	15.5	16.8	16.2	17.4	18.2
4H	25.7	26.9	26.4	27.6	28.4	16.6	17.8	17.2	18.4	19.3
6H	28.5	29.6	29.1	30.3	31.1	17.6	18.7	18.3	19.4	20.3
8H	29.8	30.9	30.5	31.6	32.4	18.2	19.2	18.8	19.9	20.8
12H	31.6	32.6	32.3	33.3	34.2	18.7	19.8	19.4	20.5	21.3
4H 2H	19.6	20.8	20.3	21.5	22.3	15.9	17.1	16.6	17.8	18.6
3H	23.7	24.7	24.4	25.4	26.3	17.7	18.7	18.4	19.4	20.3
4H	26.3	27.3	27.1	28.0	28.9	18.8	19.7	19.5	20.5	21.4
6H	29.1	29.9	29.8	30.7	31.6	19.9	20.8	20.7	21.5	22.5
8H	30.5	31.3	31.3	32.1	33.0	20.4	21.2	21.2	22.0	23.0
12H	32.5	33.3	33.3	34.0	35.0	21.0	21.8	21.8	22.6	23.5
8H 4H	26.3	27.1	27.1	27.9	28.8	20.2	21.0	21.0	21.8	22.7
6H	29.1	29.8	29.9	30.6	31.6	21.5	22.2	22.3	23.0	24.0
8H	30.6	31.3	31.5	32.1	33.1	22.2	22.8	23.0	23.6	24.6
12H	32.9	33.4	33.7	34.2	35.2	22.9	23.4	23.7	24.3	25.3
12H 4H	26.3	27.0	27.0	27.8	28.8	20.6	21.4	21.4	22.1	23.1
6H	29.1	29.7	29.9	30.5	31.5	22.0	22.7	22.8	23.5	24.5
8H	30.6	31.2	31.5	32.0	33.0	22.8	23.3	23.6	24.2	25.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.2 / - 0.2					+ 0.1 / - 0.1				
1.5H	+ 0.2 / - 0.3					+ 0.3 / - 0.2				
2.0H	+ 0.4 / - 0.3					+ 0.3 / - 0.4				

CIE Pub.117, 295.5 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -4.2)
 Area: 0.01 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.20V I:0.0569A P:6.6184W PF:0.5279 Freq:50.00Hz Lamp Flux:295.48x1 lm		
NAME: SB-M01A06WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	41	28	21	40	28	21	38	27	20	13
0.80	50	36	28	48	35	27	45	34	26	18
1.00	58	44	35	55	42	34	51	42	32	22
1.25	65	51	42	62	49	40	57	46	38	27
1.50	70	57	47	67	55	46	61	51	43	31
2.00	78	66	56	74	63	54	67	58	51	37
2.50	83	71	63	79	68	60	71	63	56	41
3.00	87	77	68	83	73	66	75	67	61	45
4.00	92	83	76	88	79	73	79	72	67	50
5.00	96	88	81	91	84	78	82	76	71	53
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.20V I:0.0569A P:6.6184W PF:0.5279 Freq:50.00Hz Lamp Flux:295.48x1 lm		
NAME: SB-M01A06WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	

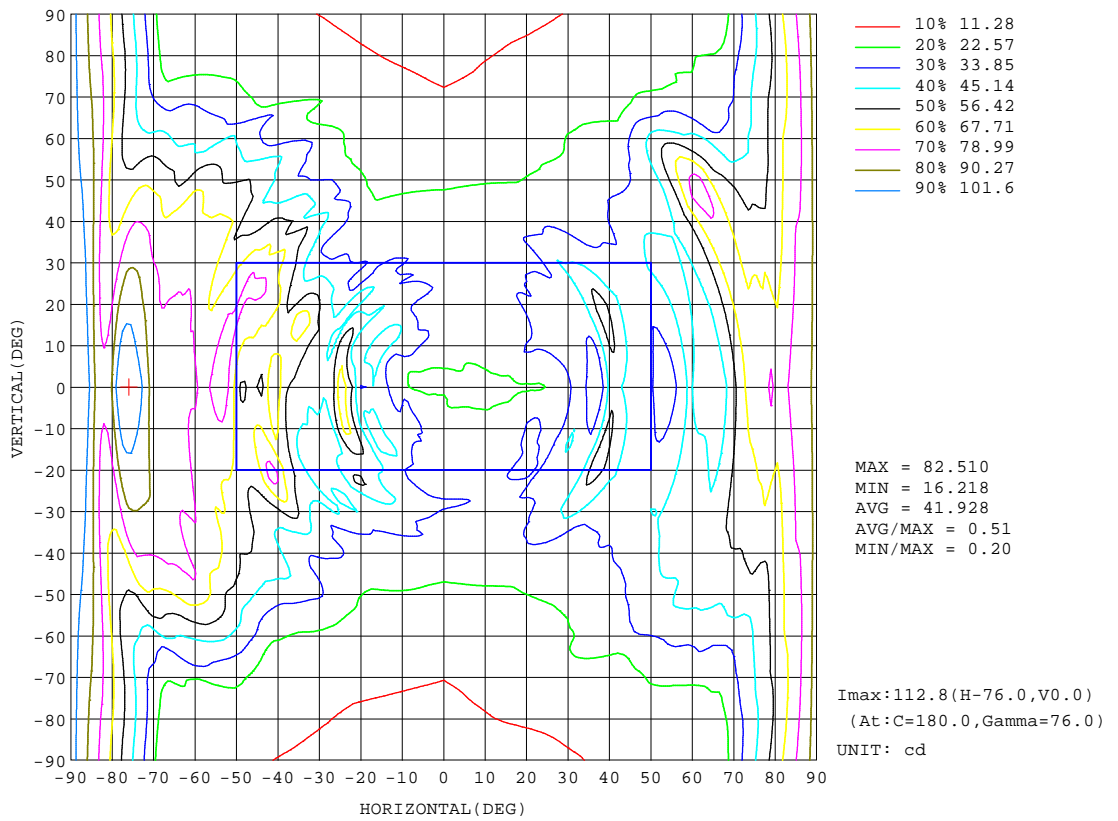


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.20V I:0.0569A P:6.6184W PF:0.5279 Freq:50.00Hz Lamp Flux:295.48x1 lm		
NAME: SB-M01A06WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	

Flux out:189.4 lm

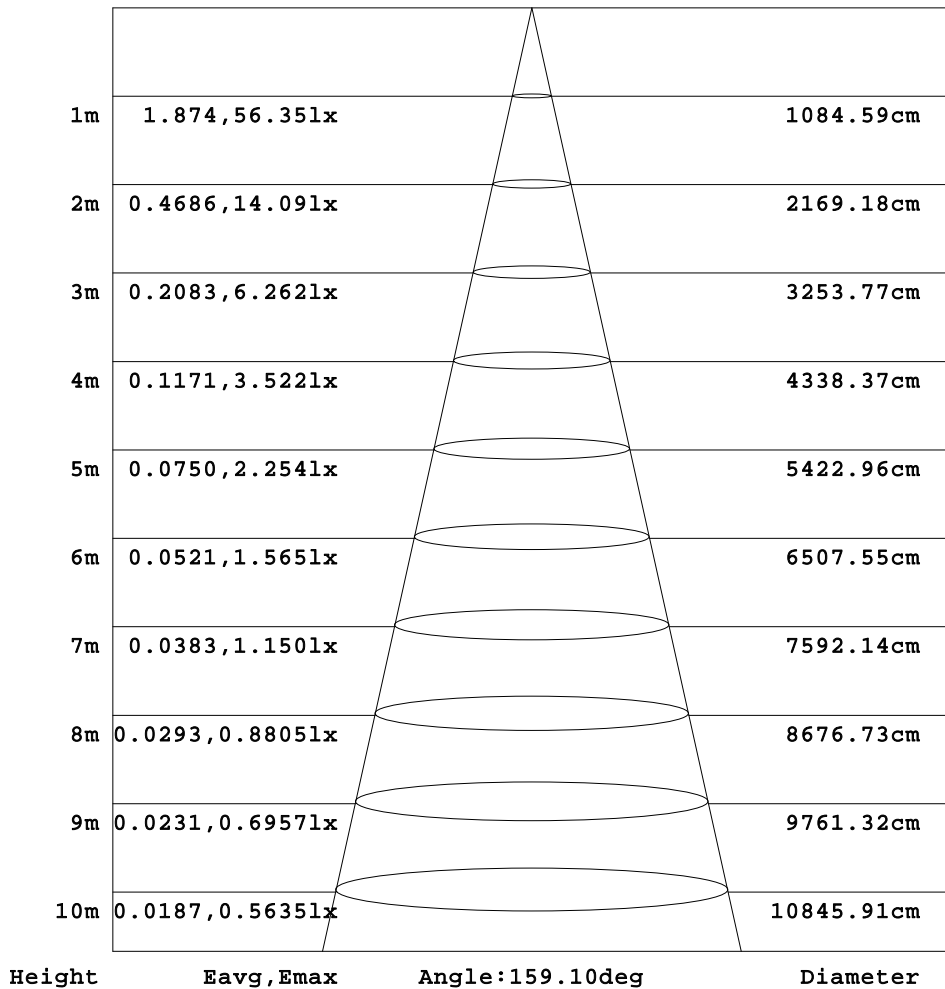


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.20V I:0.0569A P:6.6184W PF:0.5279 Freq:50.00Hz Lamp Flux:295.48x1 lm		
NAME: SB-M01A06WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	

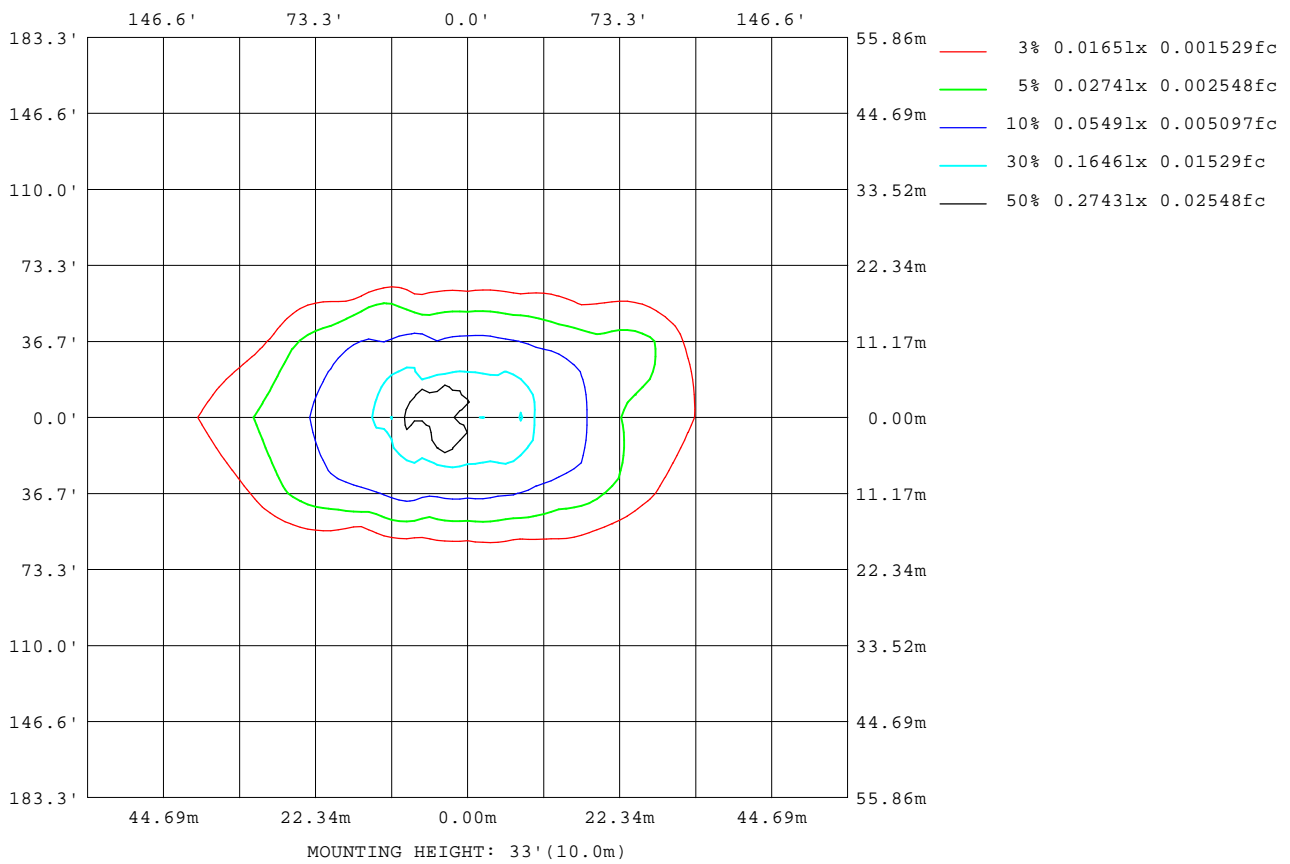

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

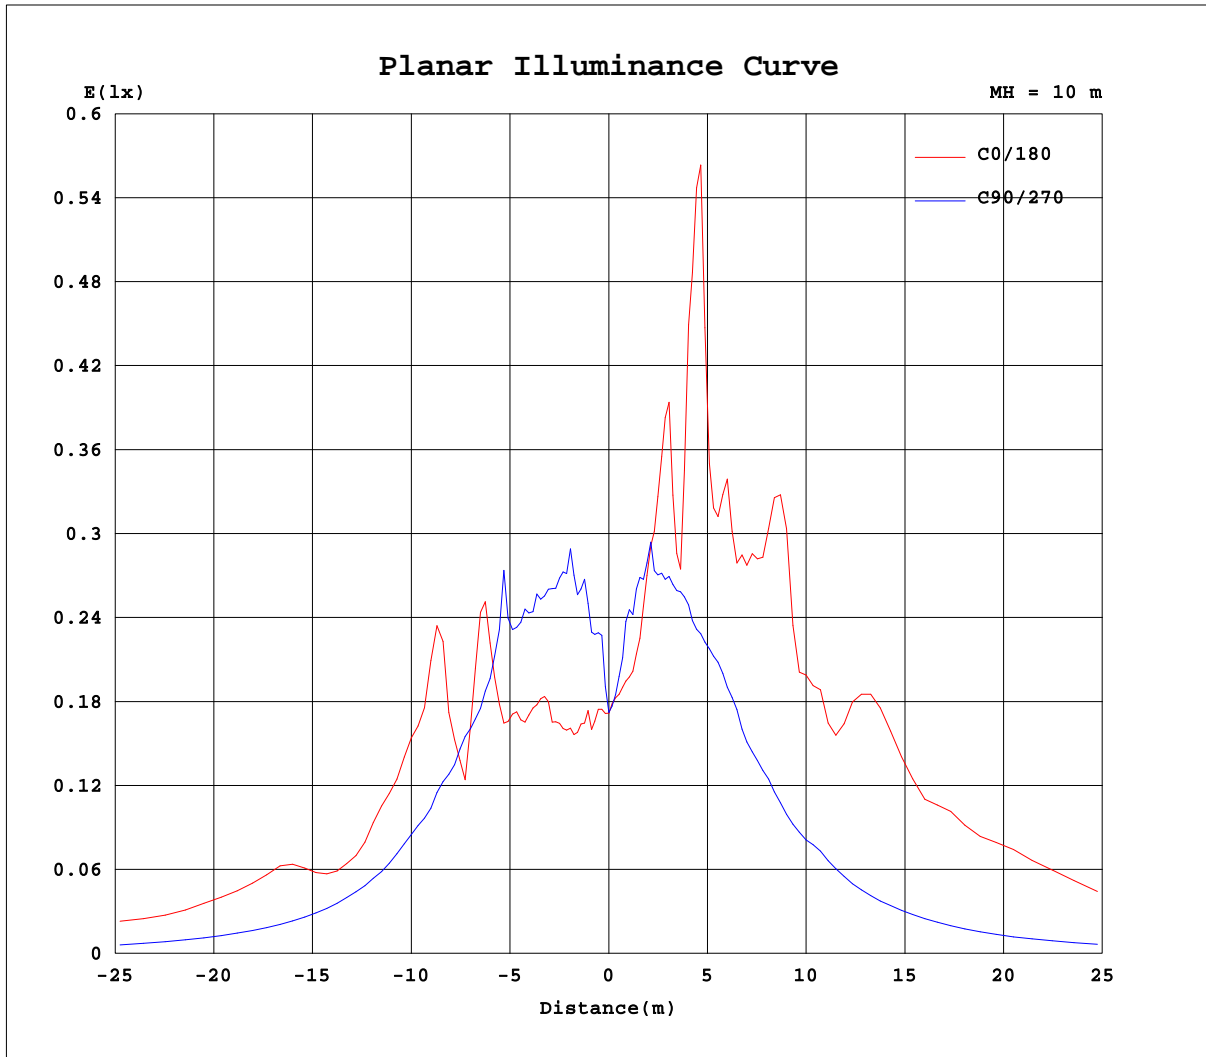

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: XIAOMI
Test Date: 2023-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.20V I:0.0569A P:6.6184W PF:0.5279 Freq:50.00Hz Lamp Flux:295.48x1 lm		
NAME: SB-M01A06WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	17.2	17.3	17.3	17.3	17.2	17.1	17.1	17.0	17.2	17.3	17.3	17.3	17.2	17.1	17.1	17.0			
5	16.2	19.5	21.7	22.1	23.2	24.1	27.7	23.7	19.7	18.6	20.5	22.6	24.0	23.6	22.2	18.3			
10	16.4	20.8	25.4	26.7	28.3	28.5	35.1	36.6	26.0	25.8	30.7	30.7	28.0	26.3	24.4	21.8			
15	18.4	25.0	25.8	27.3	29.0	33.0	36.4	38.5	39.4	34.4	39.6	33.3	30.2	26.8	26.1	27.7			
20	21.4	30.3	28.5	28.4	31.0	34.1	53.9	50.4	33.1	49.3	43.2	33.4	31.2	29.1	31.0	32.8			
25	23.2	35.0	33.7	30.1	31.3	35.2	50.5	70.4	75.7	59.8	42.9	38.5	30.7	29.9	31.6	35.1			
30	30.5	34.2	33.3	30.2	32.7	43.8	59.7	36.5	50.5	46.7	48.8	33.1	30.8	30.2	33.4	42.2			
35	29.7	39.6	34.7	30.1	29.3	38.3	45.9	41.1	50.5	65.7	37.7	30.7	27.5	29.8	34.8	41.6			
40	49.6	60.6	43.4	28.2	27.3	28.3	41.6	53.9	72.5	60.7	33.9	27.0	25.7	27.5	45.5	52.7			
45	43.7	46.5	31.9	25.6	24.1	27.9	38.1	83.5	56.3	73.2	41.7	24.0	23.0	26.1	38.8	46.9			
50	35.2	41.9	29.5	22.7	20.2	23.9	34.1	57.1	61.8	82.0	48.9	21.4	20.8	23.6	30.0	39.3			
55	30.2	43.4	28.9	20.1	17.2	19.2	42.8	62.0	84.3	69.1	49.2	19.4	18.2	20.8	29.7	45.1			
60	45.1	46.8	27.0	17.7	14.9	16.6	36.3	64.8	81.3	67.3	37.6	18.0	16.1	18.4	27.6	48.2			
65	41.2	51.6	27.5	16.1	13.1	15.5	25.2	76.5	88.2	69.1	42.5	16.2	14.0	17.0	28.9	48.5			
70	53.2	52.4	26.3	15.8	11.6	14.0	20.9	79.3	84.2	69.5	28.0	15.3	12.2	15.6	23.9	81.9			
75	73.1	43.3	18.8	15.6	9.77	12.1	17.5	57.3	110	50.3	19.2	14.0	10.4	14.1	19.2	54.8			
80	76.8	27.5	16.6	13.9	8.11	10.6	15.2	25.9	91.7	37.4	16.5	12.5	8.79	13.5	17.3	28.7			
85	84.6	21.2	14.2	10.7	6.87	9.62	13.4	17.1	98.3	18.5	14.5	11.3	7.49	11.8	15.6	25.3			
90	96.0	18.4	13.0	9.50	6.23	8.69	11.8	14.1	107	15.1	13.1	10.2	6.48	10.2	14.0	18.4			
95	92.3	16.5	11.4	8.34	6.70	7.66	10.1	12.2	82.4	13.2	11.7	9.29	6.60	9.21	12.8	16.1			
100	97.3	14.4	10.4	7.58	6.58	7.07	9.45	10.8	65.9	11.3	10.5	8.54	6.85	8.65	12.1	14.5			
105	90.9	13.1	10.1	7.16	6.33	6.67	8.80	9.88	47.8	10.3	9.55	7.98	6.76	8.37	11.2	13.1			
110	103	12.0	9.68	7.00	5.88	6.37	8.25	9.00	18.5	9.18	8.59	7.41	6.34	7.10	10.6	12.1			
115	84.9	14.5	9.98	6.62	4.32	6.13	7.98	7.87	11.5	8.51	7.88	6.74	2.82	5.44	10.0	11.3			
120	61.5	15.2	9.50	6.59	3.82	5.72	7.67	6.94	9.62	8.32	7.50	5.88	3.36	6.81	9.15	13.8			
125	28.9	14.9	9.10	6.06	3.84	5.17	7.48	6.56	8.79	8.14	7.10	4.95	2.62	5.45	8.24	13.8			
130	23.1	14.3	8.99	5.90	3.82	5.19	6.99	4.57	11.7	6.65	6.57	4.19	1.96	4.62	7.33	14.7			
135	18.6	12.5	9.04	5.61	3.72	4.81	6.39	4.87	13.8	9.68	6.08	3.49	2.39	5.38	9.84	11.5			
140	17.3	12.5	8.29	9.22	3.53	4.53	4.75	7.57	12.4	10.0	4.75	3.41	2.82	5.53	8.55	13.2			
145	27.3	23.7	10.2	8.14	3.33	4.12	3.08	6.02	11.2	11.2	3.79	3.35	2.76	6.43	8.29	16.2			
150	30.7	19.6	10.1	6.68	3.09	2.97	2.32	4.36	6.65	9.33	2.59	2.44	2.51	6.96	9.16	16.2			
155	24.0	19.2	12.7	6.72	3.58	2.05	1.72	3.72	4.09	6.07	1.94	1.47	2.17	4.96	12.3	12.1			
160	24.6	21.8	13.8	7.76	3.60	1.47	1.52	3.41	3.46	4.79	2.18	0.82	2.89	6.02	13.7	16.2			
165	22.8	21.3	14.8	7.07	4.53	2.13	2.30	3.33	3.04	3.85	2.99	1.03	3.53	6.84	12.9	20.5			
170	15.5	17.3	11.0	8.20	5.44	3.12	2.86	2.68	2.95	3.30	2.99	1.10	1.96	5.99	9.54	15.6			
175	5.70	5.67	5.60	4.67	0.63	0.38	0.41	1.17	1.46	1.40	0.39	0.37	0.84	1.48	2.40	5.00			
180	1.14	0.75	0.49	0.38	0.39	0.40	0.45	0.47	1.18	0.76	0.50	0.38	0.39	0.40	0.44	0.47			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-05-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks: