

## Malbun SB-M06A40W

### PRODUCT DESCRIPTION

**“MALBUN”** Capturing the ethereal beauty of a perfect raindrop. This stunning collection elevates this model which includes bright LED module installed inside the polished gold metal that radiates from the center of the 1.43 pounds luxuriously thick 1.0” diameter 6.0” crystal glow when illuminated. Available in 5-14 Lights or any number of Lights by your designs. custom color finishes and suspension cable lengths are available. 3000K/3500K/4000K color selectable by selector switch or CCT tunable / dimmable.

### FEATURES


- 5-years limited warranty.
- 360 degree illumination.
- Ships Assembled
- Fixture delivered lumens per watt ratio 45 LPW..
- Customize color temperatures and adjust lumen output, Tunable White available.
- Driver concealed within the canopy or in the remote box.

### SPECIFICATIONS

- 90+ CRI.
- UL listed, suitable for Dry Location
- Input: 100-277V, 50/60Hz
- Built in color temperature selectable. Select from 3000K/3500K/4000K.
- 1-10V dimming standard, ELV, TRIAC dimming available.
- Suspended on 10’ adjustable height cables, custom cable lengths available
- Polished gold metal with 6” solid Crystal, each light 1.43 pounds, thick 1.0”.

### PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch

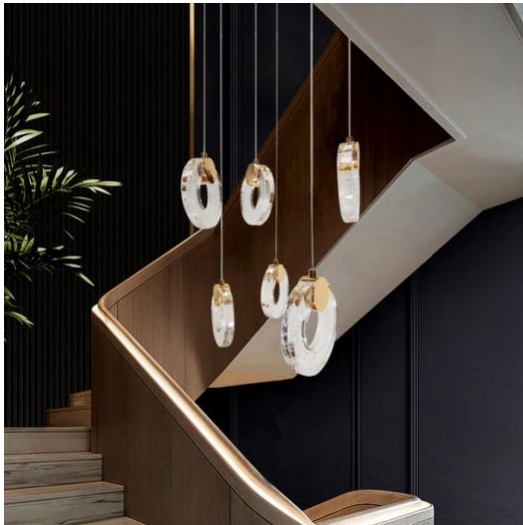

SB-M06A

**MODEL INFORMATION:**

**Example: SB-M06A40WSB**


| Products Series  | Wattage  | Options   | RGB/CCT Select Only                              | Canopy Finishes   | Aircraft Cable                  |
|--|----------|---|--|---|---------------------------------|
| *SB-M06A   | *40W=40W | *S=1-10V dimming, CRI 90<br>3000K/3500K/4000K Color Selectable (Standard), 4000K factory color default set. | T=3000K-4000K Tunable White                      | *B=Black Jack   | *Blank=10' foot 120" (Standard) |
|  |          | L=ELV / Triac dimming with 3000K/3500K/4000K Color Selectable   | R=RGB  | S=Platinum Silver   | 5'=5 foot 60"                   |
|  |          | D=DMX   |  | W=Gloss White   | 15'=15 foot 180"                |
|  |          | Z=ZigBee  |  |   | 20'=20 foot 240"                |
|  |          | <b>DMX for RGB and Tunable White, control by Wall Switch or DMX control system.</b>                         | <b>Do not select this column if selected "S"</b> | <b>Full Color Name or RAL number for Custom Colors, select from <a href="#">Color Collections</a></b> | 25'=25 foot 300"                |
| <b>ZigBee for RGB and CCT tunable / dimmable using remote, DMX , App and Google Alexa.</b> |          |   |  |   |                                 |

**LUMEN OUTPUT**

| Model Number | Number of lights | Wattage | Kevin                        | Lumen   |
|--------------|------------------|---------|------------------------------|---------|
| SB-M06A40W   | 6                | 40W     | 3000K/3500K/4000K selectable | 1200 lm |

**EMERGENCY BATTERY OPTIONS**

[SEE SPEC](#)

| PICTURE   | MODEL NUMBER   | DESCRIPTION  |
|---|----------------|--|
|  | SB-EBP/5W/B    | Factory installed Remote Emergency Battery Pack 5W 90 minutes    |
|   | SB-EBP/10.7W/B | Factory installed Remote Emergency Battery Pack 10.7W 90 minutes |
|   | SB-EBP/17W/B   | Factory installed Remote Emergency Battery Pack 17W 90 minutes   |

RGB/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

# Get Smart



Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

## DIMENSION & WEIGHT:

### SB-M06A

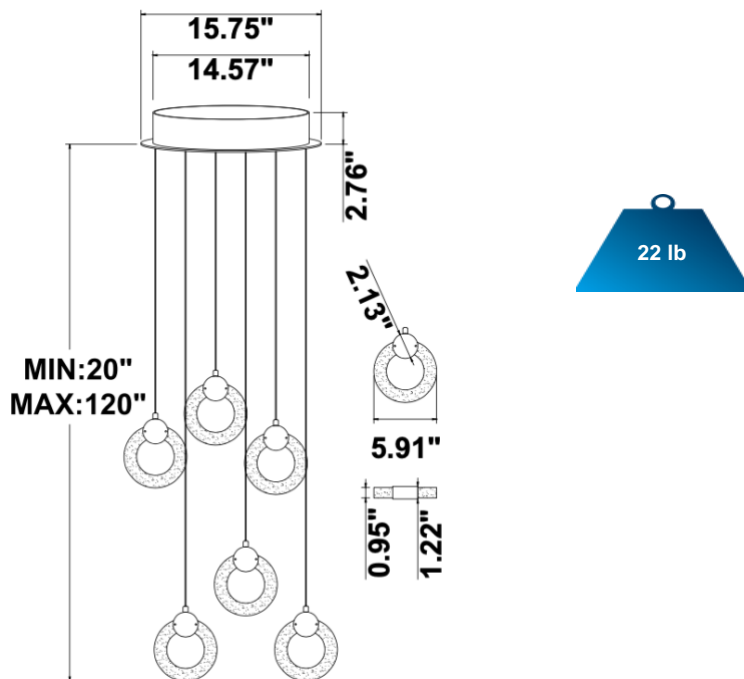

**PHOTOMETRIC: Test report for 1 light only**

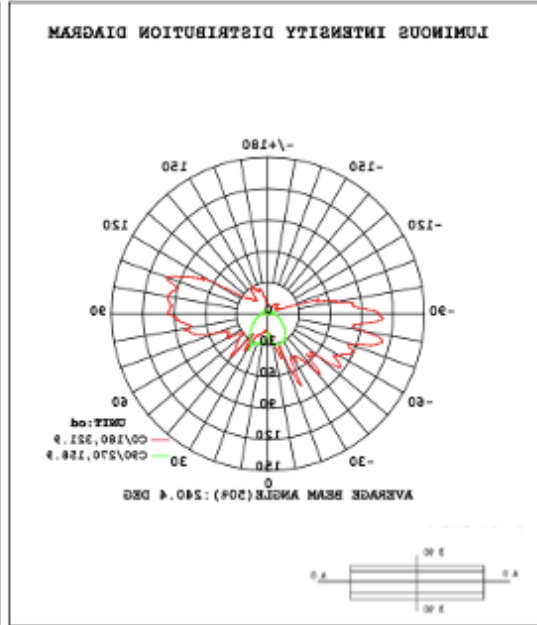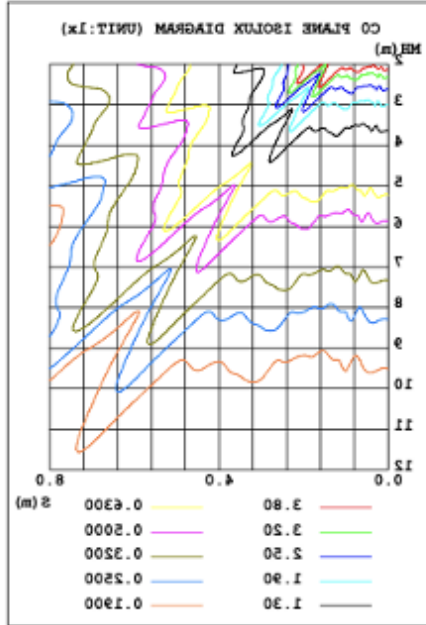

Flux out: 189.4 lm

| Height | Eavg, Emax       | Angle: 159.10deg | Diameter   |
|--------|------------------|------------------|------------|
| 1m     | 1.474, 56.35lx   |                  | 1084.59cm  |
| 2m     | 0.4686, 14.09lx  |                  | 2169.18cm  |
| 3m     | 0.2083, 6.262lx  |                  | 3253.77cm  |
| 4m     | 0.1171, 3.522lx  |                  | 4338.37cm  |
| 5m     | 0.0750, 2.254lx  |                  | 5422.96cm  |
| 6m     | 0.0521, 1.585lx  |                  | 6507.55cm  |
| 7m     | 0.0383, 1.150lx  |                  | 7592.14cm  |
| 8m     | 0.0293, 0.8805lx |                  | 8676.73cm  |
| 9m     | 0.0231, 0.6957lx |                  | 9761.32cm  |
| 10m    | 0.0187, 0.5635lx |                  | 10845.91cm |

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

