
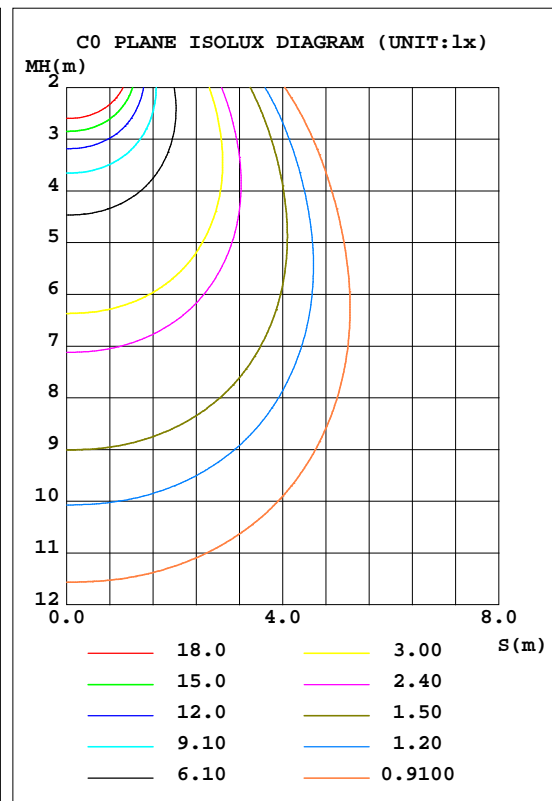


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.25V I:0.0650A P:7.2149W PF:0.5041 Freq:50.00Hz Lamp Flux:433.96lx1 lm		
NAME: SB-R01A05WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 60.15 lm/W			
MODEL		I _{max} (cd)	121.7	S/MH(C0/180)	1.21
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.22
RATED VOLTAGE(V)	--	TOTAL FLUX(lm)	433.96	η UP, DN(C0-180)	11.5, 38.4
NOMINAL FLUX(lm)	433.961	CIE CLASS	SEMI-D.	η UP, DN(C180-360)	11.1, 39.1
LAMPS INSIDE	1	η up(%)	22.6	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)	--	η down(%)	77.4	CIBSE SHR MAX	1.30

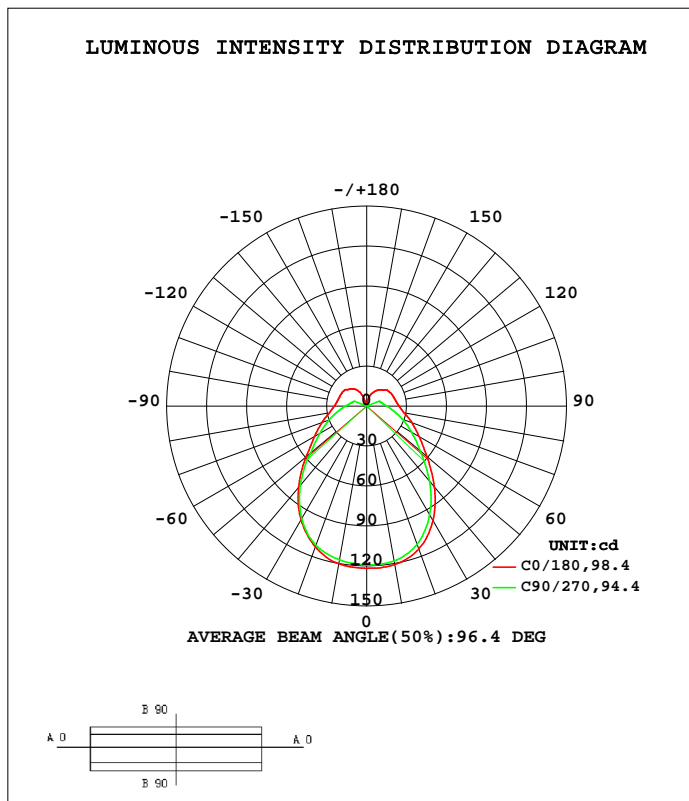

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3DEG
 Operators: XIAOMI
 Test Date: 2023-06-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity: 65.0%
 Test Distance: 9.000m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	120.8	120.0	118.0	117.0	120.2	118.5	117.2	116.7	0- 10	11.35	11.35	2.62,2.62
20	114.2	112.5	110.4	109.4	112.4	111.9	111.2	110.6	10- 20	32.60	43.96	10.1,10.1
30	99.45	96.86	94.54	93.93	98.59	97.23	97.51	96.70	20- 30	48.11	92.07	21.2,21.2
40	79.12	76.12	73.30	73.60	79.59	77.81	77.58	76.39	30- 40	54.22	146.3	33.7,33.7
50	59.14	56.35	52.84	54.31	59.62	57.57	55.11	55.36	40- 50	50.68	197.0	45.4,45.4
60	45.42	45.02	38.85	43.35	45.09	45.43	40.44	44.26	50- 60	43.56	240.5	55.4,55.4
70	36.10	35.72	28.41	34.64	35.62	35.89	29.92	35.42	60- 70	37.46	278.0	64.1,64.1
80	28.39	27.63	20.24	27.66	28.49	28.35	21.52	28.67	70- 80	31.78	309.8	71.4,71.4
90	24.33	23.52	15.14	24.01	24.37	23.66	15.95	24.63	80- 90	26.29	336.1	77.4,77.4
100	22.33	21.77	12.21	22.38	22.42	21.54	12.55	22.53	90-100	22.65	358.7	82.7,82.7
110	21.37	21.10	10.42	21.67	21.58	20.80	10.50	21.43	100-110	20.44	379.1	87.4,87.4
120	20.51	20.48	0.5684	21.05	21.10	20.45	0.5590	20.43	110-120	17.48	396.6	91.4,91.4
130	19.00	19.24	0.6599	19.76	19.41	19.70	0.6574	18.64	120-130	14.57	411.2	94.8,94.8
140	16.12	17.03	0.7764	17.53	17.11	17.82	0.7707	16.90	130-140	10.92	422.1	97.3,97.3
150	13.10	13.36	0.8786	13.66	13.66	12.06	0.8425	13.49	140-150	7.304	429.4	99.99
160	9.376	8.383	0.9605	4.636	4.353	2.633	0.9019	8.951	150-160	3.502	432.9	99.8,99.8
170	4.079	3.531	1.015	1.000	1.266	0.9838	0.9568	1.016	160-170	0.9237	433.8	100,100
180	1.061	1.018	1.002	1.017	1.069	1.021	1.005	1.018	170-180	0.1129	434.0	100,100
DEG	LUMINOUS INTENSITY:cd								UNIT:lm			

Conical surface Flux(90deg): 172.51 lm

%lum = 39.8%
%lamp = 39.8%

Conical surface Flux(120deg): 240.54 lm


%lum = 55.4%
%lamp = 55.4%

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature:25.3DEG
Operators:XIAOMI
Test Date:2023-06-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity:65.0%
Test Distance:9.000m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:220.25V I:0.0650A P:7.2149W PF:0.5041 Freq:50.00Hz Lamp Flux:433.961x1 lm		
NAME: SB-R01A05WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	

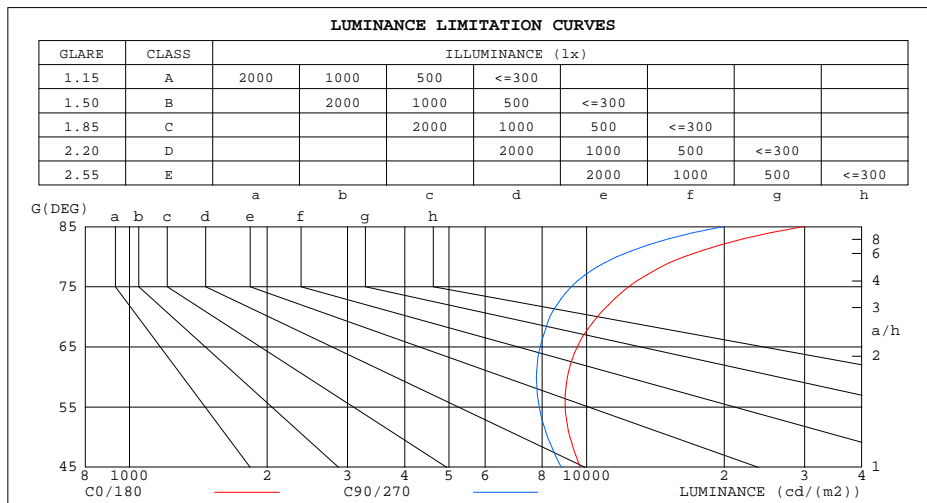

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	29864	19943
80	16347	11658
75	12362	9251
70	10554	8307
65	9539	7916
60	9084	7769
55	8980	7876
50	9201	8220
45	9691	8808


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.25V I:0.0650A P:7.2149W PF:0.5041 Freq:50.00Hz Lamp Flux:433.96lx1 lm		
NAME: SB-R01A05WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.14	1.14	1.14	1.08	1.08	1.08	.99	.99	.99	.90	.90	.90	.81	.81	.81	.77
1.0	.96	.92	.87	.92	.88	.84	.83	.80	.77	.76	.73	.71	.69	.66	.65	.61
2.0	.84	.76	.70	.80	.73	.68	.72	.67	.63	.66	.62	.58	.60	.56	.53	.50
3.0	.73	.65	.58	.70	.62	.56	.64	.58	.53	.58	.53	.49	.53	.49	.45	.42
4.0	.65	.56	.49	.62	.54	.48	.57	.50	.45	.52	.46	.42	.47	.43	.39	.36
5.0	.58	.49	.43	.56	.47	.41	.51	.44	.39	.47	.41	.36	.43	.38	.34	.31
6.0	.52	.44	.37	.50	.42	.36	.46	.39	.34	.42	.37	.32	.39	.34	.30	.28
7.0	.47	.39	.33	.46	.38	.32	.42	.35	.30	.39	.33	.29	.36	.31	.27	.25
8.0	.43	.35	.29	.42	.34	.29	.39	.32	.27	.36	.30	.26	.33	.28	.24	.22
9.0	.40	.32	.26	.38	.31	.26	.35	.29	.24	.33	.27	.23	.30	.25	.22	.20
10.0	.37	.29	.24	.35	.28	.23	.33	.27	.22	.30	.25	.21	.28	.23	.20	.18

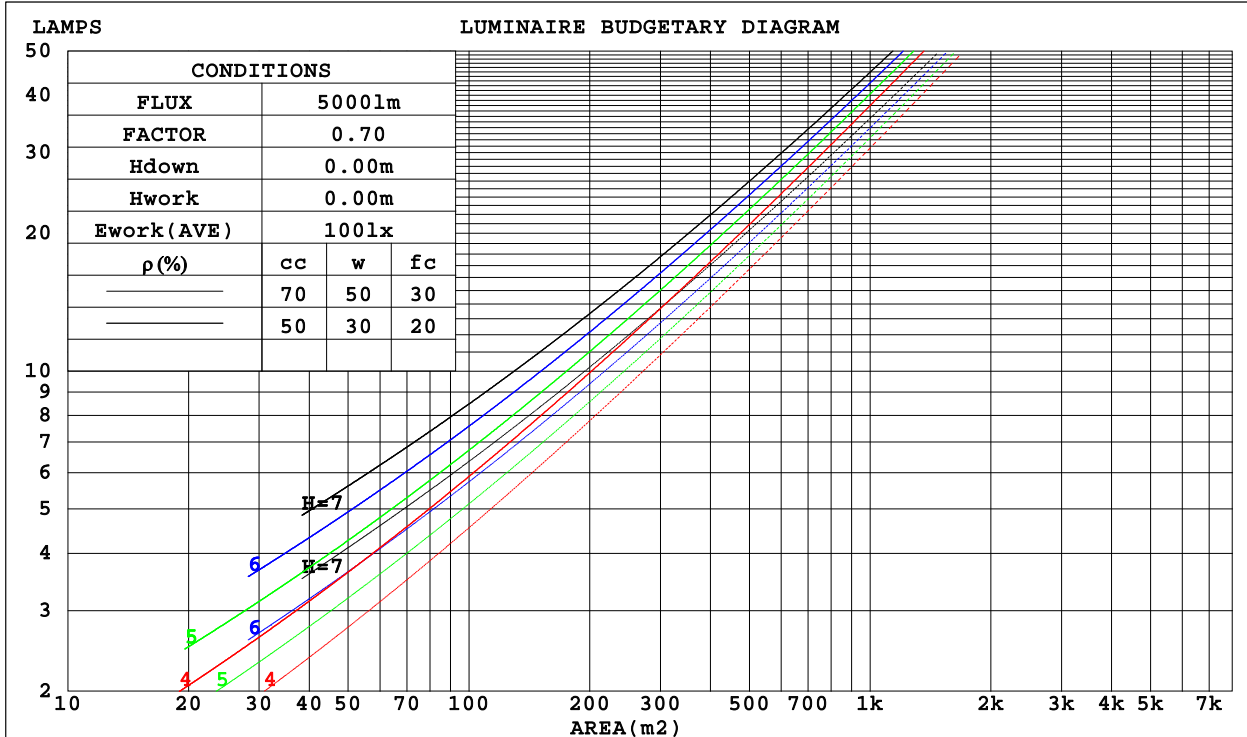

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:220.25V I:0.0650A P:7.2149W PF:0.5041 Freq:50.00Hz Lamp Flux:433.961x1 lm		
NAME: SB-R01A05WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.350	.199	.063	.336	.191	.061	.309	.177	.057	.285	.165	.053	.263	.152	.049	
2.0	.306	.167	.051	.293	.161	.050	.269	.150	.047	.247	.139	.043	.227	.129	.041	
3.0	.274	.146	.044	.262	.140	.042	.241	.131	.040	.221	.121	.037	.203	.112	.035	
4.0	.248	.129	.038	.238	.124	.037	.218	.116	.035	.200	.108	.032	.183	.100	.030	
5.0	.227	.116	.033	.218	.112	.033	.200	.104	.031	.183	.097	.029	.168	.090	.027	
6.0	.209	.105	.030	.200	.101	.029	.184	.094	.027	.169	.088	.026	.155	.082	.024	
7.0	.194	.096	.027	.186	.093	.026	.171	.086	.025	.157	.080	.023	.144	.075	.022	
8.0	.180	.088	.025	.173	.085	.024	.159	.080	.023	.147	.074	.021	.134	.069	.020	
9.0	.169	.082	.023	.162	.079	.022	.149	.074	.021	.137	.069	.020	.126	.064	.019	
10.0	.158	.076	.021	.152	.074	.021	.140	.069	.019	.129	.064	.018	.119	.060	.017	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.362	.362	.362	.310	.310	.310	.211	.211	.211	.121	.121	.121	.039	.039	.039	
1.0	.356	.329	.305	.305	.282	.262	.209	.194	.181	.120	.112	.105	.038	.036	.034	
2.0	.349	.306	.271	.299	.264	.234	.205	.182	.163	.118	.106	.096	.038	.034	.031	
3.0	.341	.290	.249	.292	.250	.216	.200	.174	.152	.116	.101	.089	.037	.033	.029	
4.0	.333	.277	.235	.286	.239	.204	.196	.167	.144	.114	.098	.085	.037	.032	.028	
5.0	.325	.267	.224	.279	.231	.195	.192	.162	.138	.111	.095	.082	.036	.031	.027	
6.0	.318	.259	.217	.273	.225	.189	.189	.157	.134	.109	.092	.080	.035	.030	.026	
7.0	.311	.253	.212	.268	.219	.184	.185	.154	.131	.107	.090	.078	.035	.030	.026	
8.0	.305	.247	.207	.262	.214	.181	.182	.151	.128	.106	.089	.076	.034	.029	.025	
9.0	.299	.242	.204	.257	.210	.178	.178	.148	.126	.104	.087	.075	.034	.029	.025	
10.0	.293	.238	.202	.253	.207	.176	.175	.146	.125	.102	.086	.075	.033	.028	.025	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.25V I:0.0650A P:7.2149W PF:0.5041 Freq:50.00Hz Lamp Flux:433.961x1 lm										
NAME: SB-R01A05WSZ					TYPE:			WEIGHT:		
SPEC.:4000K					DIM.:			SERIAL No.:		
MFR.: SNOWBALL					SUR.:					
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	18.6	19.8	19.1	20.4	21.0	18.4	19.6	18.9	20.2	20.8
3H	20.7	21.8	21.3	22.4	23.1	20.2	21.3	20.8	21.9	22.6
4H	21.9	23.0	22.5	23.6	24.3	21.2	22.2	21.8	22.8	23.5
6H	23.2	24.3	23.9	24.9	25.6	22.2	23.2	22.8	23.8	24.5
8H	24.0	25.0	24.7	25.6	26.4	22.8	23.7	23.4	24.4	25.1
12H	24.9	25.9	25.6	26.5	27.3	23.4	24.4	24.1	25.0	25.8
4H 2H	19.2	20.3	19.8	20.9	21.6	19.1	20.2	19.7	20.8	21.5
3H	21.6	22.5	22.2	23.2	23.9	21.2	22.2	21.9	22.8	23.6
4H	23.0	23.8	23.7	24.5	25.3	22.4	23.3	23.1	23.9	24.7
6H	24.5	25.3	25.2	26.0	26.8	23.7	24.4	24.4	25.1	26.0
8H	25.4	26.1	26.1	26.8	27.7	24.4	25.1	25.1	25.8	26.6
12H	26.5	27.1	27.2	27.8	28.7	25.1	25.8	25.9	26.5	27.4
8H 4H	23.5	24.2	24.2	24.9	25.7	23.0	23.7	23.7	24.4	25.3
6H	25.3	25.9	26.1	26.7	27.5	24.6	25.2	25.4	26.0	26.8
8H	26.4	26.9	27.1	27.7	28.6	25.6	26.1	26.3	26.9	27.8
12H	27.7	28.1	28.4	28.9	29.8	26.6	27.1	27.4	27.9	28.8
12H 4H	23.6	24.2	24.3	25.0	25.8	23.2	23.8	23.9	24.6	25.4
6H	25.5	26.1	26.3	26.8	27.7	24.9	25.5	25.7	26.2	27.1
8H	26.7	27.2	27.5	28.0	28.9	26.0	26.5	26.8	27.2	28.2
Variations with the observer position at spacings:										
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.2				
1.5H	+ 0.2 / - 0.2					+ 0.2 / - 0.3				
2.0H	+ 0.2 / - 0.3					+ 0.2 / - 0.4				

CIE Pub.117, 434.0 lm Total Lamp Luminous Flux Corrected (8log(F/F0) = -2.9)
 Area: 0.01 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:220.25V I:0.0650A P:7.2149W PF:0.5041 Freq:50.00Hz Lamp Flux:433.961x1 lm		
NAME: SB-R01A05WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) k(RI) x RCR = 5									
k = 0.60	51	39	32	49	38	32	47	37	31	25
0.80	60	48	40	58	47	40	55	45	39	31
1.00	67	55	47	65	54	47	61	54	45	36
1.25	74	62	54	71	60	53	66	57	51	41
1.50	79	67	59	76	65	58	70	62	56	45
2.00	85	75	67	82	73	66	76	68	62	50
2.50	90	80	73	86	77	71	79	72	67	53
3.00	93	84	78	89	81	75	82	76	71	56
4.00	97	90	84	93	87	81	85	80	76	60
5.00	100	94	88	96	90	85	87	83	79	63
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:220.25V I:0.0650A P:7.2149W PF:0.5041 Freq:50.00Hz Lamp Flux:433.96lx1 lm		
NAME: SB-R01A05WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	

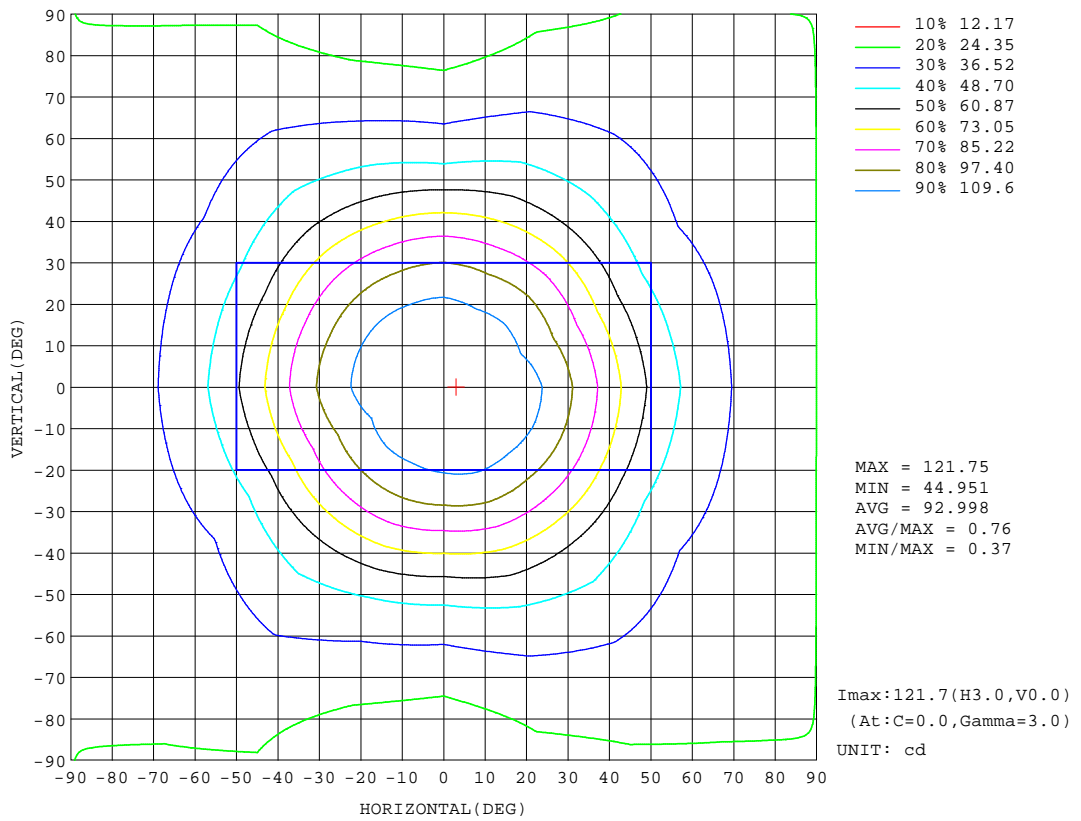


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

AAI Figure

Test:U:220.25V I:0.0650A P:7.2149W PF:0.5041 Freq:50.00Hz Lamp Flux:433.96lx1 lm		
NAME: SB-R01A05WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	

Flux out:182.5 lm

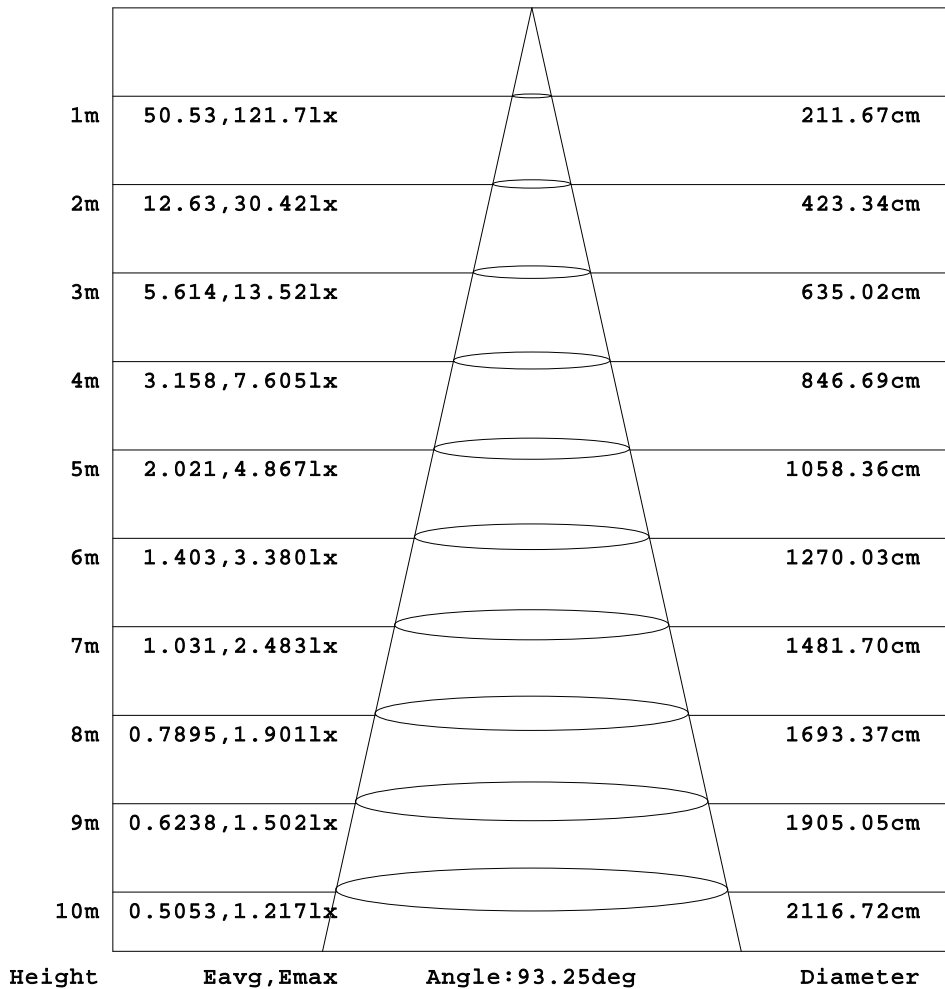


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM


Test:U:220.25V I:0.0650A P:7.2149W PF:0.5041 Freq:50.00Hz Lamp Flux:433.96lx1 lm		
NAME: SB-R01A05WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	

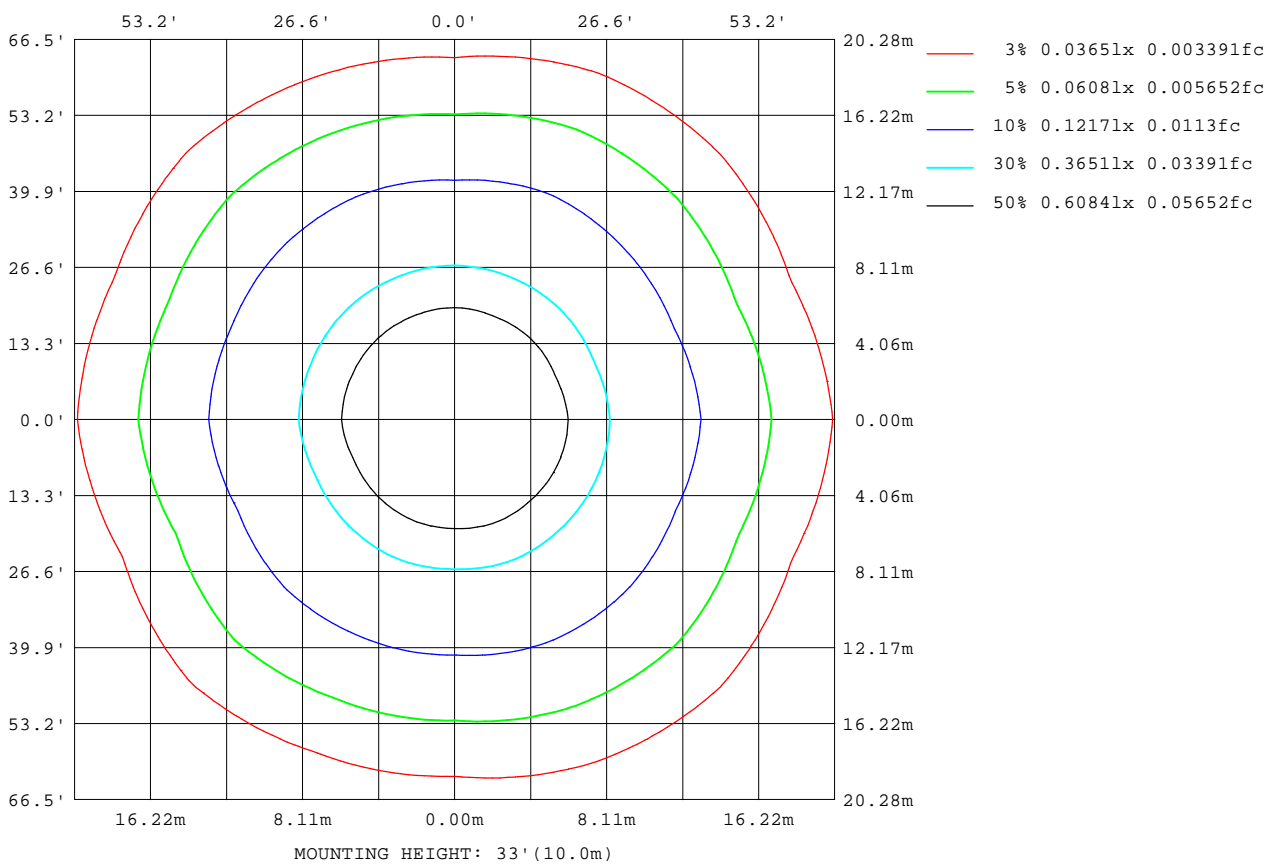

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks:

Planar Illuminance Curve

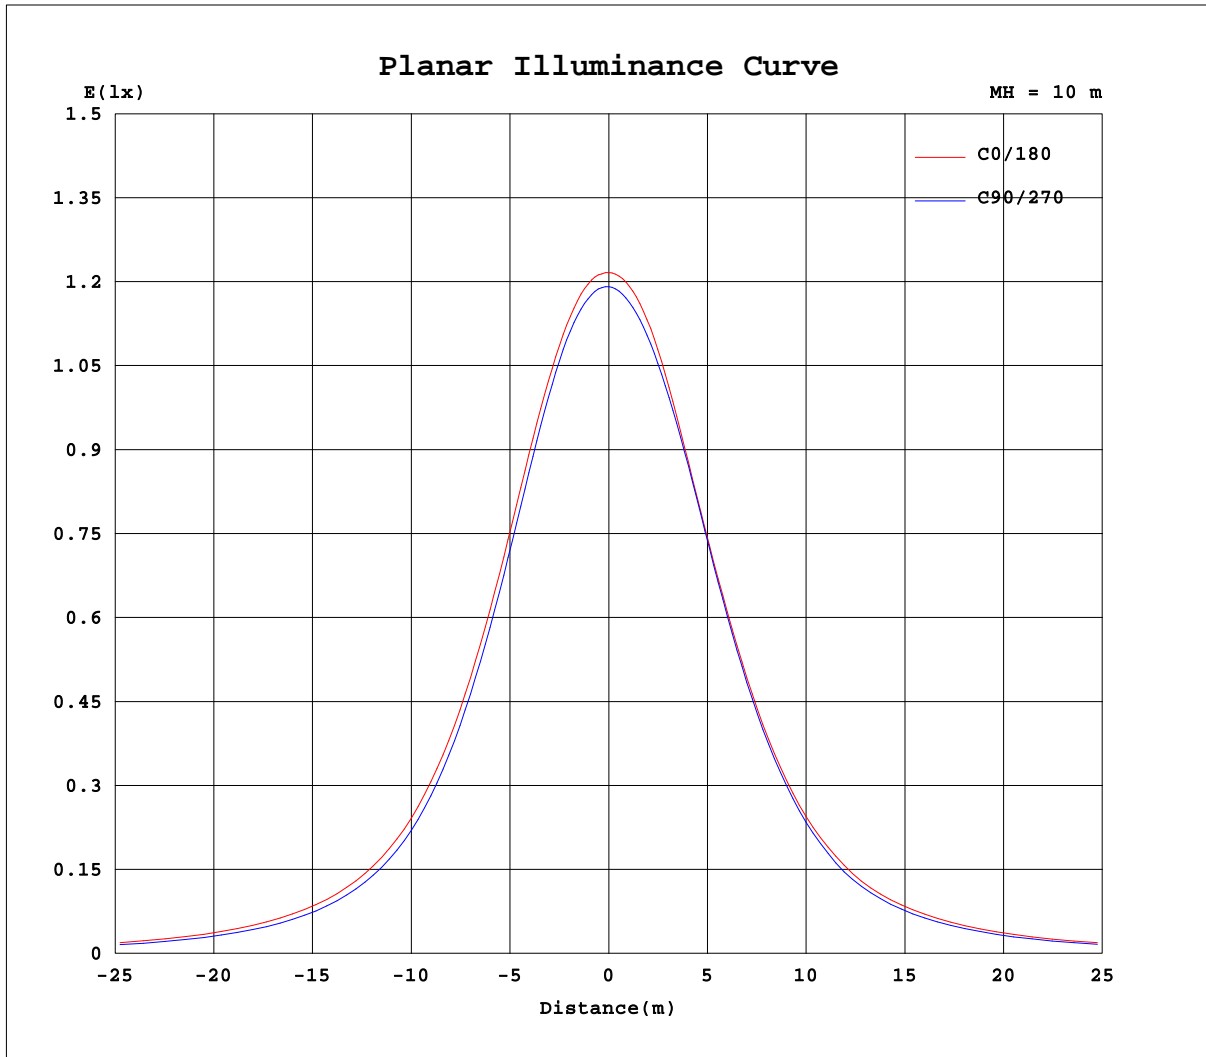

C Range: 0 - 360DEG
C Interval: 22.5DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: XIAOMI
Test Date: 2023-06-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE GO-3000H_V1 SYSTEM V2.00.411
Humidity: 65.0%
Test Distance: 9.000m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.25V I:0.0650A P:7.2149W PF:0.5041 Freq:50.00Hz Lamp Flux:433.961x1 lm		
NAME: SB-R01A05WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:	

Table--1

UNIT: cd

C(DEG) γ (DEG)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	122	121	120	120	119	119	118	118	122	121	120	120	119	119	118	118			
5	122	121	120	120	119	119	118	118	121	120	120	119	118	118	118	118			
10	121	120	120	119	118	117	117	116	120	119	118	118	117	117	117	117			
15	118	118	118	117	115	114	114	113	117	117	116	115	115	114	114	114			
20	114	114	113	112	110	109	109	108	112	112	112	111	111	110	111	110			
25	108	107	105	105	103	103	102	102	106	106	105	105	105	104	105	103			
30	99.4	98.5	96.9	96.7	94.5	94.6	93.9	93.8	98.6	97.3	97.2	96.8	97.5	95.9	96.7	95.2			
35	89.7	88.6	87.0	86.8	84.4	85.1	84.3	84.3	89.6	88.1	88.0	87.6	88.1	86.8	87.0	85.4			
40	79.1	77.4	76.1	75.9	73.3	74.2	73.6	73.5	79.6	77.7	77.8	77.3	77.6	76.8	76.4	74.7			
45	68.5	65.9	65.2	65.5	62.3	63.3	62.9	62.8	69.2	66.4	67.3	66.8	66.4	66.7	65.5	63.8			
50	59.1	54.9	56.3	56.1	52.8	53.2	54.3	52.4	59.6	56.5	57.6	57.4	55.1	58.0	55.4	54.1			
55	51.5	47.2	50.2	48.9	45.2	45.9	48.3	44.9	51.2	48.5	50.6	49.5	46.9	50.5	49.2	46.4			
60	45.4	41.2	45.0	42.9	38.8	39.9	43.3	39.1	45.1	42.3	45.4	43.0	40.4	44.5	44.3	40.5			
65	40.3	36.6	40.0	37.9	33.5	34.8	38.7	34.8	40.0	37.4	40.4	37.4	34.9	39.3	39.5	36.2			
70	36.1	34.7	35.7	33.7	28.4	30.4	34.6	32.7	35.6	34.9	35.9	32.6	29.9	34.9	35.4	34.4			
75	32.0	31.6	31.4	29.5	23.9	26.3	30.9	30.6	31.7	32.4	31.8	27.9	25.5	31.1	31.8	31.7			
80	28.4	28.1	27.6	26.2	20.2	23.0	27.7	27.6	28.5	28.6	28.4	24.1	21.5	27.4	28.7	28.3			
85	26.0	25.6	25.2	23.8	17.4	20.4	25.5	25.5	26.1	25.9	25.7	21.2	18.4	24.8	26.3	26.0			
90	24.3	23.8	23.5	22.0	15.1	18.5	24.0	23.9	24.4	24.0	23.7	18.9	16.0	22.1	24.6	24.4			
95	23.1	22.6	22.5	20.9	13.5	17.1	23.0	23.0	23.2	22.7	22.4	17.1	14.0	18.1	23.4	23.3			
100	22.3	21.9	21.8	20.2	12.2	16.0	22.4	22.3	22.4	21.9	21.5	15.9	12.6	20.8	22.5	22.4			
105	21.8	21.5	21.4	19.8	11.2	15.2	22.0	21.9	21.9	21.4	21.1	14.9	11.4	19.7	21.9	21.9			
110	21.4	21.1	21.1	19.5	10.4	14.6	21.7	21.6	21.6	21.1	20.8	14.2	10.5	18.5	21.4	21.4			
115	21.0	20.8	20.8	19.2	1.32	14.0	21.4	21.3	21.4	20.9	20.6	13.4	1.26	16.8	21.0	20.9			
120	20.5	20.4	20.5	18.8	0.57	13.4	21.0	21.0	21.1	20.7	20.5	12.2	0.56	18.5	20.4	20.3			
125	19.9	19.9	20.0	18.2	0.61	12.7	20.5	20.5	20.7	20.3	20.2	9.71	0.60	16.3	19.8	19.6			
130	19.0	19.0	19.2	17.4	0.66	12.0	19.8	19.2	19.4	19.3	19.7	7.88	0.66	16.7	18.6	18.5			
135	17.3	16.6	18.3	16.4	0.72	11.3	18.8	17.3	18.2	17.7	19.0	7.21	0.77	12.1	15.7	16.3			
140	16.1	14.7	17.0	15.2	0.78	10.4	17.5	15.3	17.1	15.9	17.8	6.52	0.77	14.6	16.9	11.7			
145	14.7	12.6	15.4	13.6	0.83	9.52	15.9	13.1	15.7	13.6	16.0	5.75	0.80	12.4	15.4	11.6			
150	13.1	10.3	13.4	11.8	0.88	8.45	13.7	10.6	13.7	11.2	12.1	5.27	0.84	7.77	13.5	11.0			
155	11.3	9.13	11.0	9.63	0.93	7.04	10.7	8.09	10.9	8.06	3.90	4.65	0.87	2.75	10.5	8.96			
160	9.38	7.92	8.38	6.38	0.96	4.97	4.64	1.86	4.35	1.78	2.63	1.43	0.90	5.66	8.95	7.34			
165	6.87	6.43	5.44	4.01	0.99	1.67	0.97	1.81	2.05	1.40	1.08	0.95	0.93	3.28	6.01	5.84			
170	4.08	4.21	3.53	1.13	1.01	1.01	1.00	1.09	1.27	1.16	0.98	0.97	0.96	0.97	1.02	1.21			
175	1.26	1.21	1.10	1.03	1.01	1.01	1.01	1.01	1.06	1.01	1.00	0.99	0.99	1.00	1.02	1.10			
180	1.06	1.03	1.02	1.01	1.00	1.01	1.02	1.03	1.07	1.03	1.02	1.01	1.00	1.00	1.02	1.02			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3DEG
 Operators:XIAOMI
 Test Date:2023-06-24

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-3000H_V1 SYSTEM V2.00.411
 Humidity:65.0%
 Test Distance:9.000m [K=1.0000]
 Remarks: