



## Vail 8 Tier E White / G White Gold

### PRODUCT DESCRIPTION

Each Vail light pod is roughly 3.5" dia. and weighs just over 1 lb, It is machined from a block of solid aluminum. It has an indirect and direct lighting component. Available with 1 to 16 light pods. Custom configurations, over 6,500 color finishes and suspension cable lengths are available. 3000K/3500K/4000K selectable by switch or RGB, Tunable White / Dimmable. Ships assembled.

### FEATURES

- 5-years limited warranty.
- Direct and Indirect illumination.
- Ships Assembled.
- Fixture delivered lumens per watt ratio 22 LPW.
- Customize color temperatures and adjust lumen output, RGB, Tunable White available.
- Driver concealed within the canopy or in the remote box.
- White and White with Gold color finish as standard, custom color is available.

### SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz
- UL listed, suitable for dry Location
- Built in color temperature selectable. Select from 3000K/3500K/4000K.
- 1-10V dimming standard, ELV, TRIAC dimming available.
- Suspended on 10' adjustable height cables, custom cable lengths available
- Solid aluminum housing, each individual Vail size 3.35" x 3.48", 1.15 lbs.

### PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch



SB-P08E White



SB-P08G White Gold

**MODEL INFORMATION:**

**Example: SB-P08E60WSB**

| Products Series   | Vail housing Finishes   | Wattage  | Options  | RGB/CCT Select Only  | Canopy Finishes   | Aircraft Cable                     |
|---|---|--|--|--|-------------------|------------------------------------|
| *SB-P08   | *E=White(standard)  | *60W=60W   | *S=1-10V dimming, CRI 90<br>3000K/3500K/4000K Color<br>Selectable (Standard),<br>4000K factory color default<br>set. | T=3000K-4000K<br>Tunable White   | *B=Black Jack     | *Blank=10' foot<br>120" (Standard) |
|   | G=White with Gold<br>(standard)   |  | L=ELV / Triac dimming with<br>3000K/3500K/4000K Color<br>Selectable  | R=RGB  | S=Platinum Silver | 5'=5 foot 60"                      |
|   |   |  | D=DMX  |  | W=Gloss White     | 15'=15 foot 180"                   |
|   |   |  | Z=ZigBee   |  |                   | 20'=20 foot 240"                   |
| Full Color Name<br>or RAL number for<br>Custom Colors,<br>select from <a href="#">Color<br/>Collections</a> | DMX for RGB and Tunable<br>White, control by Wall<br>Switch or DMX control<br>system. | ZigBee for RGB and CCT<br>tunable / dimmable using<br>remote, DMX , App and<br>Google Alexa. | Do not select<br>this column if<br>selected "S"  | Full Color Name<br>or RAL number<br>for Custom<br>Colors, select<br>from <a href="#">Color<br/>Collections</a> | 25'=25 foot 300"  |                                    |

**LUMEN OUTPUT**

| Model Number | Number of lights | Wattage | Kevin                        | Lumen   |
|--------------|------------------|---------|------------------------------|---------|
| SB-P08E/G    | 8                | 60W     | 3000K/3500K/4000K selectable | 1448 lm |

**STANDARD COLOR FINISHES**



E: White




G: White with Gold

In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample or any RAL finish. Add texture and originality to create a perfect match

**EMERGENCY BATTERY OPTIONS**


[SEE SPEC](#)

| PICTURE   | MODEL NUMBER   | DESCRIPTION  |
|---|----------------|--|
|  | SB-EBP/5W/B    | Factory installed Remote Emergency Battery Pack 5W 90 minutes    |
|   | SB-EBP/10.7W/B | Factory installed Remote Emergency Battery Pack 10.7W 90 minutes |
|   | SB-EBP/17W/B   | Factory installed Remote Emergency Battery Pack 17W 90 minutes   |



# Get Smart

Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

**DIMENSION & WEIGHT:** Canopy Size for ZigBee & DMX: 15.75" x 2.76"

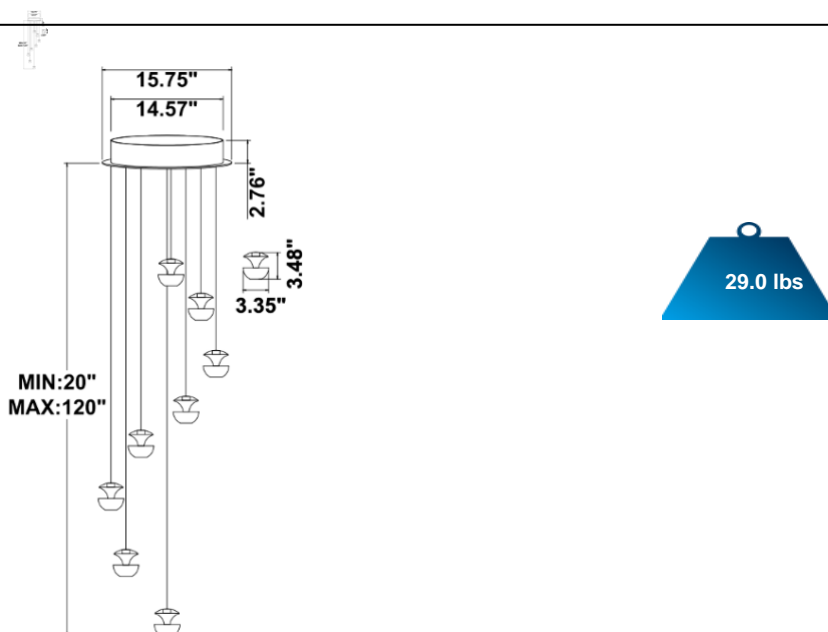

**PHOTOMETRIC: Test report for 1 Light only**

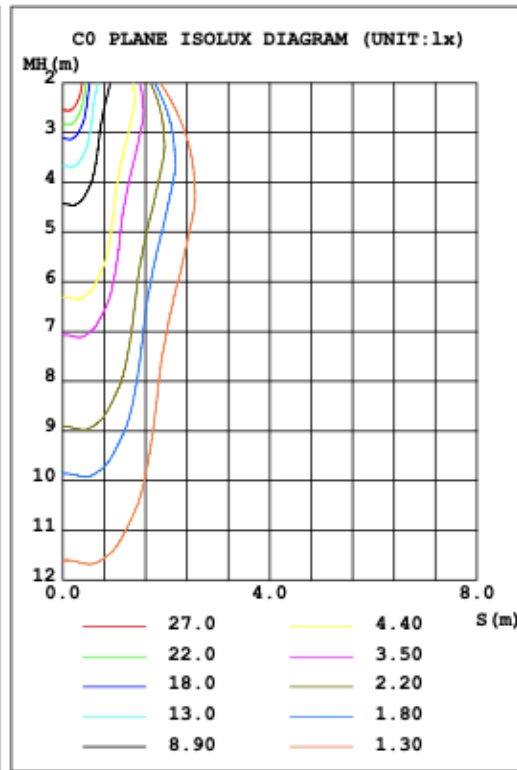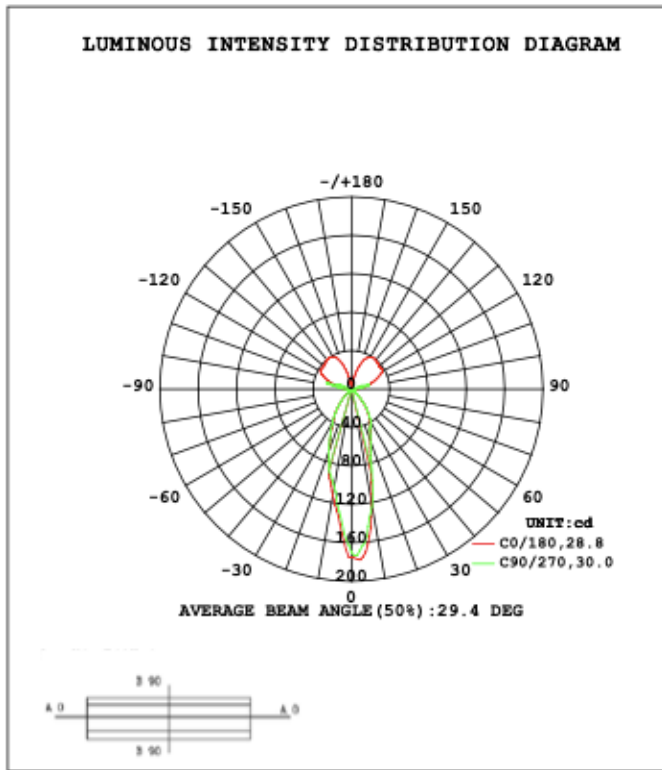

Flux out: 25.29 lm

| Height | Eavg, Emax     | Angle: 28.85deg | Diameter |
|--------|----------------|-----------------|----------|
| 1m     | 112.1, 189.0lx |                 | 51.45cm  |
| 2m     | 28.03, 47.24lx |                 | 102.91cm |
| 3m     | 12.46, 21.00lx |                 | 154.36cm |
| 4m     | 7.007, 11.81lx |                 | 205.81cm |
| 5m     | 4.484, 7.559lx |                 | 257.26cm |
| 6m     | 3.114, 5.249lx |                 | 308.72cm |
| 7m     | 2.288, 3.856lx |                 | 360.17cm |
| 8m     | 1.752, 2.953lx |                 | 411.62cm |
| 9m     | 1.384, 2.333lx |                 | 463.07cm |
| 10m    | 1.121, 1.890lx |                 | 514.53cm |

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

