

## Bromont 1 Tier

### PRODUCT DESCRIPTION

**Bromont circular** pendants are made of extruded aluminum with direct and indirect lighting components using a glare free acrylic ring. Sizes range from 15.75" to 70.87" and can be combined as desired to create multiple ring masterpieces. Tunable white and RGBW. Over 6500 powder coated colors, ships assembled.

### FEATURES

- 5-year limited warranty.
- Ships assembled.
- Direct and Indirect Illumination.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- Fixture delivered lumens per watt ratio up to 56 LPW.

### SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location.
- Gloss White, Black Jack, Platinum Silver and Oil bronze color finish as standard, 6,500 custom colors are available.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

### PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch



**SB-U101A**



**SB-U101B**



**SB-U101C**

## MODEL INFORMATION:

Example: SB-U101A20WSB

| Products Series                                                                                                                                                 | Wattage/Size | Kelvin temp options (standard)                                                                                                | Controls ( don't select this column if selected S or A)                                          | Profile Finishes                                                                                                                                                                 | Aircraft Cable                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| *SB-U101A<br>SB-U101B<br>SB-U101C                                                                                                                               | 20W=15.75"   | *S=3000K/3500K/4000K Color Select<br>by internal CCT Color Selector<br>(Standard), 4000K factory color<br>default set, CRI 90 | *Blank=1-10V dimming                                                                             | *B=Black Jack                                                                                                                                                                    | *Blank=10' feet<br>120" (Standard) |
|                                                                                                                                                                 | 30W=23.62"   |                                                                                                                               |                                                                                                  | S=Platinum Silver                                                                                                                                                                | 5'=5 feet 60"                      |
|                                                                                                                                                                 | 40W = 31.5"  |                                                                                                                               | L=ELV / Triac dimming                                                                            | W=Gloss White                                                                                                                                                                    | 15'=15 feet 180"                   |
|                                                                                                                                                                 | 50W = 39.37" |                                                                                                                               |                                                                                                  | O=Oil Rubbed<br>Bronze                                                                                                                                                           | 20'=20 feet 240"                   |
|                                                                                                                                                                 | 60W = 47.24" | A=2700K/3500K/4000K Color Select<br>by internal CCT color Selector, 4000K<br>factory color default set. CRI 90                | D=DMX (for RGBW and<br>Tunable White, control by<br>Wall Switch or DMX<br>control system)        |                                                                                                                                                                                  | 25'=25 feet 300"                   |
|                                                                                                                                                                 | 70W = 59.06" | T=3K-4K Tunable White control by<br>remote/wall control                                                                       | C=Dali                                                                                           |                                                                                                                                                                                  |                                    |
|                                                                                                                                                                 | 80W = 70.87" | R3= RGB+3000K                                                                                                                 | Z=ZigBee (for RGBW and<br>CCT tunable / dimmable<br>using remote, App and<br>Google Alexa voice. | <b>Full Color Name<br/>           or RAL number<br/>           for Custom<br/>           Colors, select<br/>           from <a href="#">Color<br/>           Collections</a></b> |                                    |
| <b>Request price for other Kelvin<br/>           temp, different percentage of<br/>           lumen output for up lighting<br/>           and down lighting</b> |              | R4=RGB+4000K (standard)                                                                                                       | <a href="#">See control options</a>                                                              |                                                                                                                                                                                  |                                    |

## LUMEN OUTPUT

| Model Number | Size   | Wattage | Kevin Temp field selectable            | Lumen   |
|--------------|--------|---------|----------------------------------------|---------|
| SB-U101A/B/C | 15.75" | 20W     | 2700K/3500K/3500K<br>3000K/3500K/4000K | 1034 lm |
|              | 23.62" | 30W     | 2700K/3500K/3500K<br>3000K/3500K/4000K | 1656 lm |
|              | 31.50" | 40W     | 2700K/3500K/3500K<br>3000K/3500K/4000K | 2161 lm |
|              | 39.37" | 50W     | 2700K/3500K/3500K<br>3000K/3500K/4000K | 2816 lm |
|              | 47.24" | 60W     | 2700K/3500K/3500K<br>3000K/3500K/4000K | 3361 lm |
|              | 59.06" | 70W     | 2700K/3500K/3500K<br>3000K/3500K/4000K | 3975 lm |
|              | 70.87" | 80W     | 2700K/3500K/3500K<br>3000K/3500K/4000K | 4479 lm |

## STANDARD COLOR FINISHES



In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample or any RAL finish. Add texture and originality to create a perfect match.

## EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

| PICTURE                                                                            | MODEL NUMBER   | DESCRIPTION                                                      |
|------------------------------------------------------------------------------------|----------------|------------------------------------------------------------------|
|  | SB-EBP/5W/B    | Factory installed Remote Emergency Battery Pack 5W 90 minutes    |
|                                                                                    | SB-EBP/10.7W/B | Factory installed Remote Emergency Battery Pack 10.7W 90 minutes |
|                                                                                    | SB-EBP/17W/B   | Factory installed Remote Emergency Battery Pack 17W 90 minutes   |

## RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

### Get Smart


Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

**DIMENSIONS & WEIGHTS:** Canopy Size for ZigBee & DMX: 15.75" x 2.76"


**SB-U01A**

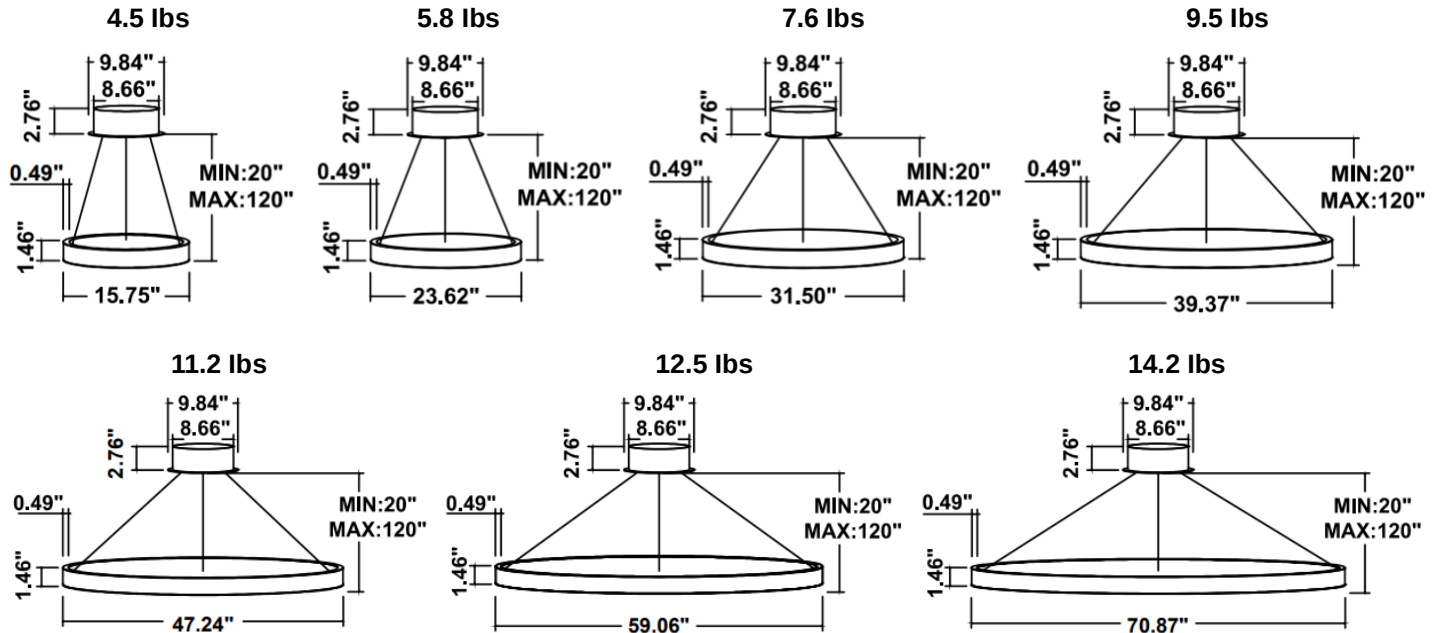

**SB-U01B**

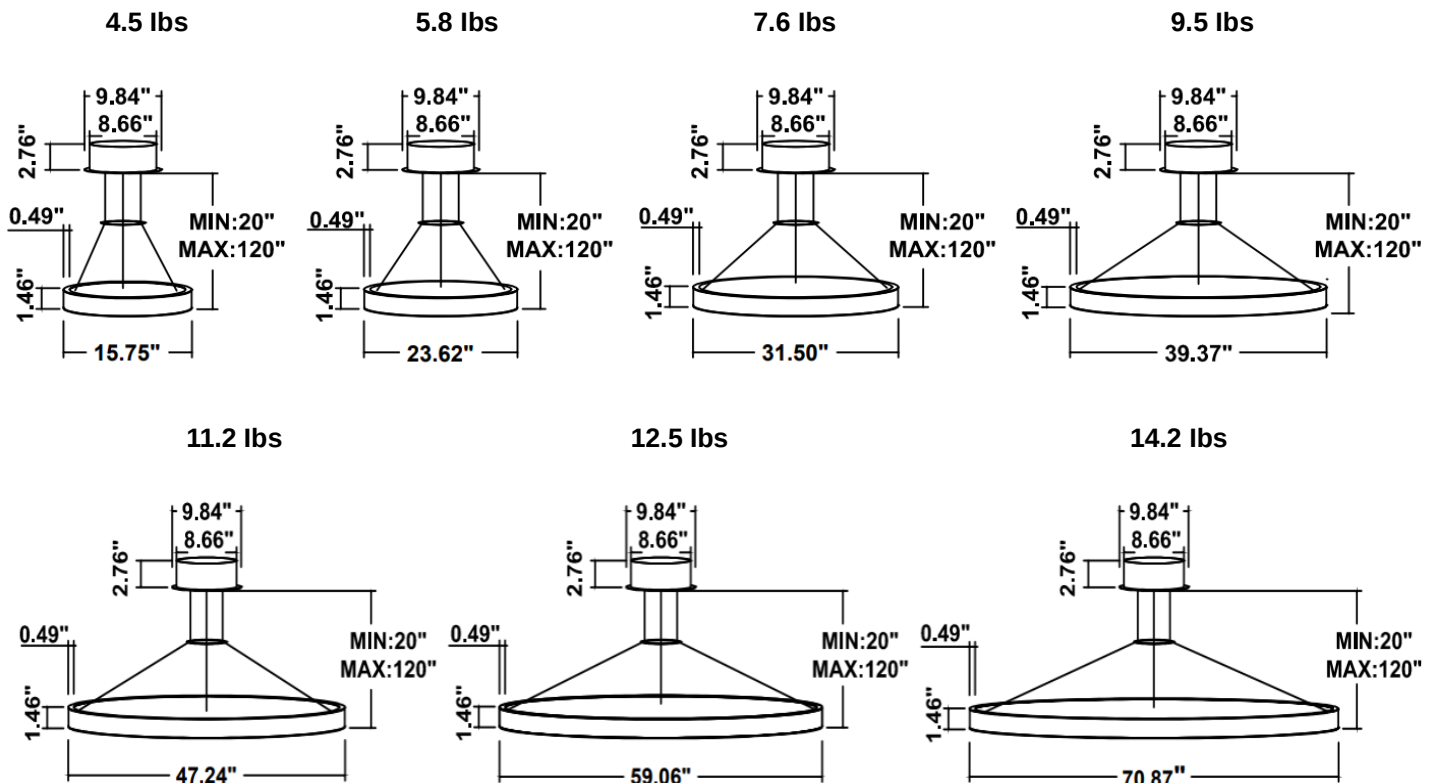


## SB-U01C

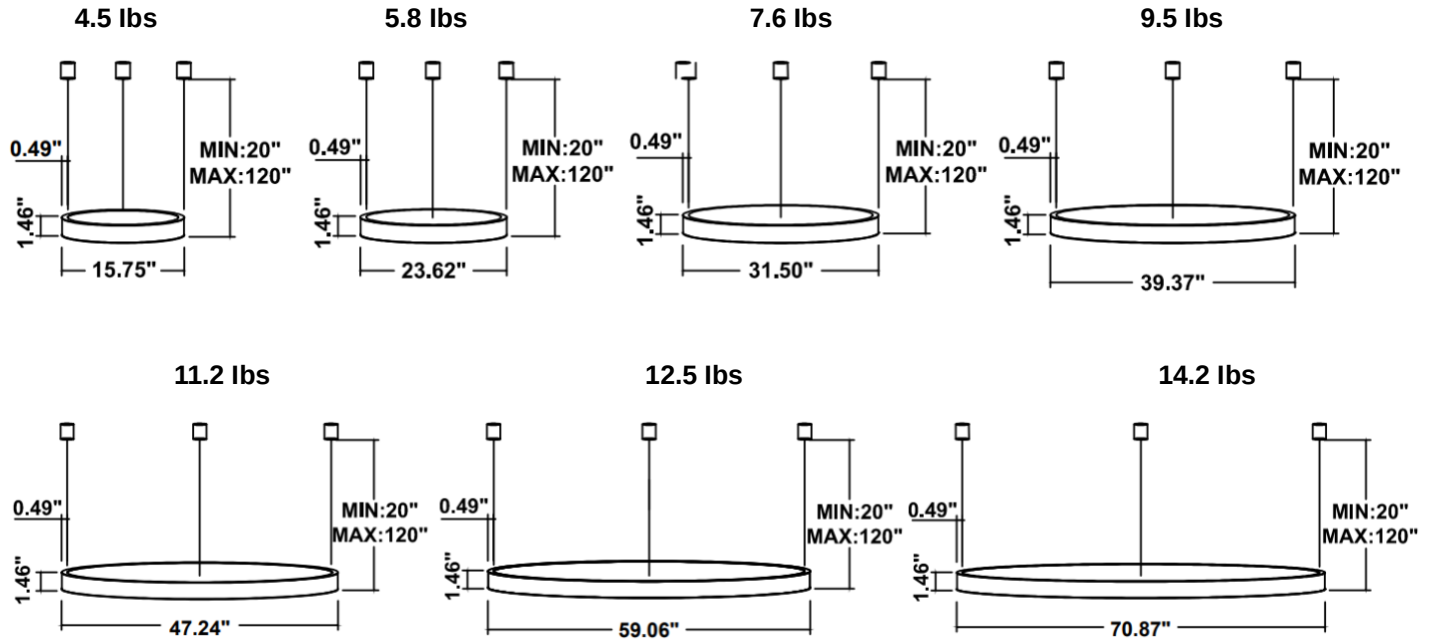


## PHOTOMETRIC:


### SB-U101A20WSZ 15.75" 20W @ 4000K

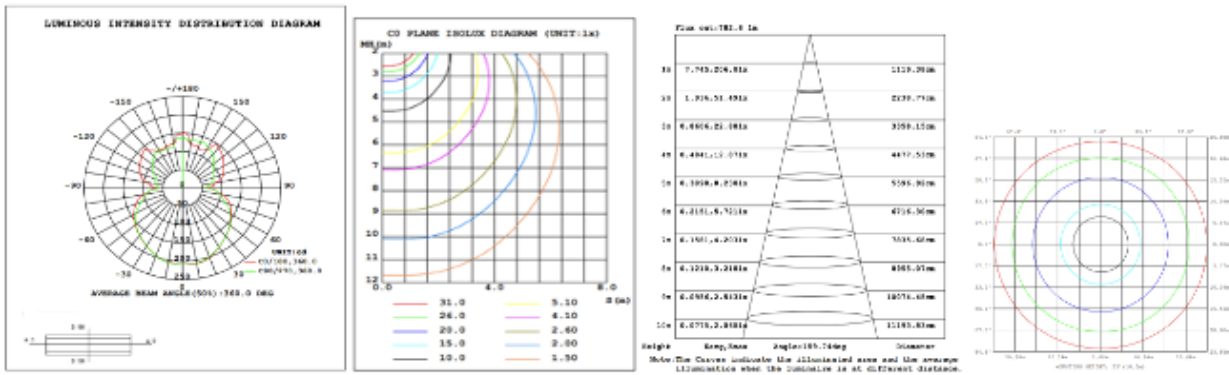


### SB-U101A30WSZ 23.62" 30W @ 4000K

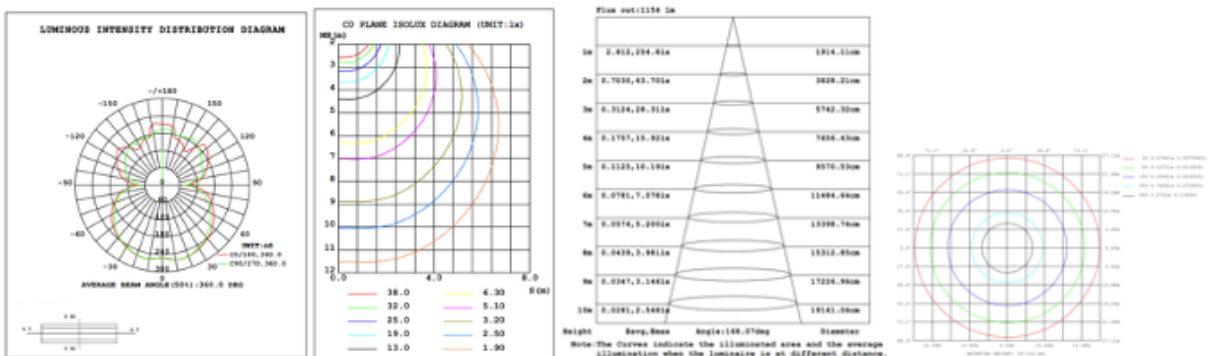


**SB-U101A40WSZ 31.5" 40W @ 4000K**

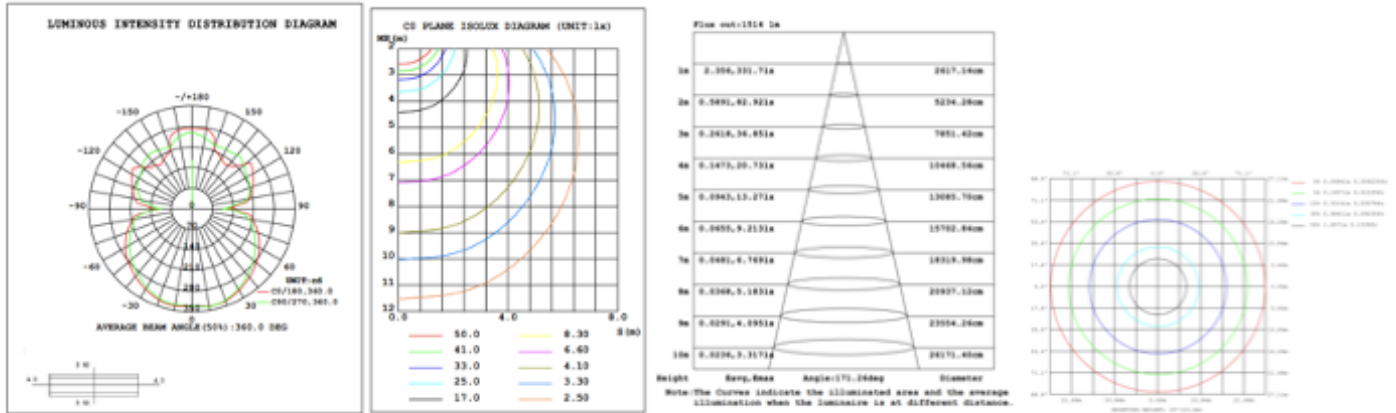


**SB-U101A50WSZ 39.37" 50W @ 4000K**

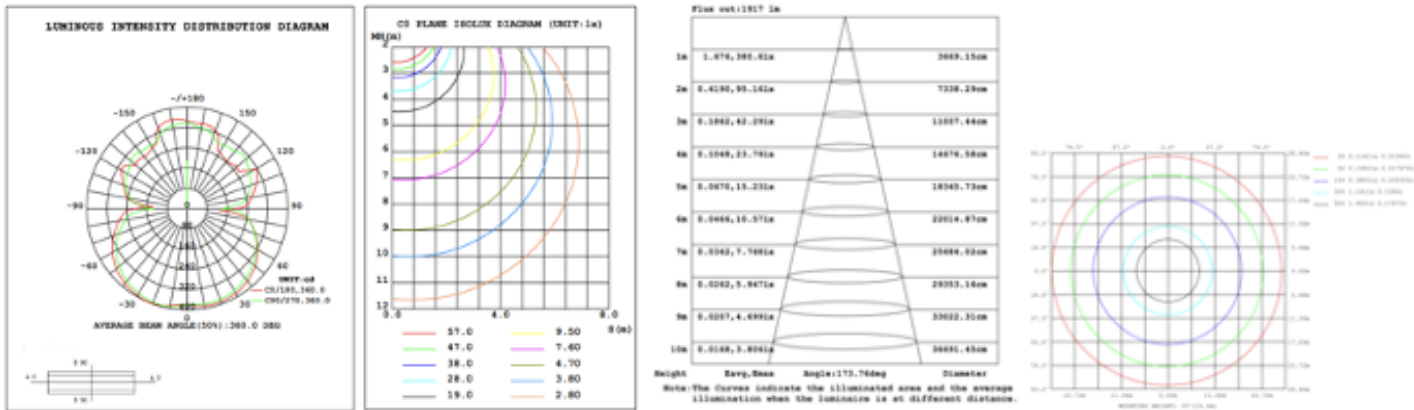

**SB-U101A60WSZ 47.24" 60W @ 4000K**

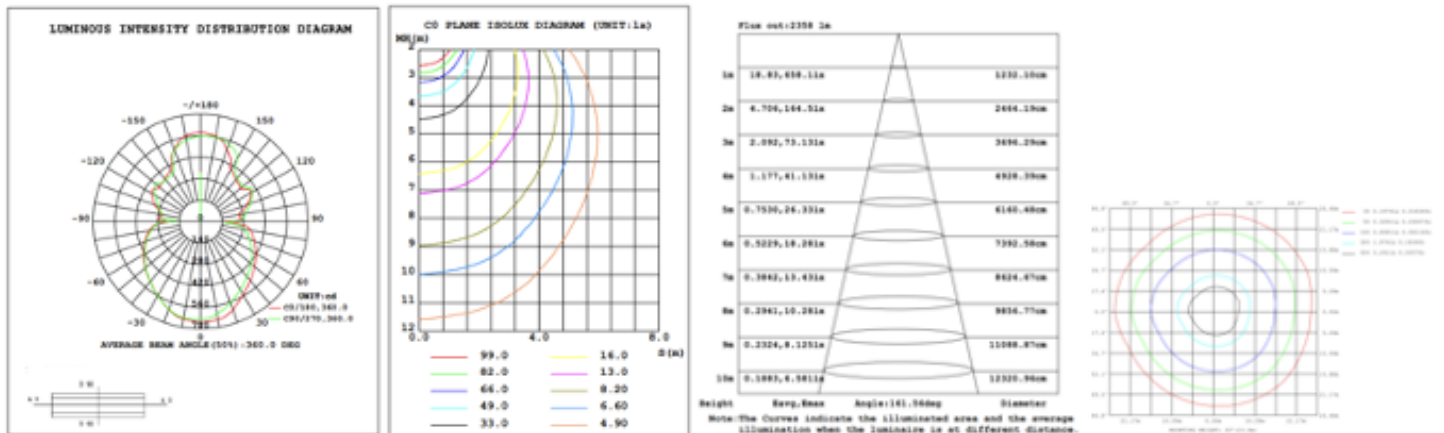

**SB-U101A70WSZ 59.06" 70W @ 4000K**

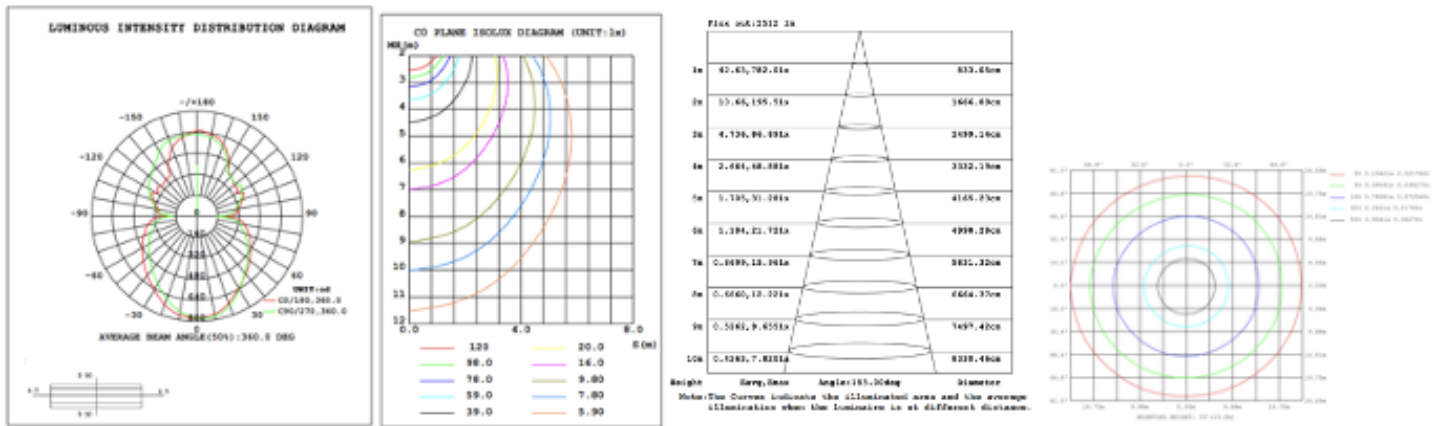

**SB-U101A80WSZ 70.87" 80W @ 4000K**

