

## Keystone 1 Tier



### PRODUCT DESCRIPTION

The **Keystone** circular pendants are made of extruded aluminum with a direct only component and a glare free flash lens. Sizes range from 15.57" to 70.87" and can be combined as desired to create multiple ring masterpieces. Tunable white and RGBW. Over 6500 powder coated colors, ships assembled.

### FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination inside or outside the profile.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- Fixture delivered lumens per watt ratio up to 53 LPW.



**SB-D101A**



**SB-D101B**



**SB-D101C**

### SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location.
- Gloss White, Black Jack, Platinum Silver and Oil bronze color finish as standard, 6,500 custom colors are available.
- Built in color temperature selectable. Choose from 2700K/3500K/4000K ; 3000K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

### PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- [CCT Selector Switch](#)

**MODEL INFORMATION:**

**Example: SB-D101A20WSB**

Products Series	Wattage/Size	"E" Kelvin temp options (standard)	"W" Controls ( don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-D101A SB-D101B SB-D101C	20W=15.75"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming	*B=Black Jack	*Blank=10' feet 120" (Standard)
	30W=23.62"			S=Platinum Silver	5'=5 feet 60"
	40W = 31.50"		L=ELV / Triac dimming	W=Gloss White	15'=15 feet 180"
	50W = 39.37"			O=Oil Rubbed Bronze	20'=20 feet 240"
	60W = 47.24"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)		25'=25 feet 300"
	70W = 59.06"	T=3K-4K Tunable White control by remote/wall control	C=Dali		
80W = 70.87"	R3= RGB+3000K	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	<b>Full Color Name or RAL number for Custom Colors, select from <a href="#">Color Collections</a></b>		
<b>Request price for other Kelvin temp</b>		R4=RGB+4000K (standard)	<a href="#">See control options</a>		

**LUMEN OUTPUT**

Model Number	Size	Wattage	Kevin Temp field Selectable	Delivered Lumen
SB-D101A/B/C	15.75"	20W	2700K/3500K/3500K 3000K/3500K/4000K	866 lm
	23.62"	30W	2700K/3500K/3500K 3000K/3500K/4000K	1461 lm
	31.50"	40W	2700K/3500K/3500K 3000K/3500K/4000K	1947 lm
	39.37"	50W	2700K/3500K/3500K 3000K/3500K/4000K	2340 lm
	47.24"	60W	2700K/3500K/3500K 3000K/3500K/4000K	3057 lm
	59.06"	70W	2700K/3500K/3500K 3000K/3500K/4000K	3471 lm
	70.87"	80W	2700K/3500K/3500K 3000K/3500K/4000K	4302 lm


## STANDARD COLOR FINISHES



In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample or any RAL finish. Add texture and originality to create a perfect match.

## EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

## RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

### Get Smart


Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

**DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"**


**SB-D101A**

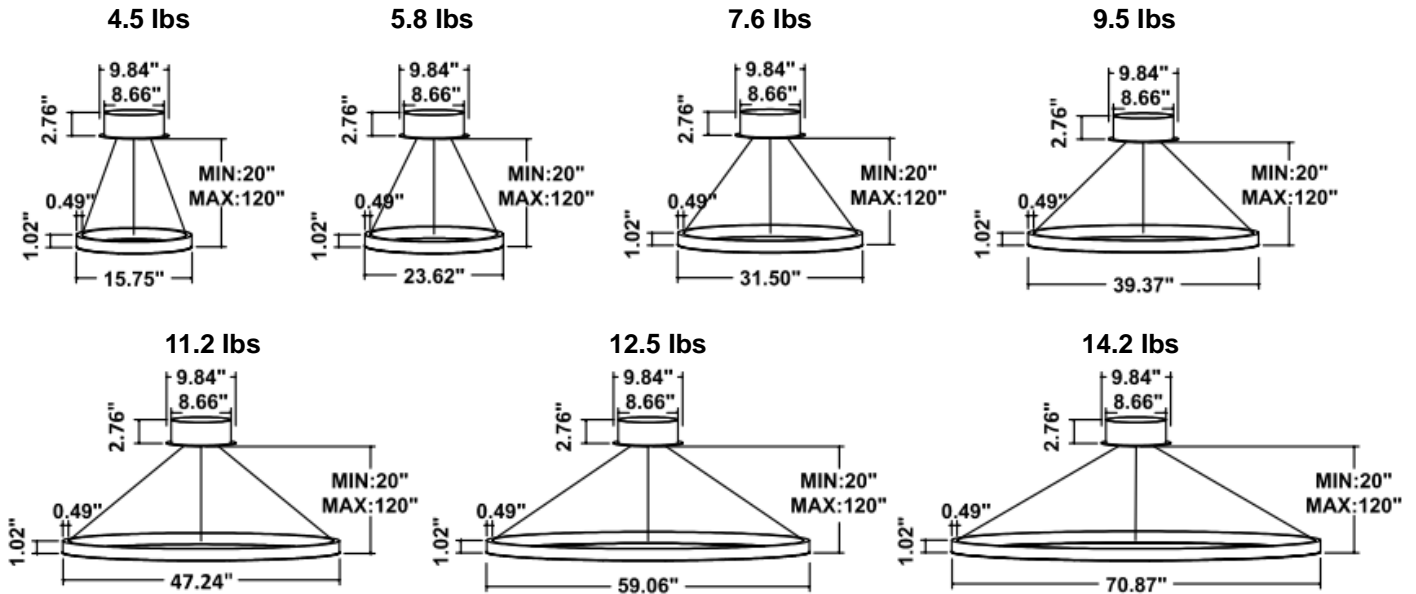

**SB-D101B**

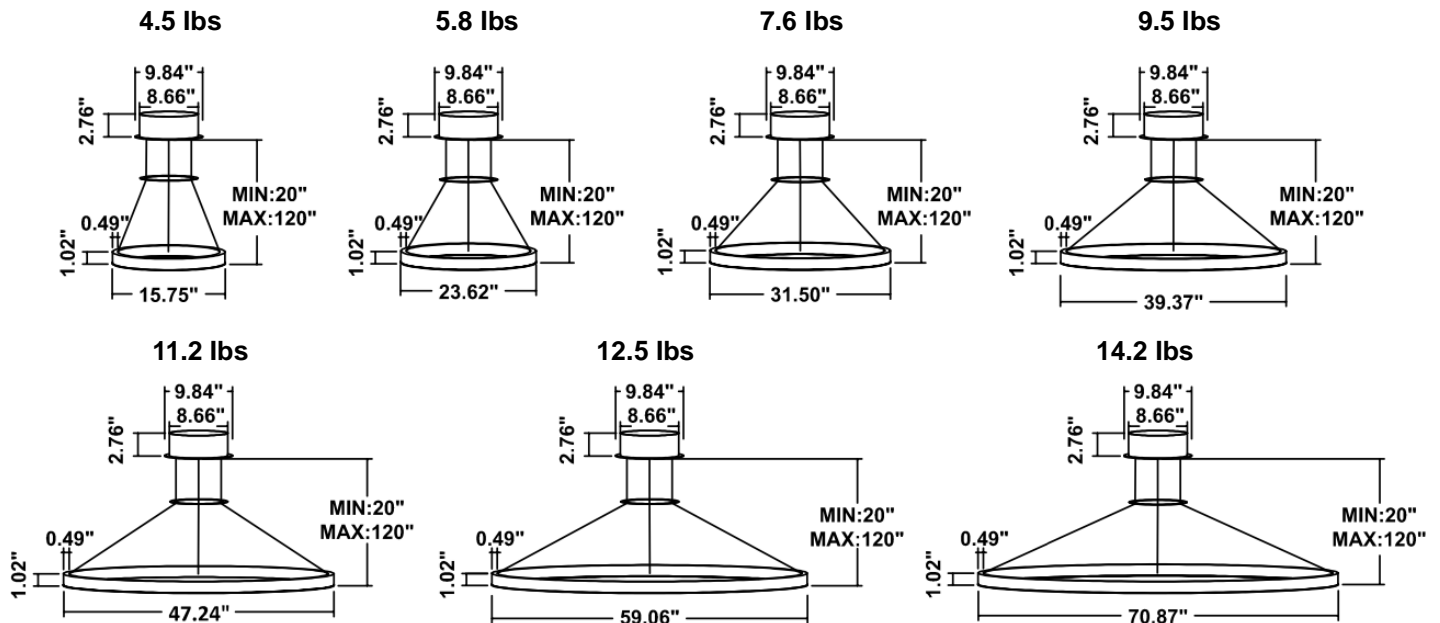


**SB-D101C**

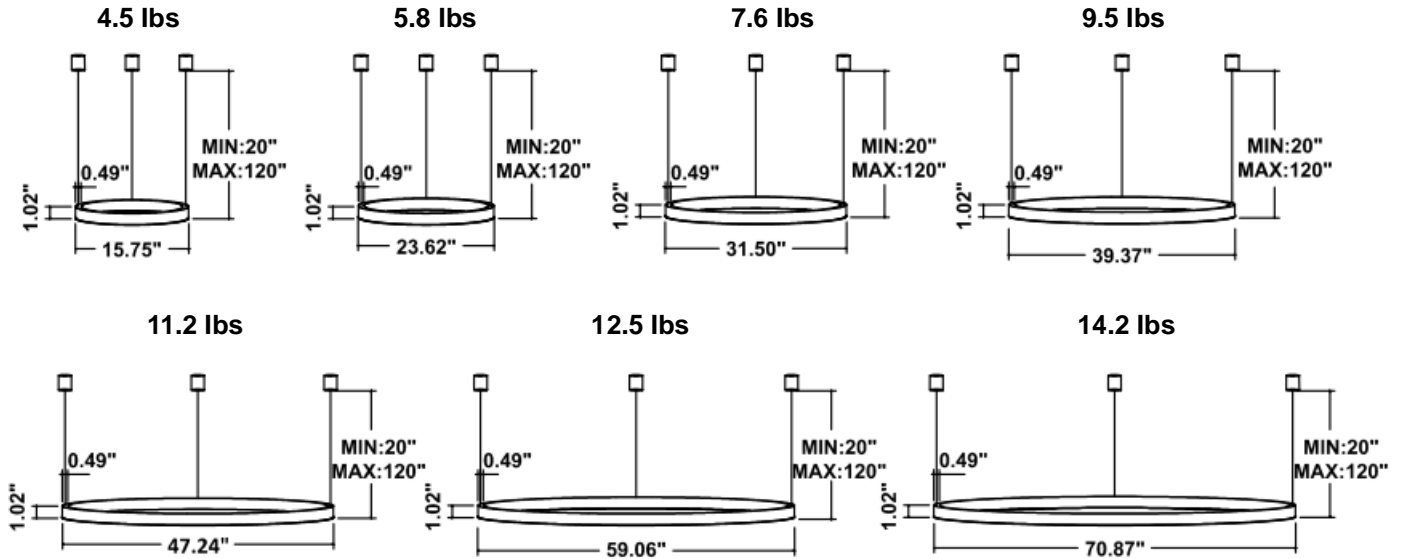

**PHOTOMETRIC: Direct Illumination**


**SB-D101A20WSZ 15.75" 20W @ 4000K**

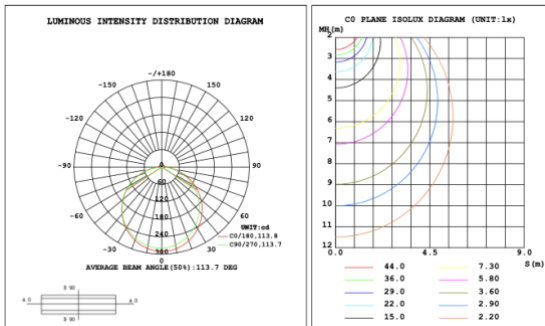




Flux out: 583.3 lm

Height	Eavg, Emax	Angle: 111.01deg	Diameter
1m	84.47, 290.41x		291.08cm
2m	21.12, 72.601x		582.15cm
3m	9.386, 32.271x		873.23cm
4m	5.279, 18.151x		1164.30cm
5m	3.379, 11.621x		1455.38cm
6m	2.346, 8.0671x		1746.46cm
7m	1.724, 5.9261x		2037.53cm
8m	1.320, 4.5371x		2328.61cm
9m	1.043, 3.5851x		2619.68cm
10m	0.8447, 2.9041x		2910.76cm




Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

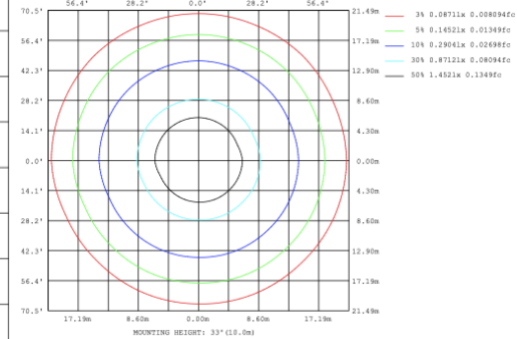

**SB-D101A30WSZ 23.62" 30W @ 4000K**

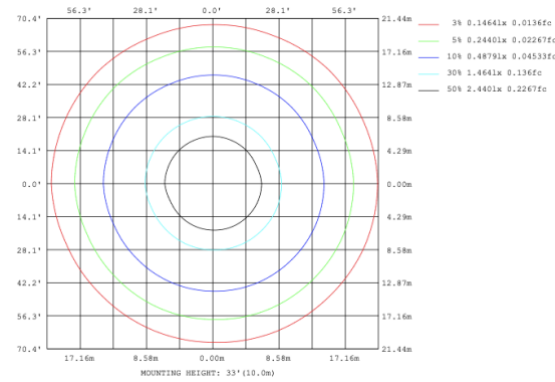
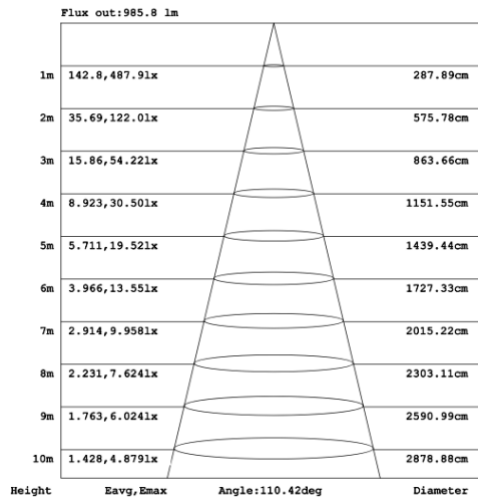
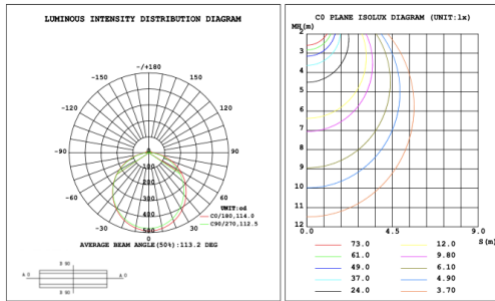


**SB-D101A40WSZ 31.50" 40W @ 4000K**

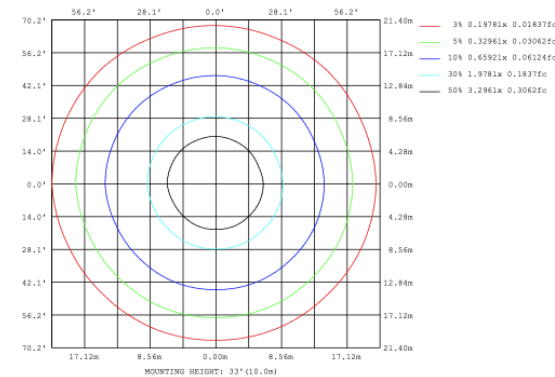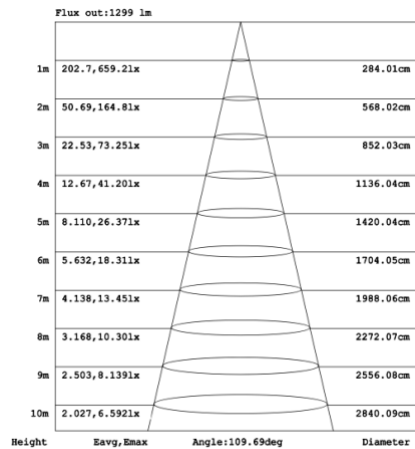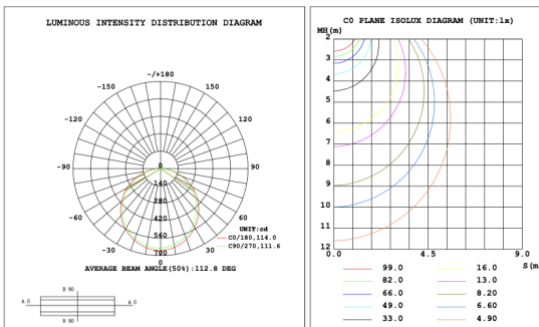



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

**SB-D101A50WSZ 39.37" 50W @ 4000K**

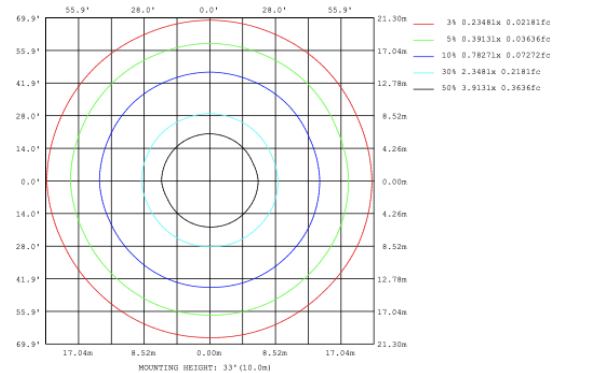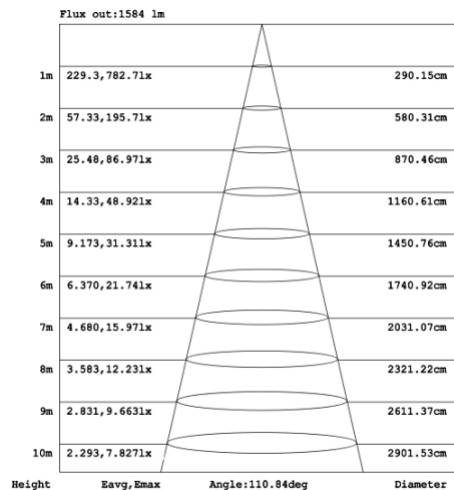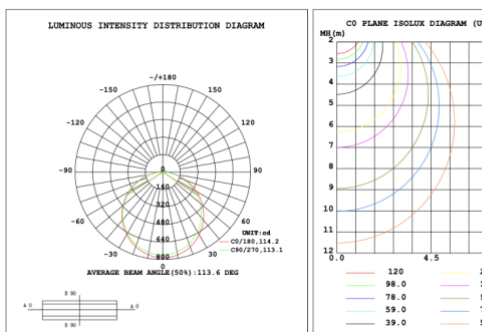


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



**SB-D101A60WSZ 47.24" 60W @ 4000K**

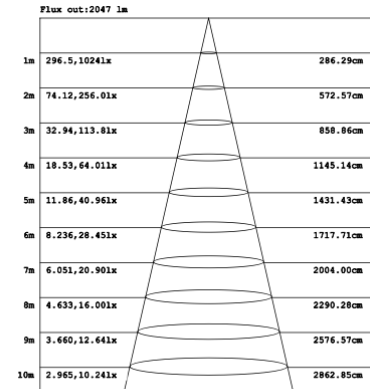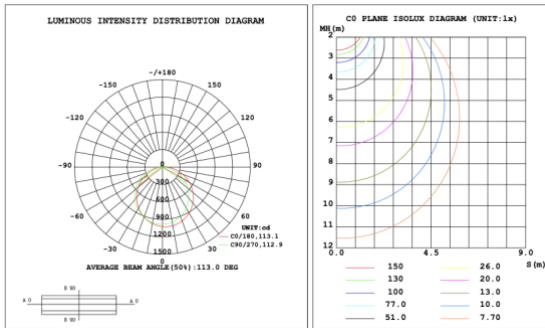


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

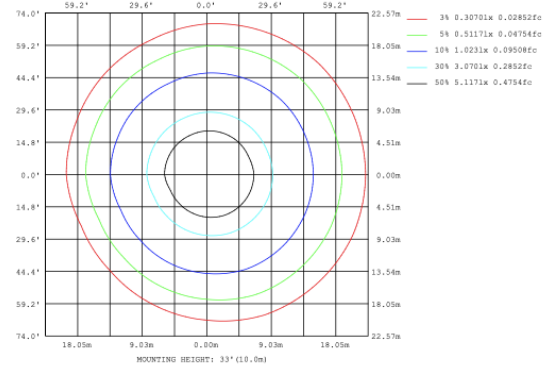



**SB-D101A70WSZ 59.06" 70W @ 4000K**

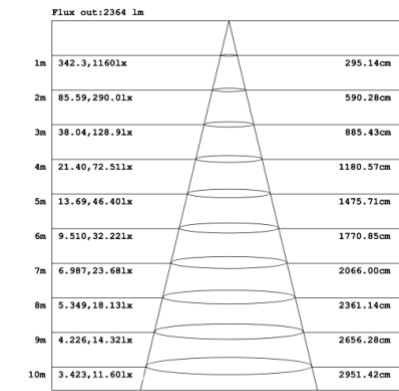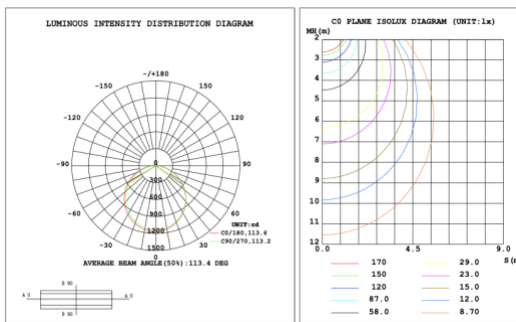

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

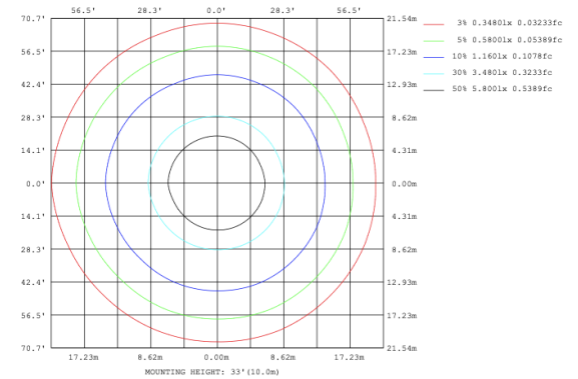

**SB-D101A80WSZ 70.87" 80W @ 4000K**

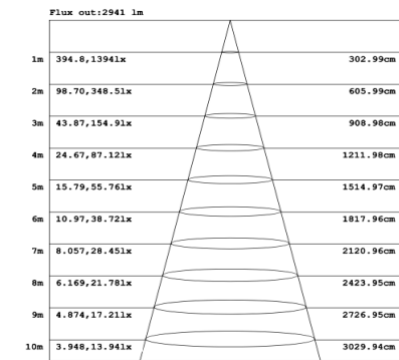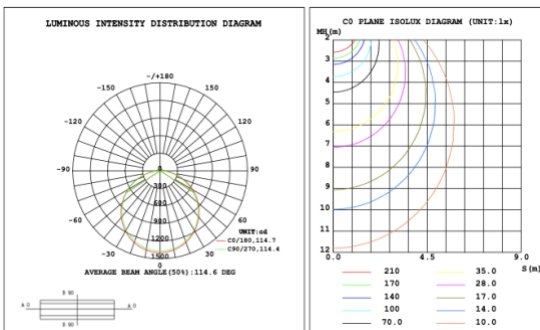

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

