



## Kimberley 4 Tier

### PRODUCT DESCRIPTION

The **Kimberley** circular design is made of extruded aluminum with either inside or outside lighting and lenses that beautifully blend the LEDs. Sizes ranging from 31.5" to 70.87". Suspension height adjustable, offering over 6,500 custom powder coated colors, ships assembled.

### FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination inside or outside the profile.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- Fixture lumens per watt ratio up to 70 LPW for illumination outside, 69 LPW for illumination inside.

### SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location.
- Gloss White, Black Jack, Platinum Silver and Oil bronze color finish as standard, 6,500 custom colors are available.
- Built in color temperature selectable. Choose from 2700K/3500K/4000K; 3000K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

### PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- [CCT Selector Switch](#)

**MODEL INFORMATION:**

**Example: SB-S04A220WSB**

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls ( don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-S04A	*220W = 31.5"+39.37"+47.28"+59.06"	*S=3000K/3500K/4000K Color Select by internal CCT	*Blank=1-10V dimming	*B=Black Jack	*Blank=10' feet 120" (Standard)
SB-S04B	250W = 39.37"+47.28"+59.06"+70.87"	Color Selector, 4000K factory color default set, CRI 90	L=ELV / Triac dimming	S=Platinum Silver	5'=5 feet 60"
SB-S04C					
SB-S04D					
<b>Request price for other size, Kelvin temp, add tiers and change configuration.</b>		A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	W=Gloss White	15'=15 feet 180"
		T=3K-4K Tunable White control by remote/wall control	C=Dali	O=Oil Rubbed Bronze	20'=20 feet 240"
		R3= RGB+3000K	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	<b>Full Color Name or RAL number for Custom Colors, select from <a href="#">Color Collections</a></b>	25'=25 feet 300"
		R4=RGB+4000K (standard)	<a href="#">See control options</a>		

**LUMEN OUTPUT**

Model Number	Size	Wattage	Kevin Temp field selectable	Lumen
SB-S04A/D	31.5"+39.37"+47.28"+59.06"	220W	2700K/3500K/3500K 3000K/3500K/4000K	13699 lm
	39.37"+47.28"+59.06"+70.87"	250W	2700K/3500K/3500K 3000K/3500K/4000K	15881 lm
SB-S04B	31.5"+39.37"+47.28"+59.06"	220W	2700K/3500K/3500K 3000K/3500K/4000K	14333 lm
	39.37"+47.28"+59.06"+70.87"	250W	2700K/3500K/3500K 3000K/3500K/4000K	17058 lm
SB-S04C	31.5"+39.37"+47.28"+59.06"	220W	2700K/3500K/3500K 3000K/3500K/4000K	13707 lm
	39.37"+47.28"+59.06"+70.87"	250W	2700K/3500K/3500K 3000K/3500K/4000K	16517 lm


## STANDARD COLOR FINISHES



In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample or any RAL finish. Add texture and originality to create a perfect match.

## EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

## RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

### Get Smart


Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

**DIMENSIONS & WEIGHTS:** Canopy Size for ZigBee & DMX: 15.75" x 2.76"



**SB-S04A**

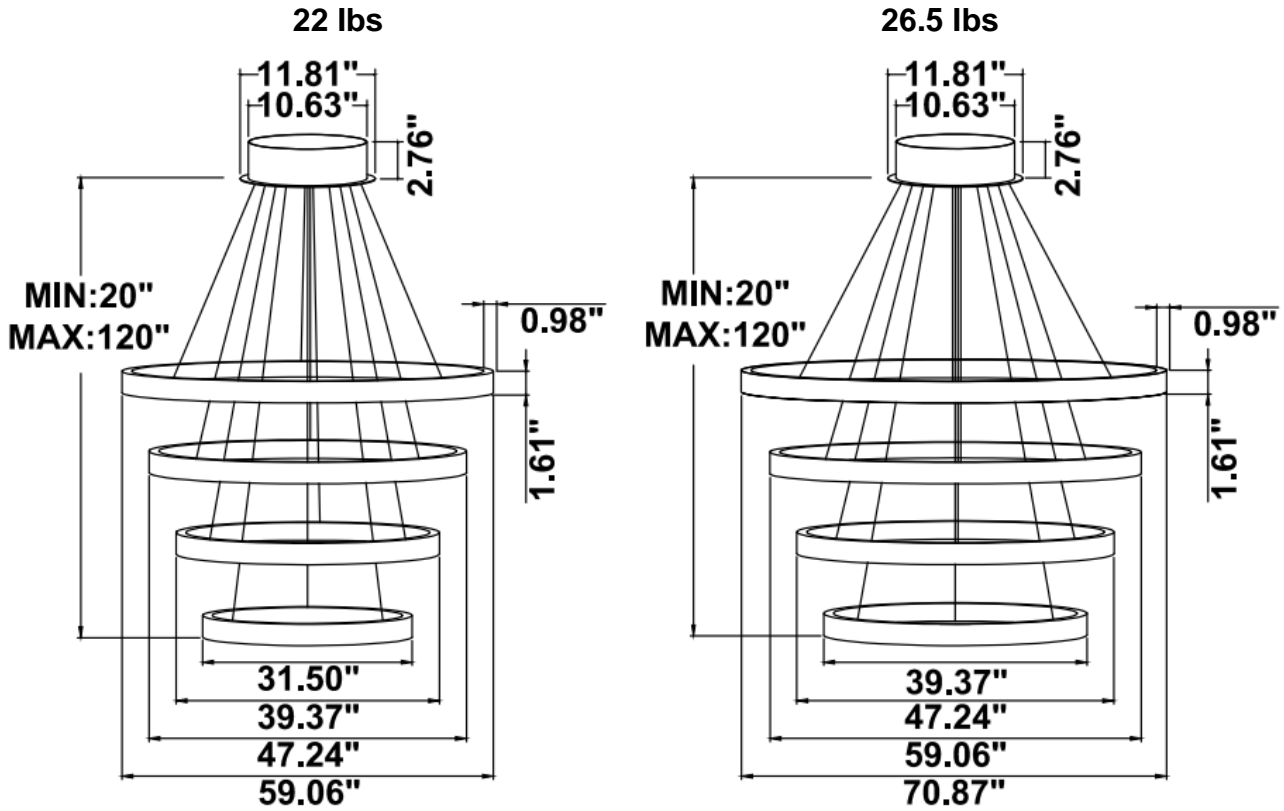



**SB-S04B**

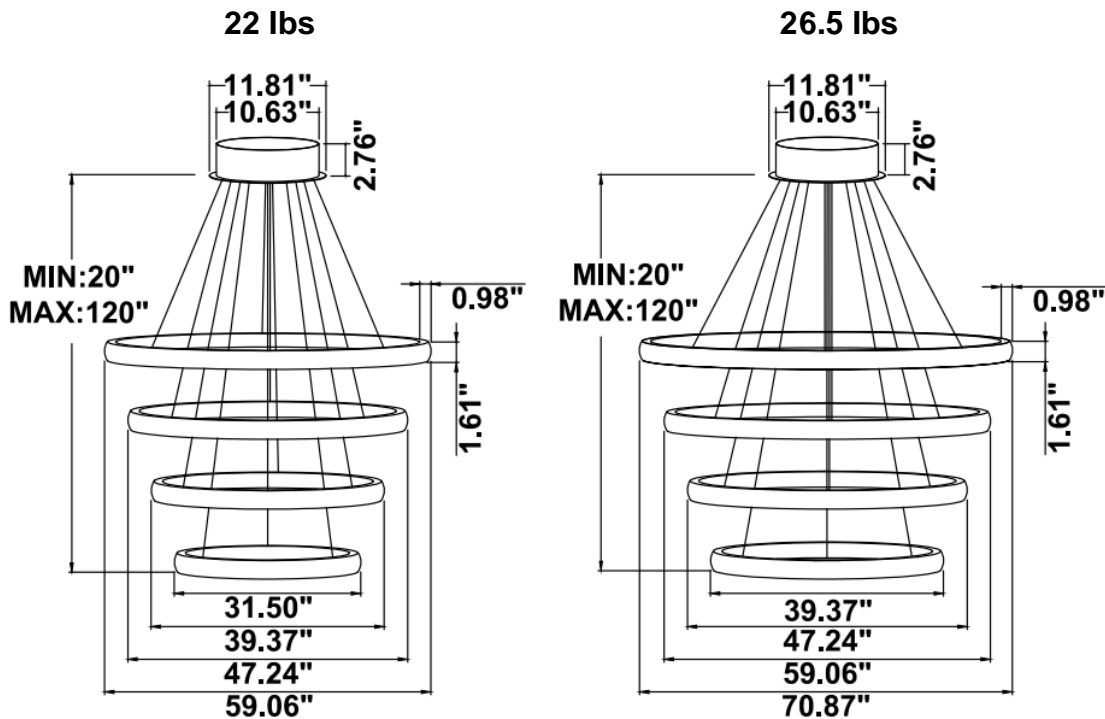

**SB-S04C**



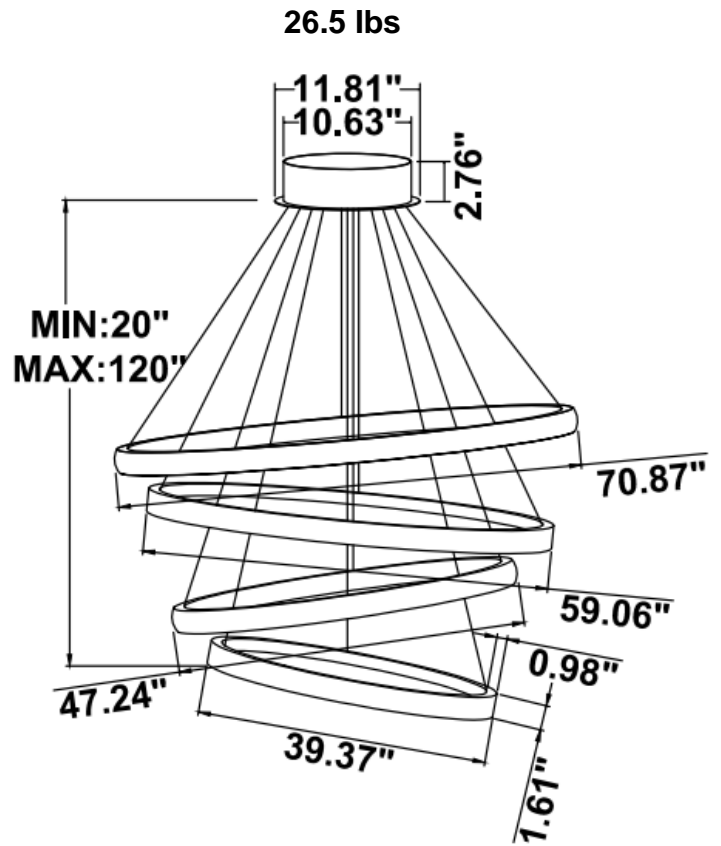
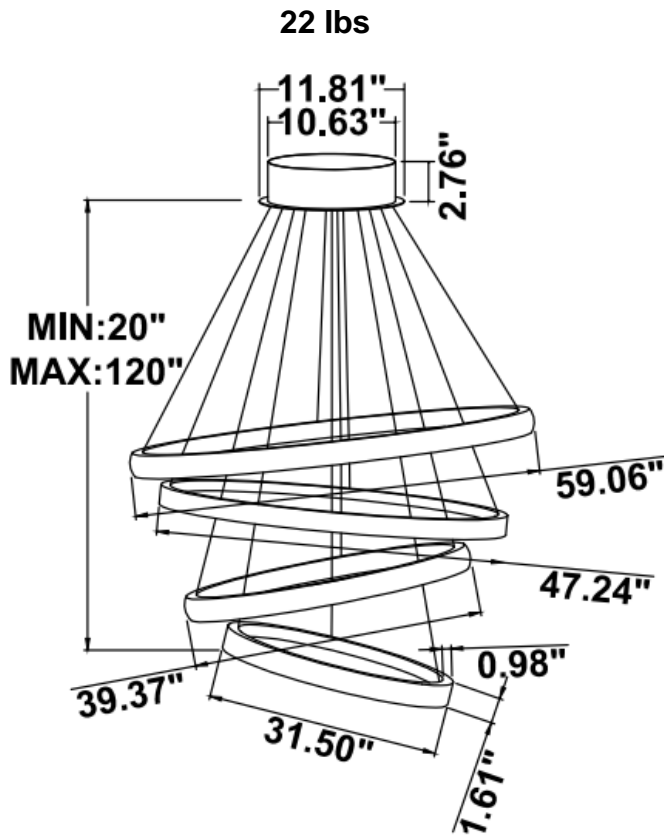


**SB-S04D**

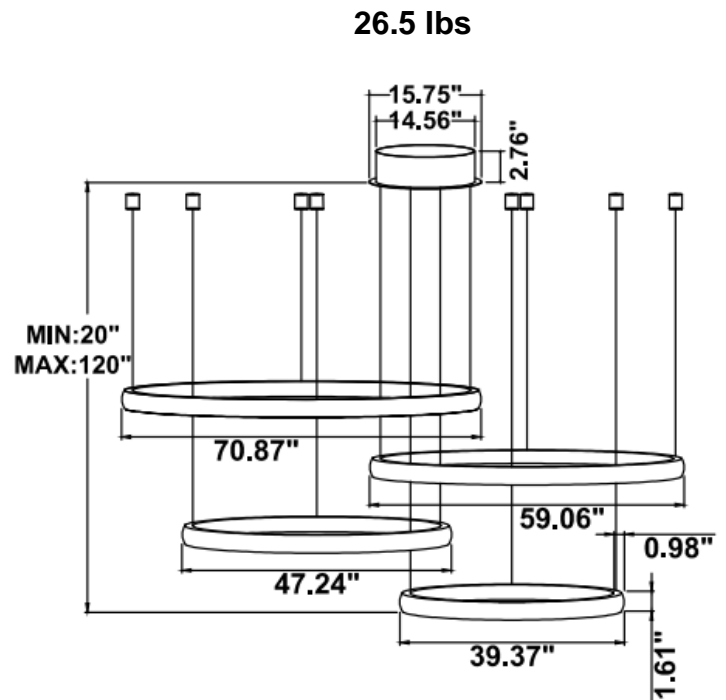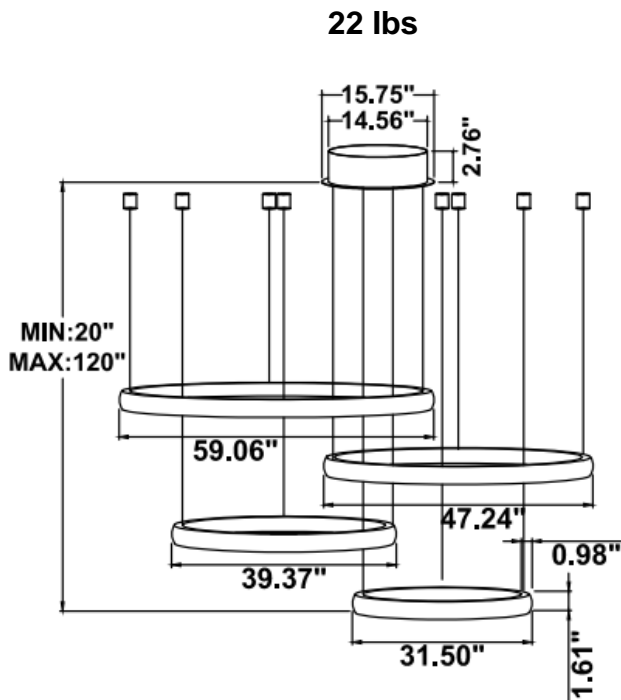





**PHOTOMETRIC: Illumination outside the profile, light inside**

**SB-S01A40WZ 31.50" 40W @ 4000K**

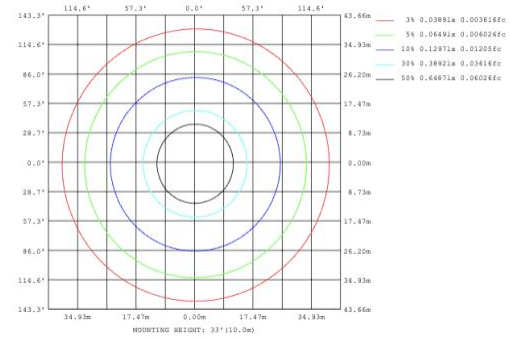
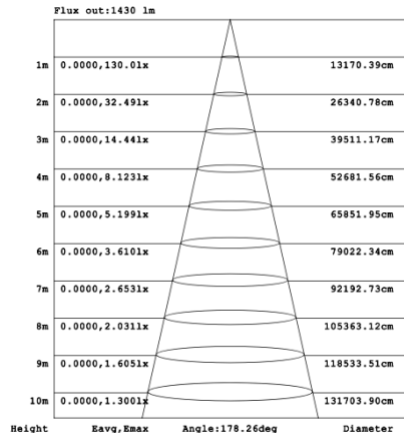
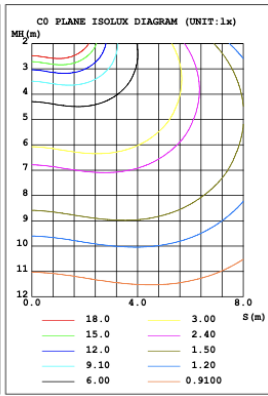
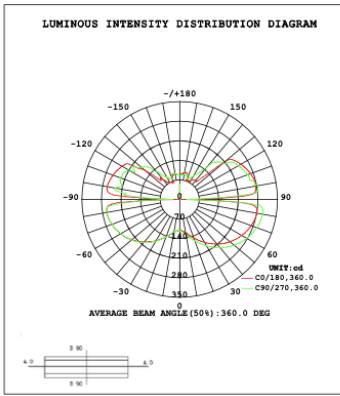


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



**SB-S01A50WZ 39.37" 50W @ 4000K**

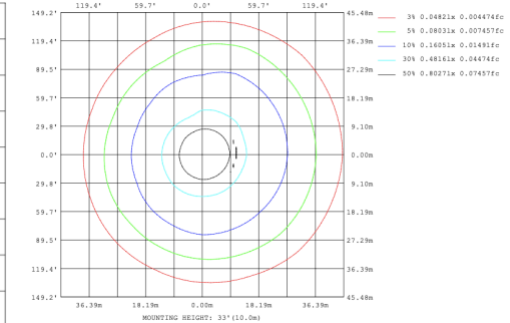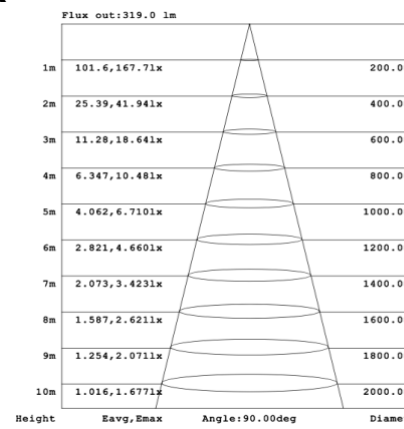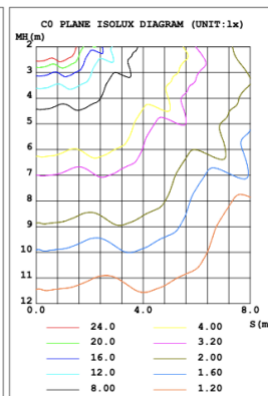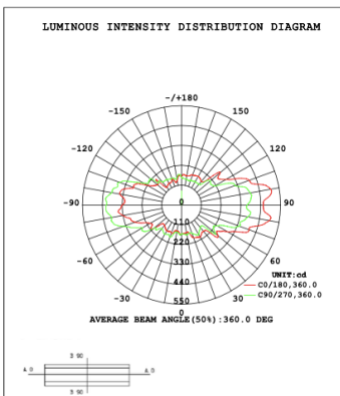

**SB-S01A60WZ 47.24" 60W @ 4000K**

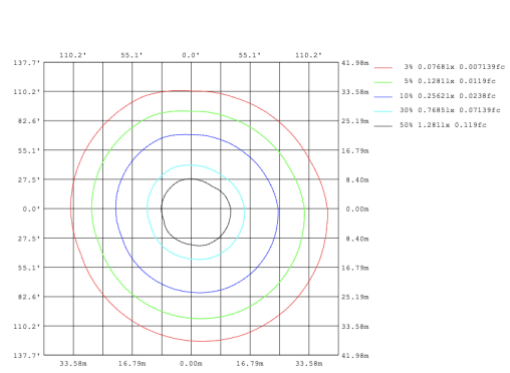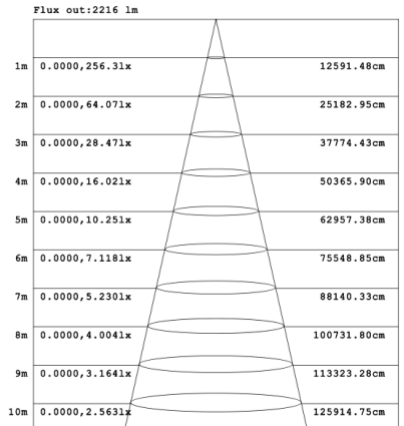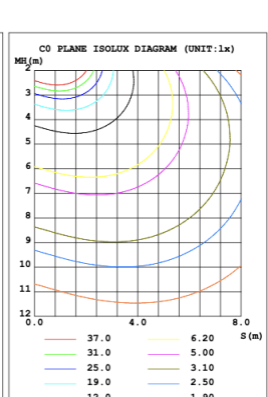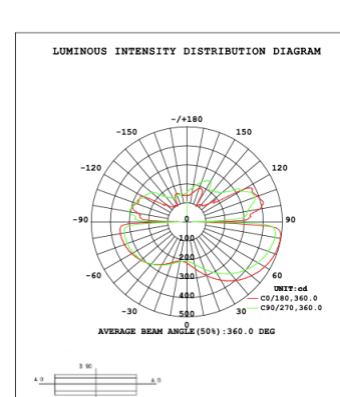


**SB-S01A70WZ 59.06" 70W @ 4000K**

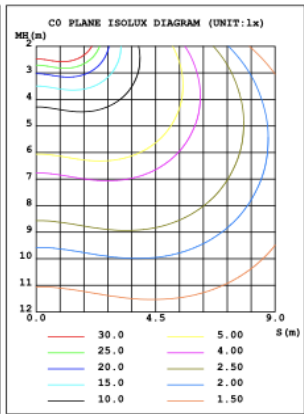
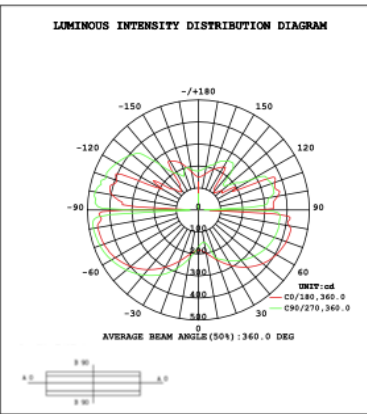


Flux out:538.9 lm

Height	Eavg, Emax	Angle:90.00deg	Diameter
1m	171.5, 235.6lx		200.00cm
2m	42.88, 58.91lx		400.00cm
3m	19.06, 26.18lx		600.00cm
4m	10.72, 14.73lx		800.00cm
5m	6.861, 9.426lx		1000.00cm
6m	4.765, 6.546lx		1200.00cm
7m	3.501, 4.809lx		1400.00cm
8m	2.680, 3.682lx		1600.00cm
9m	2.118, 2.909lx		1800.00cm
10m	1.715, 2.356lx		2000.00cm

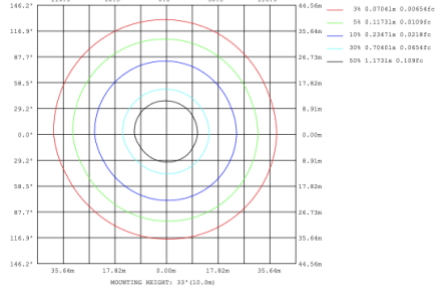


**SB-S01A80WZ 70.87" 80W @ 4000K**

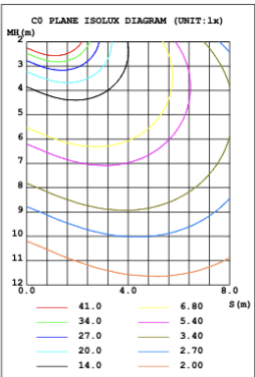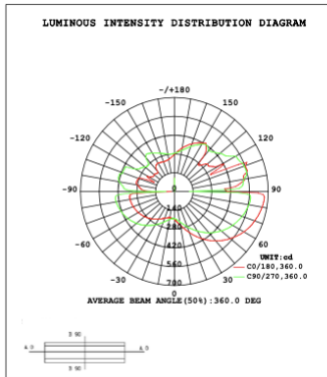



Flux out:318.7 lm

Height	Eavg, Emax	Angle:68.36deg	Diameter
1m	206.9, 271.4lx		135.83cm
2m	51.73, 67.84lx		271.66cm
3m	22.99, 30.15lx		407.49cm
4m	12.93, 16.96lx		543.32cm
5m	8.278, 10.85lx		679.15cm
6m	5.748, 7.538lx		814.98cm
7m	4.223, 5.538lx		950.81cm
8m	3.233, 4.240lx		1086.64cm
9m	2.555, 3.350lx		1222.47cm
10m	2.069, 2.714lx		1358.29cm

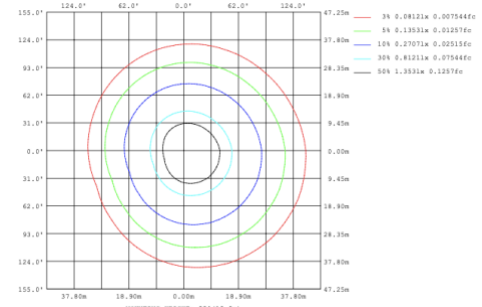


**Illumination inside the profile, light outside**

**SB-S01B40WZ 31.50" 40W @ 4000K**


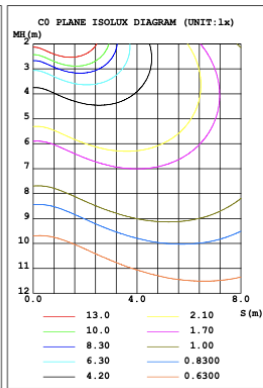
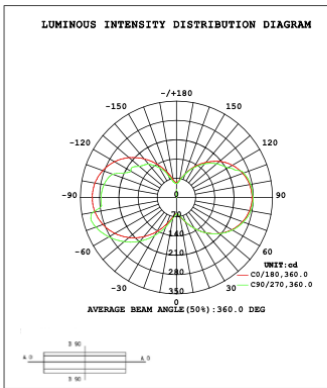


Flux out:259.3 lm




Height	Eavg, Emax	Angle:90.00deg	Diameter
1m	82.53, 104.7lx		200.00cm
2m	20.63, 26.19lx		400.00cm
3m	9.170, 11.64lx		600.00cm
4m	5.158, 6.546lx		800.00cm
5m	3.301, 4.190lx		1000.00cm
6m	2.293, 2.909lx		1200.00cm
7m	1.684, 2.138lx		1400.00cm
8m	1.290, 1.637lx		1600.00cm
9m	1.019, 1.293lx		1800.00cm
10m	0.8253, 1.047lx		2000.00cm

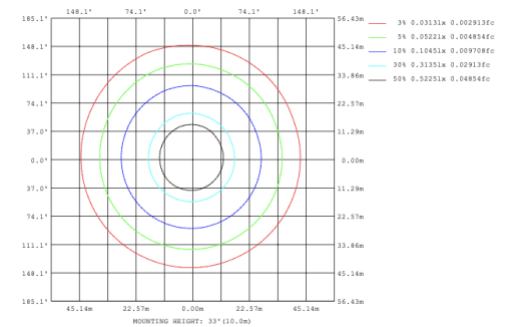

### SB-S01B50WZ 39.37" 50W @ 4000K


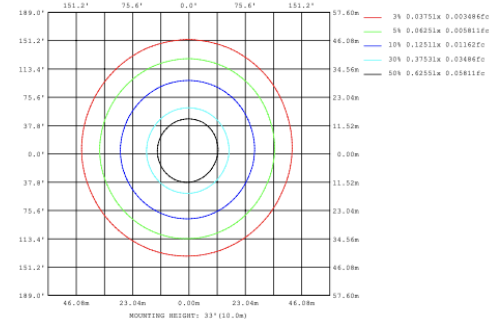
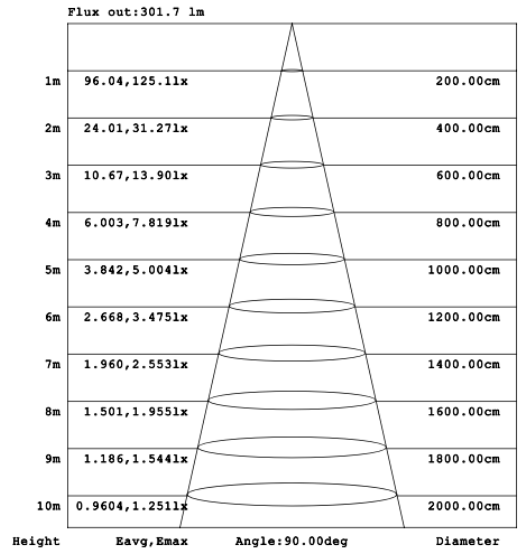
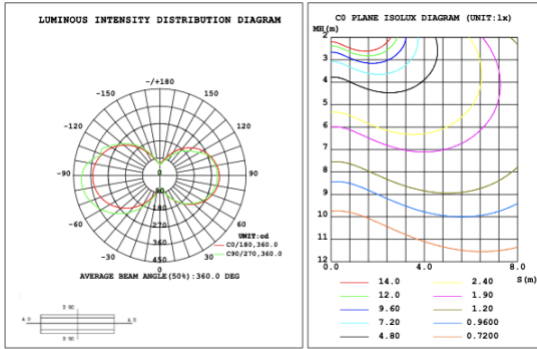


### SB-S01B60WZ 47.24" 60W @ 4000K

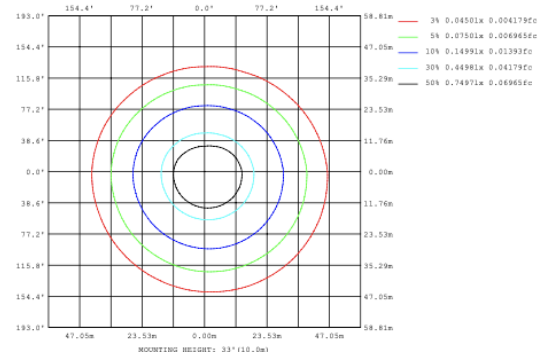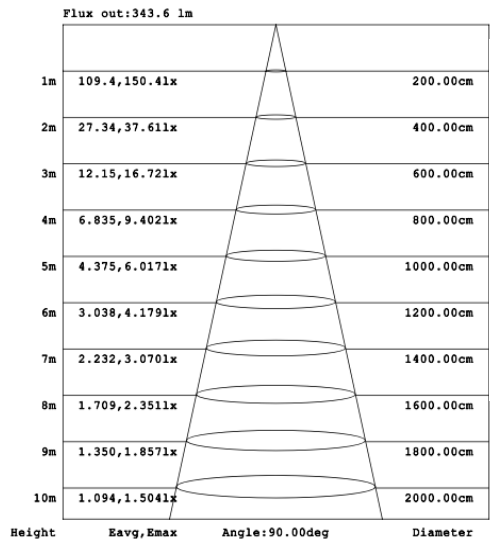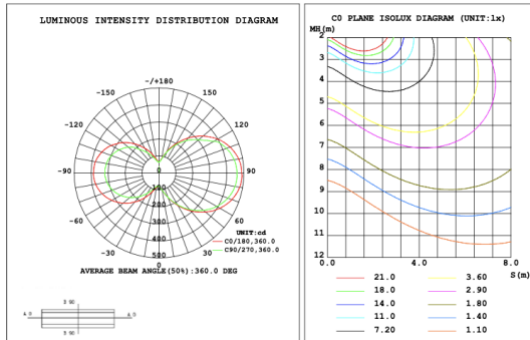



**SB-S01B70WZ 59.06" 70W @ 4000K**

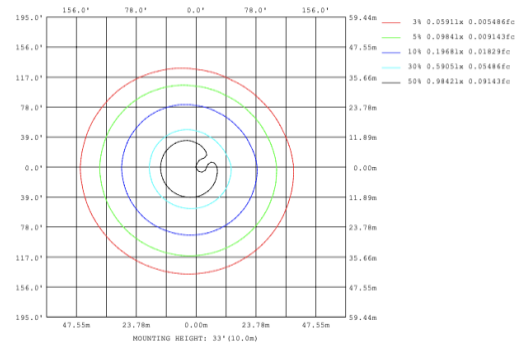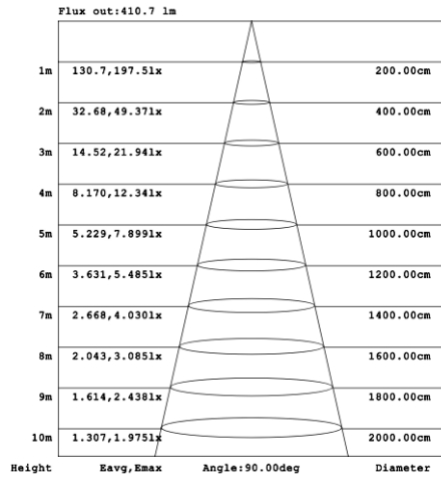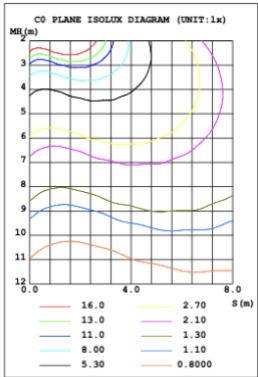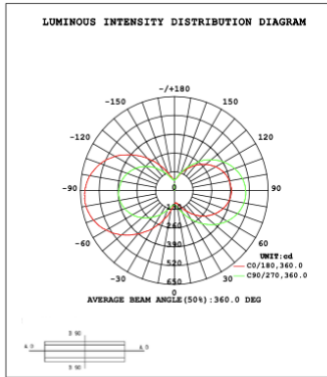

**SB-S01B80WZ 70.87" 80W @ 4000K**

