





SB-S05A

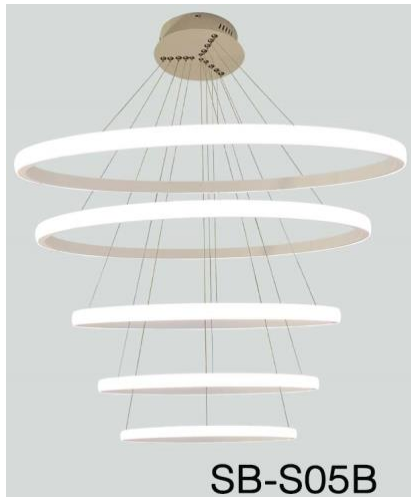

SB-S05B

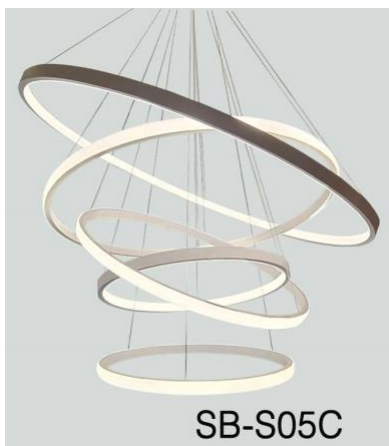

SB-S05C

## Kimberley 5 Tier

### PRODUCT DESCRIPTION

The **Kimberley** circular design is made of extruded aluminum with either inside or outside lighting and lenses that beautifully blend the LEDs. Sizes ranging from 31.5" to 70.87". Suspension height adjustable, offering over 6,500 custom powder coated colors, ships assembled.

### FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination inside or outside the profile.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- Fixture lumens per watt ratio up to 70 LPW for illumination outside, 69 LPW for illumination inside.

### SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location.
- Gloss White, Black Jack, Platinum Silver and Oil bronze color finish as standard, 6,500 custom colors are available.
- Built in color temperature selectable. Choose from 2700K/3500K/4000K; 3000K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

### PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- [CCT Selector Switch](#)

**MODEL INFORMATION:**

**Example: SB-S05A300WSB**

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls ( don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-S05A	*300W=31.5"+39.37"+47.28"+59.06"+70.87"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming	*B=Black Jack	*Blank=10' feet 120" (Standard)
SB-S05B		A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	L=ELV / Triac dimming	S=Platinum Silver	5'=5 feet 60"
SB-S05C		T=3K-4K Tunable White control by remote/wall control	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	W=Gloss White	15'=15 feet 180"
<b>Request price for other size, Kelvin temp, add tiers and change configuration.</b>		R3= RGB+3000K	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	O=Oil Rubbed Bronze	20'=20 feet 240"
		R4=RGB+4000K (standard)	<a href="#">See control options</a>	<b>Full Color Name or RAL number for Custom Colors, select from <a href="#">Color Collections</a></b>	25'=25 feet 300"

**LUMEN OUTPUT**

Model Number	Size	Wattage	Kevin Temp field selectable	Lumen
SB-S05A	31.5"+39.37"+47.28"+59.06"+70.87"	300W	2700K/3500K/3500K 3000K/3500K/4000K	18450lm
SB-S05B	31.5"+39.37"+47.28"+59.06"+70.87"	300W	2700K/3500K/3500K 3000K/3500K/4000K	19830 lm
SB-S05C	31.5"+39.37"+47.28"+59.06"+70.87"	300W	2700K/3500K/3500K 3000K/3500K/4000K	19289 lm


## STANDARD COLOR FINISHES



In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample or any RAL finish. Add texture and originality to create a perfect match.

## EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

## RGBW/TUNABLE WHITE SMART CONTROL

[SEE SPEC AND VIDEO](#)


### Get Smart

Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

**DIMENSIONS & WEIGHTS:** Canopy Size for ZigBee & DMX: 15.75" x 2.76"


**SB-S05A**

30.5 lbs

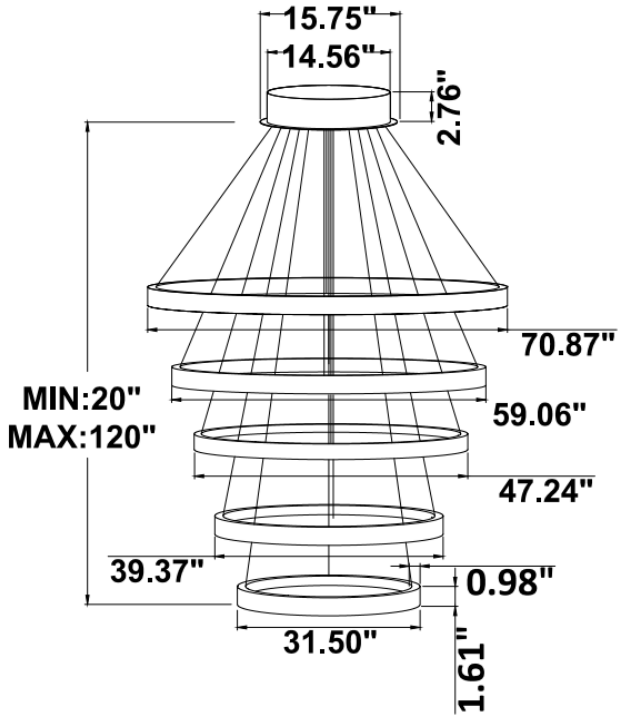


**SB-S05B**

30.5 lbs

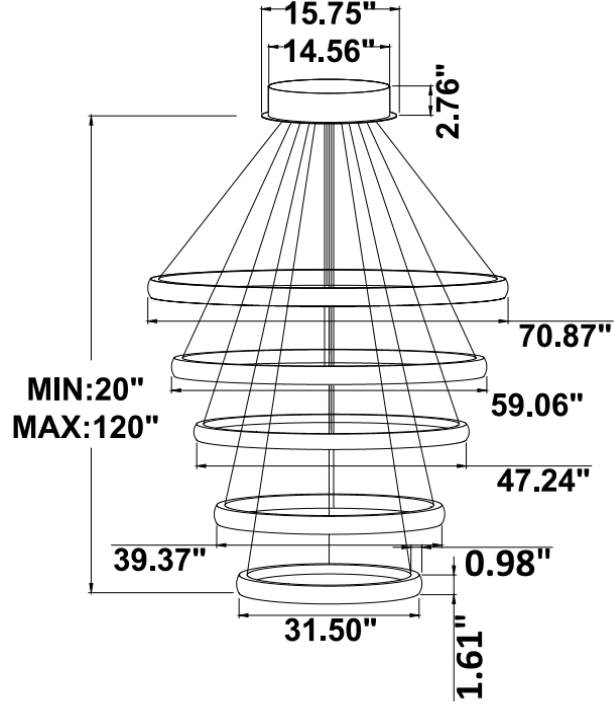





**SB-S05C**

30.5 lbs

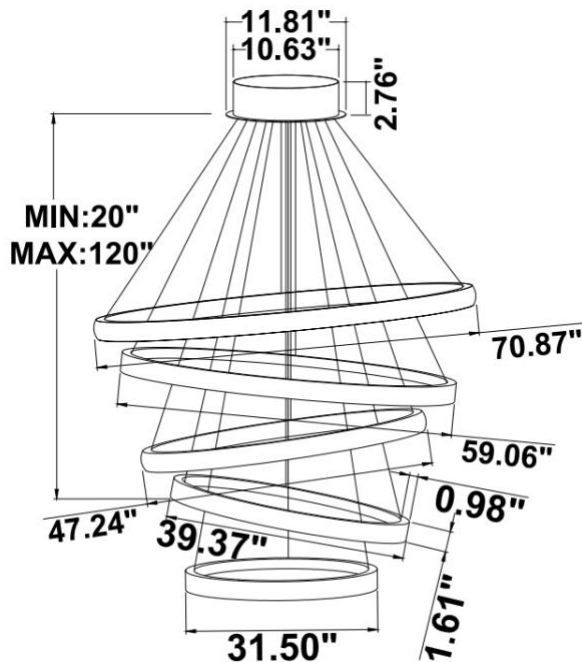





**PHOTOMETRIC: Illumination outside the profile, light inside**

**SB-S01A40WZ 31.50" 40W @ 4000K**

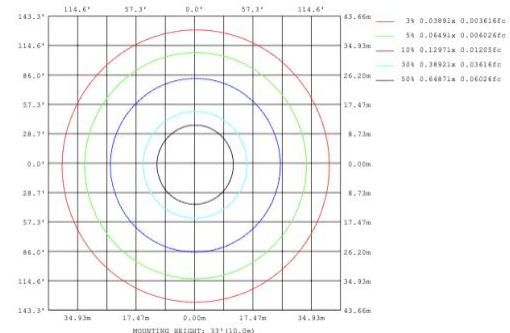
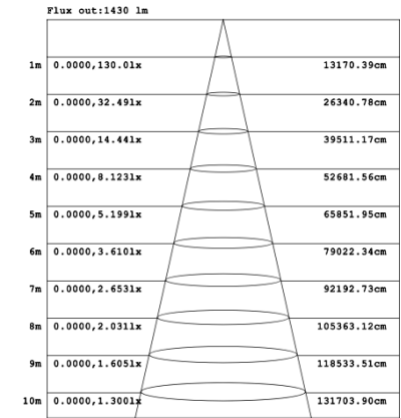
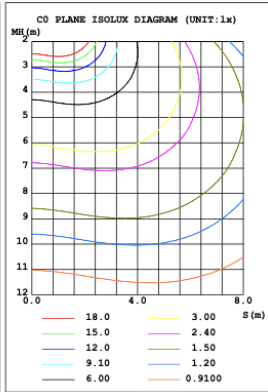
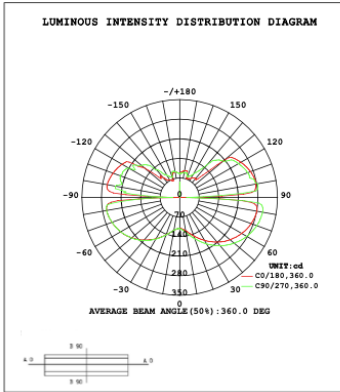


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

**SB-S01A50WZ 39.37" 50W @ 4000K**

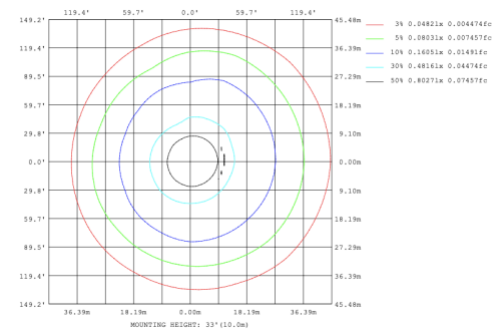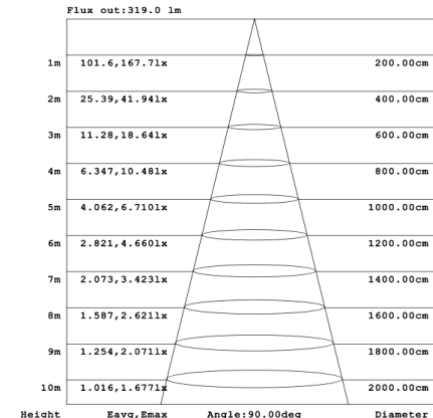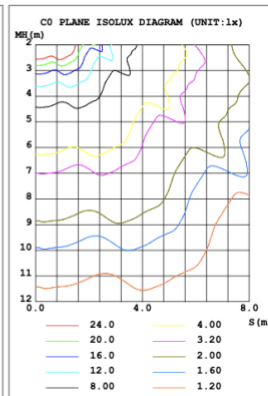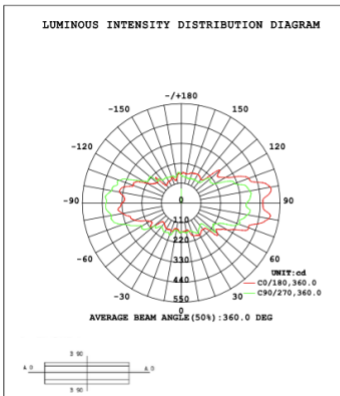


**SB-S01A60WZ 47.24" 60W @ 4000K**

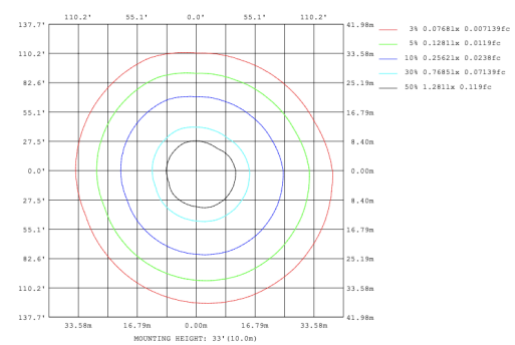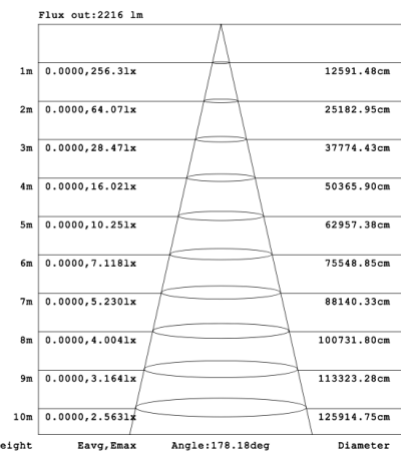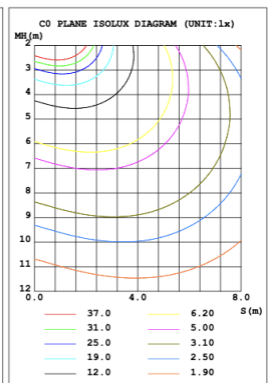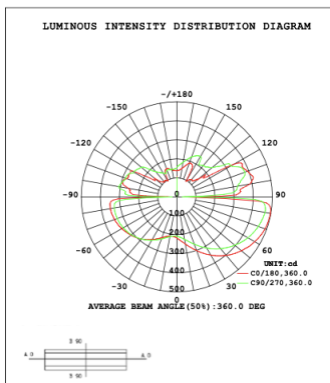




**SB-S01A70WZ 59.06" 70W @ 4000K**

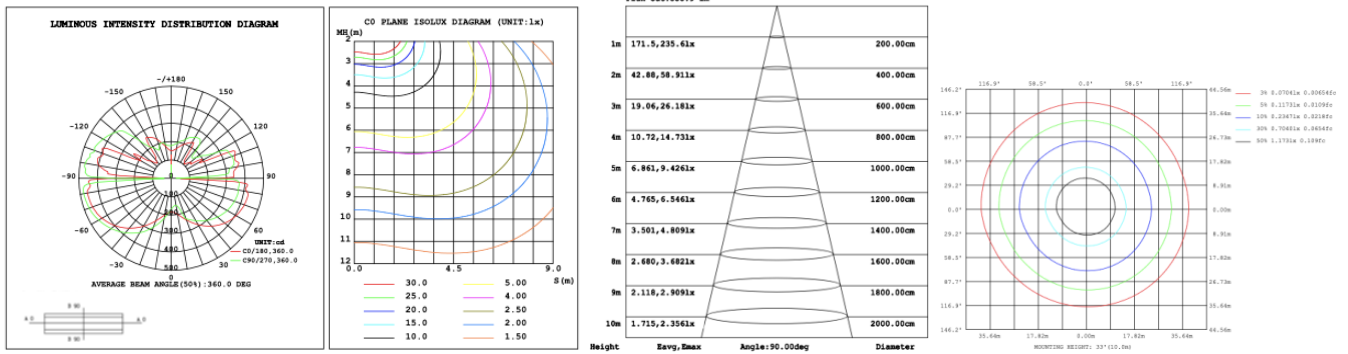


**SB-S01A80WZ 70.87" 80W @ 4000K**

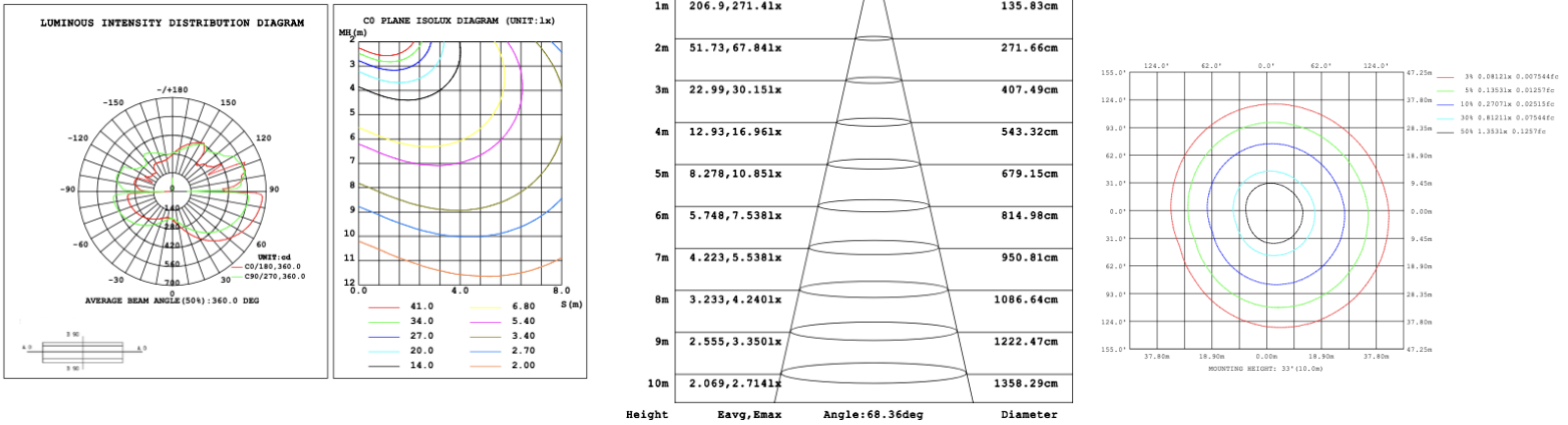


**Illumination inside the profile, light outside**

**SB-S01B40WZ 31.50" 40W @ 4000K**

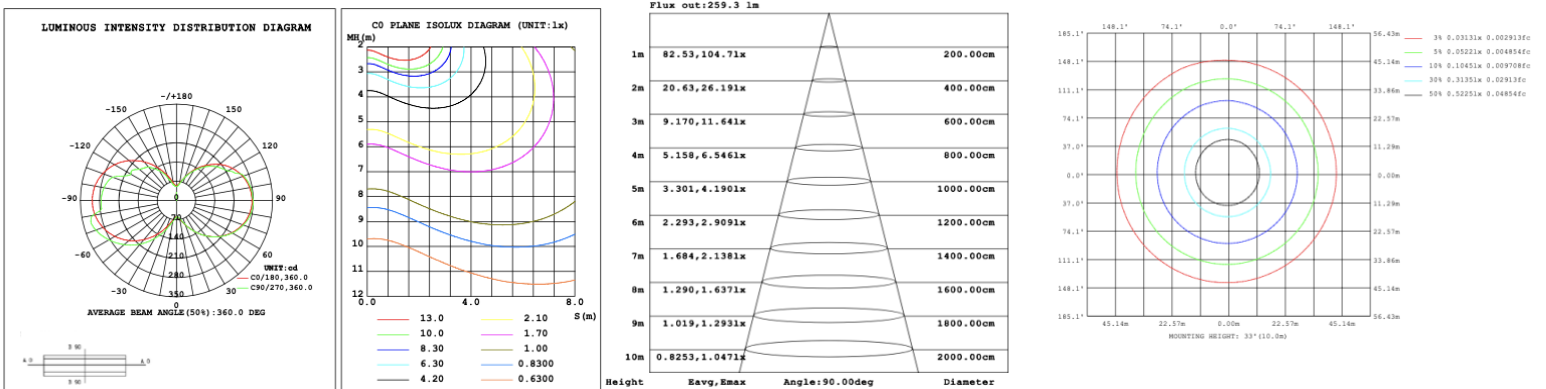


### SB-S01B50WZ 39.37" 50W @ 4000K

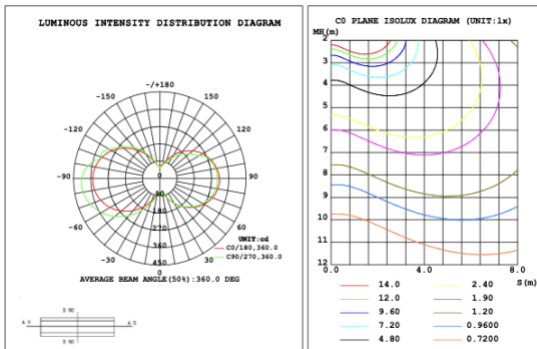


Flux out:301.7 lm

Height	Eavg, Emax	Angle:90.00deg	Diameter
1m	96.04,125.11x		200.00cm
2m	24.01,31.27lx		400.00cm
3m	10.67,13.90lx		600.00cm
4m	6.003,7.819lx		800.00cm
5m	3.842,5.004lx		1000.00cm
6m	2.668,3.475lx		1200.00cm
7m	1.960,2.553lx		1400.00cm
8m	1.501,1.955lx		1600.00cm
9m	1.186,1.544lx		1800.00cm
10m	0.9604,1.251lx		2000.00cm

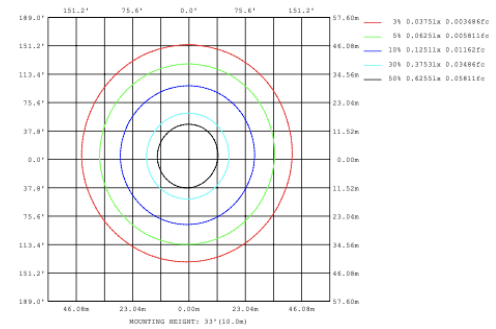


### SB-S01B60WZ 47.24" 60W @ 4000K



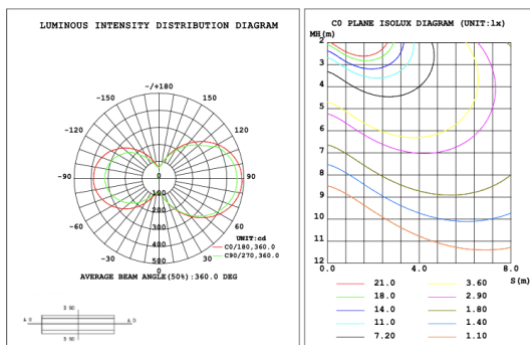


Flux out:343.6 lm

Height	Eavg, Emax	Angle:90.00deg	Diameter
1m	109.4,150.4lx		200.00cm
2m	27.34,37.61lx		400.00cm
3m	12.15,16.72lx		600.00cm
4m	6.835,9.402lx		800.00cm
5m	4.375,6.017lx		1000.00cm
6m	3.038,4.179lx		1200.00cm
7m	2.232,3.070lx		1400.00cm
8m	1.709,2.351lx		1600.00cm
9m	1.350,1.857lx		1800.00cm
10m	1.094,1.504lx		2000.00cm

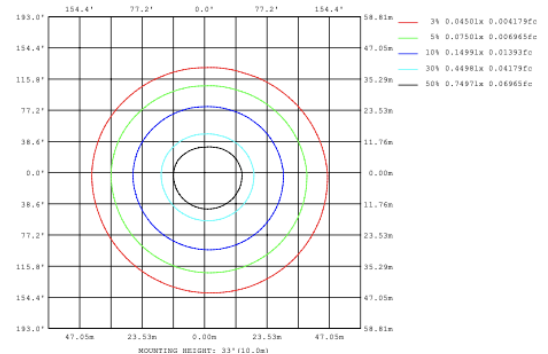

**SB-S01B70WZ 59.06" 70W @ 4000K**

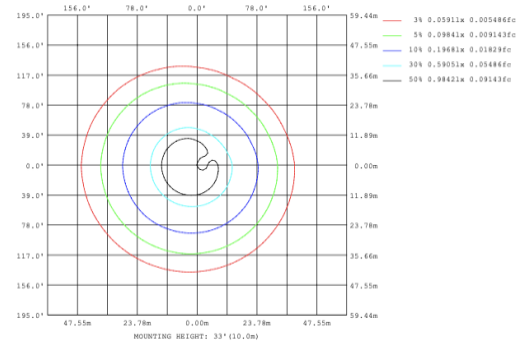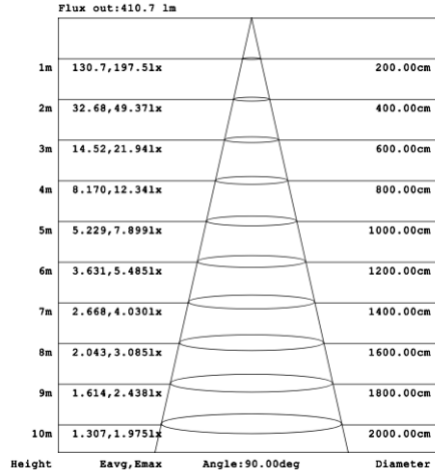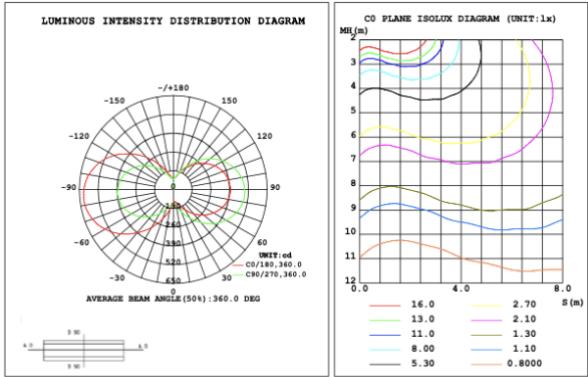

**SB-S01B80WZ 70.87" 80W @ 4000K**

