

Aprica-B

PRODUCT DESCRIPTION

The **Aprica** Globe Italian Luxury modern Crystals LED Chandelier. Great application for Hotel, Dining room, Living room and hotel lobby.



FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination inside the profile.
- Crystal, Stainless steel body, metal driver canopy.
- Fixture delivered lumens per watt ratio up to 53 LPW.

SPECIFICATIONS








- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location.
- Gloss White, Black Jack, Platinum Silver and Oil bronze color finish as standard, 6,500 custom colors are available.
- Built in color temperature selectable. Choose from 2700K/3500K/4000K ; 3000K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- [CCT Selector Switch](#)



CRYSTAL OPTIONS:

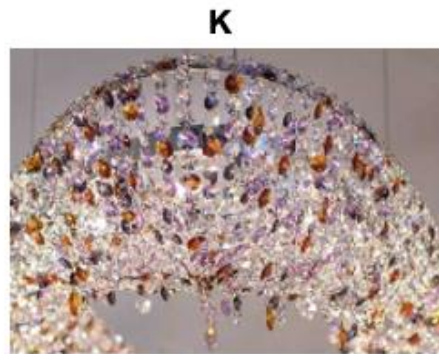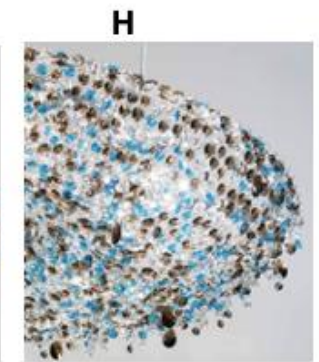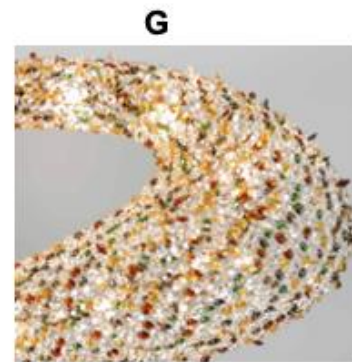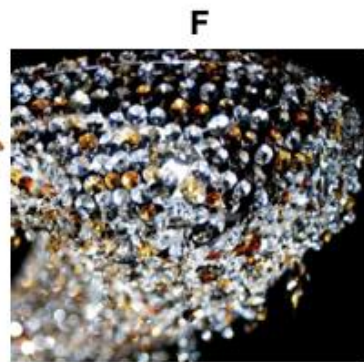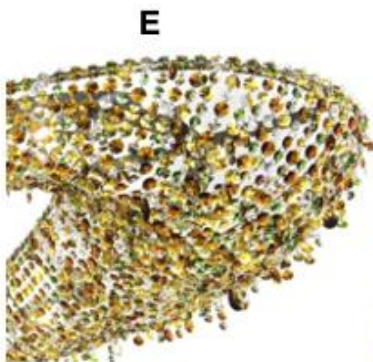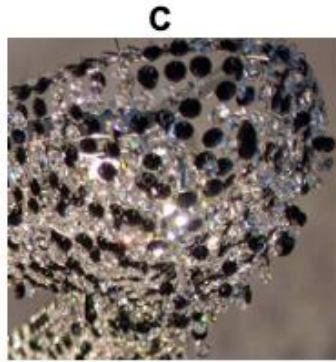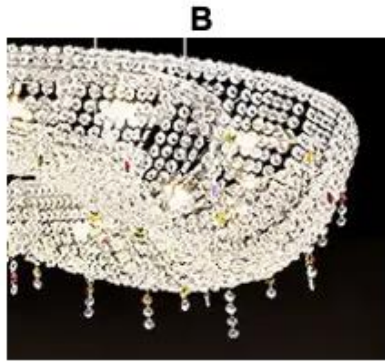

All Color



MODEL INFORMATION:

Example: SB-A401A30WSAA

Products Series	Wattage/Size	“E” Kelvin temp options (standard)	“W” Controls (don’t select this column if selected S or A)	“Z” Profile Finishes	Crystal color	“X” Aircraft Cable
*SB-A401A	*30W = 23.62”X6.69” 40W = 31.50”X6.69” 50W = 39.37”X6.69” 60W = 47.24”X6.69”	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming	*A=Anodized Gold (standard0	*A B C D E F G H I J K L M	*Blank=10’ feet 120”(Standard)
		A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	L=ELV / Triac dimming	C=Supper Chrome (standard)		5’=5 feet 60”
		T=3K-4K Tunable White control by remote/wall control	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	B=Black Jack		15’=15 feet 180”
		R3= RGB+3000K	C=Dali	S=Platinum Silver		20’=20 feet 240”
		R4=RGB+4000K (standard)	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	W=Gloss White	Other Color	25’=25 feet 300”
Request price for other Kelvin temp custom sizes			See control options	Full Color Name or RAL number for Custom Colors, select from Color Collections		30’=30 feet 360”

STANDARD COLOR FINISHES



ANODIZED GOLD



SUPER CHROME PLUS


In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample or any RAL finish. Add texture and originality to create a perfect match.

LUMEN OUTPUT

Model Number	Size	Wattage	Kevin Temp field Selectable	Delivered Lumen
SB-A401A	23.62"	30W	2700K/3500K/3500K 3000K/3500K/4000K	1590 lm
	31.50"	40W	2700K/3500K/3500K 3000K/3500K/4000K	2120 lm
	39.37"	50W	2700K/3500K/3500K 3000K/3500K/4000K	2650 lm
	47.24"	60W	2700K/3500K/3500K 3000K/3500K/4000K	3180 lm


DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"

SB-A401A

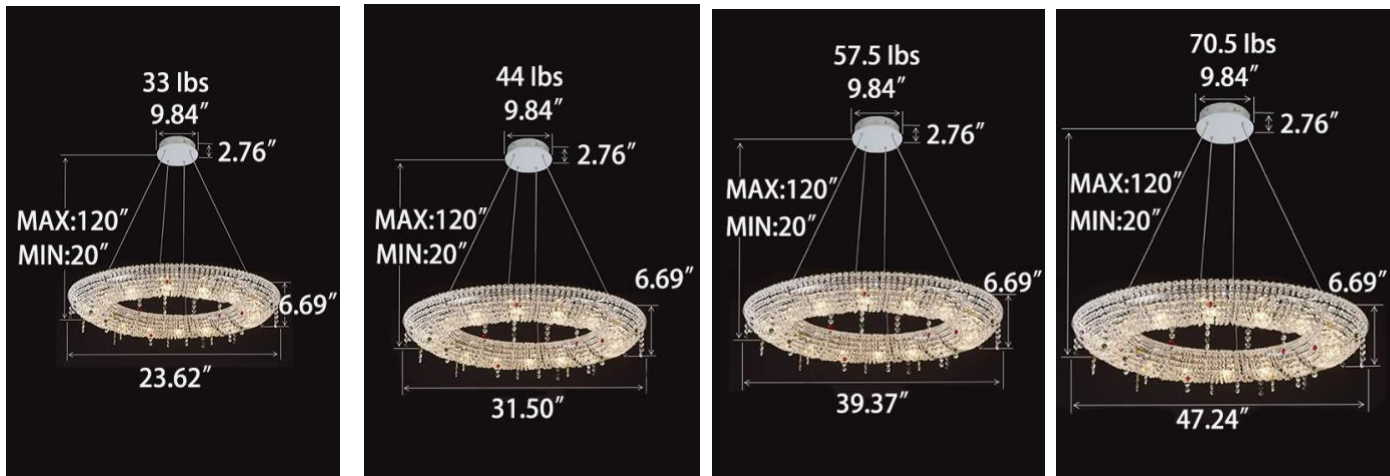

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes


RGBW/TUNABLE WHITE SMART CONTROL

[SEE SPEC AND VIDEO](#)


Get Smart

Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.


SB-A101A30WSZ 23.62" 30W @ 4000K

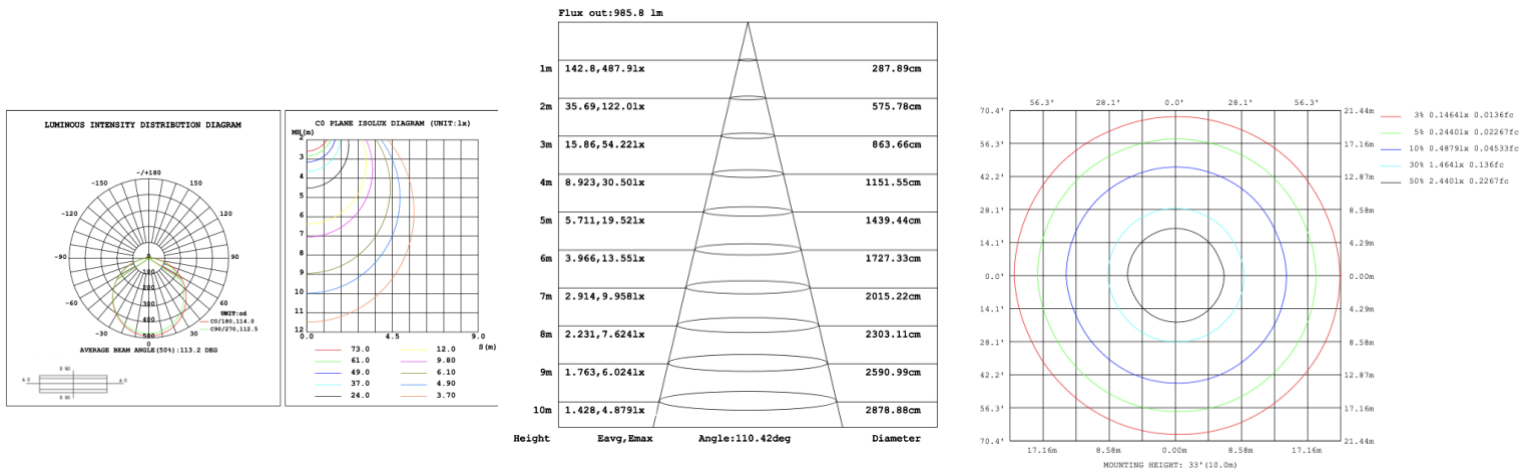

SB-A101A40WSZ 31.50" 40W @ 4000K

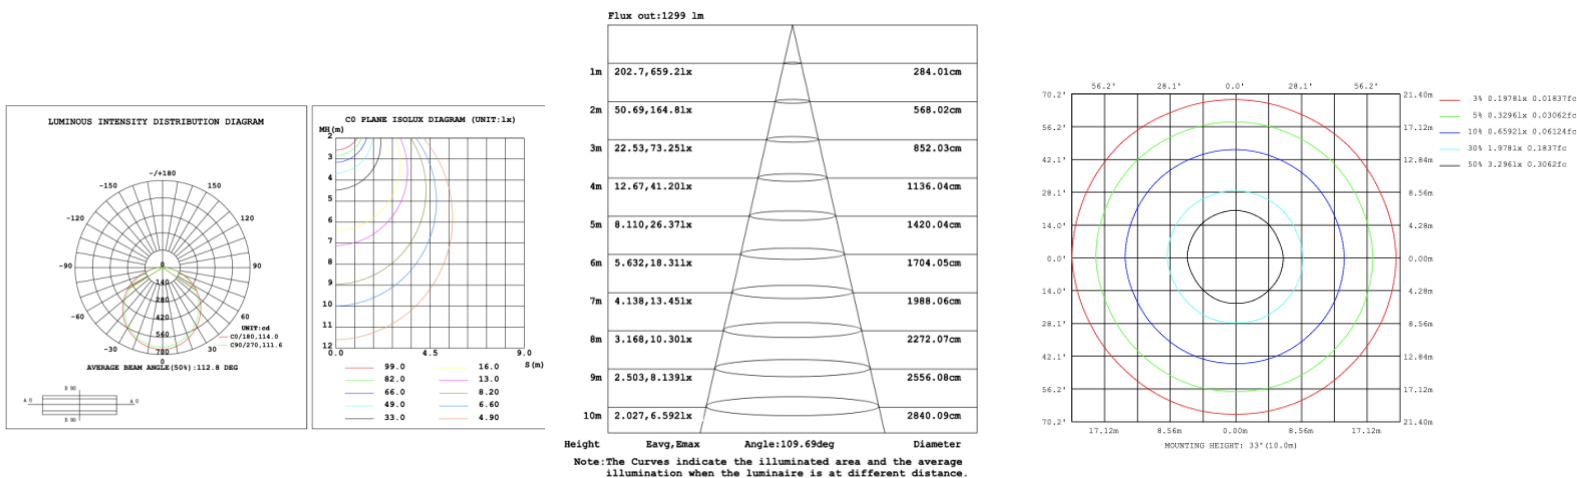


SB-A101A50WSZ 39.37" 50W @ 4000K

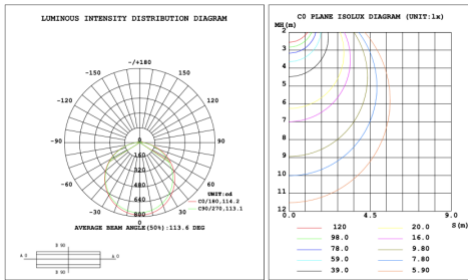


Flux out:1584 lm

Height	Eavg, Emax	Angle:110.84deg	Diameter
1m	229.3,782.7lx		290.15cm
2m	57.33,195.7lx		580.31cm
3m	25.48,86.97lx		870.46cm
4m	14.33,48.92lx		1160.61cm
5m	9.173,31.31lx		1450.76cm
6m	6.370,21.74lx		1740.92cm
7m	4.680,15.97lx		2031.07cm
8m	3.583,12.23lx		2321.22cm
9m	2.831,9.663lx		2611.37cm
10m	2.293,7.827lx		2901.53cm

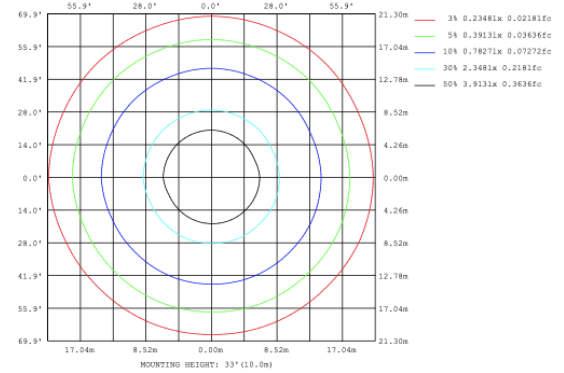


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

SB-A101A60WSZ 47.24" 60W @ 4000K

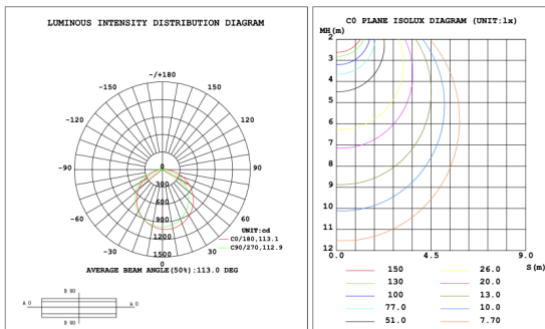

Flux out:2047 lm

Height	Eavg, Emax	Angle:110.12deg	Diameter
1m	296.5,1024lx		286.29cm
2m	74.12,256.0lx		572.57cm
3m	32.94,113.8lx		858.86cm
4m	18.53,64.01lx		1145.14cm
5m	11.86,40.96lx		1431.43cm
6m	8.236,28.45lx		1717.71cm
7m	6.051,20.90lx		2004.00cm
8m	4.633,16.00lx		2290.28cm
9m	3.660,12.64lx		2576.57cm
10m	2.965,10.24lx		2862.85cm

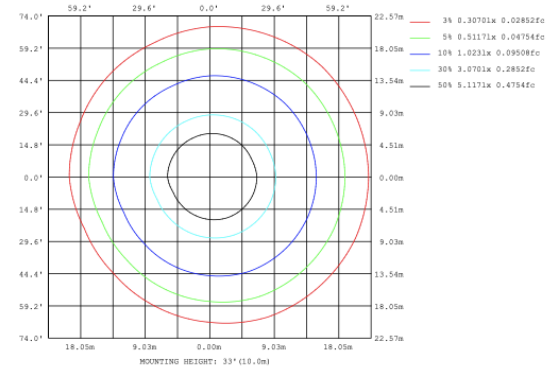

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.