

[View Sundance 1 tier on website](#)

[View Video](#)

[View application photos](#)

PRODUCT DESCRIPTION

The **Sundance** Modern Designer Decoration LED personality circular Chandelier Lighting brings a warm and inviting glow to any interior space. The inner LED light is shielded by outer Stainless steel plates that are split to emit light. The result is a beautiful and evenly diffused light that is perfect for any Living Room, Hotel Hall, Duplex Villa. Ships assembled.



FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination direct/indirect.
- Stainless steel housing up to 47.24".
- White frosted acrylic diffuser, Glare-free lens
- Fixture delivered lumens per watt ratio up to 80 LPW not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location.
- Gloss White, Black Jack, Platinum Silver and Oil bronze color finish as standard, 6,500 custom colors are available.
- Built in color temperature selectable. Choose from 2700K/3500K/4000K Or 3000K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch



RING FINISHES

A: Gold + Black



B: Black Jack



C: Chrome + Black



D: Bronze



E: Modern Brass



F: Vintage Platinum



G: Soft Gold



O: Oil Rubbed Bronze



COLOR FINISHES FOR CANOPY



GLOSS WHITE



PLATINUM SILVER



BLACK JACK



OIL RUBBED BRONZE

In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample or any RAL finish. Add texture and originality to create a perfect match.

LUMEN OUTPUT

Model Number	Size	Wattage	Kevin Temp field Selectable $\pm 500K$	Delivered Lumen $\pm 10\%$
SB-D401A	15.75"	20W	2700K/3500K/4000K or 3000K/3500K/4000K	1600 lm
	23.62"	30W	2700K/3500K/4000K or 3000K/3500K/4000K	2400 lm
	31.50"	40W	2700K/3500K/4000K or 3000K/3500K/4000K	3200 lm
	39.37"	50W	2700K/3500K/4000K or 3000K/3500K/4000K	4000 lm
	47.24"	60W	2700K/3500K/4000K or 3000K/3500K/4000K	4800 lm

MODEL INFORMATION:

Example: SB- D401A20WSB

Products Series	Wattage/Size	"E" Kelvin temp options (standard)	"W" Controls (don't select this column if selected S or A)	"Z" Canopy Finishes	"Y" Ring finishes	"X" Aircraft Cable
*SB-D401A	*30W = 23.62"X12.60" 40W = 31.50"X13.78" 50W = 39.37"X15.75" 60W = 47.24"X19.69"	*S=3000K/3500K/4000 K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming	*B=Black Jack	*A B C D E F G O	*Blank=10' feet 120"(Standard)
		A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	L=ELV / Triac dimming	S=Platinum Silver		5'=5 feet 60"
		T=3K-4K Tunable White control by remote/wall control	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	W=Gloss White		15'=15 feet 180"
		R3= RGB+3000K	C=Dali	O=Oil Rubbed Bronze		20'=20 feet 240"
		R4=RGB+4000K (standard)	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.			25'=25 feet 300"
Request price for other Kelvin temp and custom sizes			See control options	Full Color Name or RAL number for Custom Colors, select from Color Collections		30'=30 feet 360"

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

RGBW/TUNABLE WHITE SMART CONTROL



[SEE SPEC AND VIDEO](#)

Get Smart

Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.


DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"



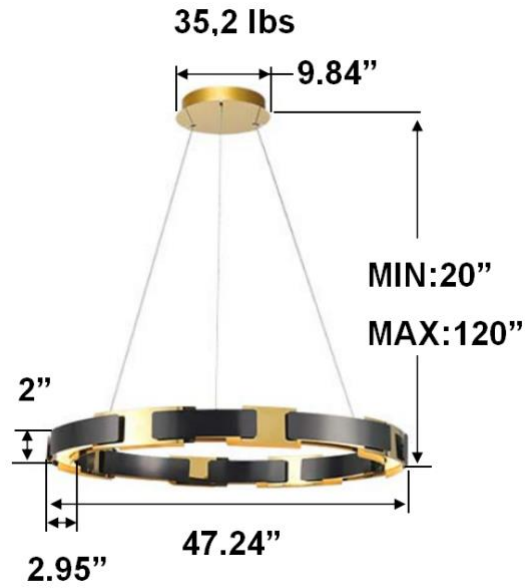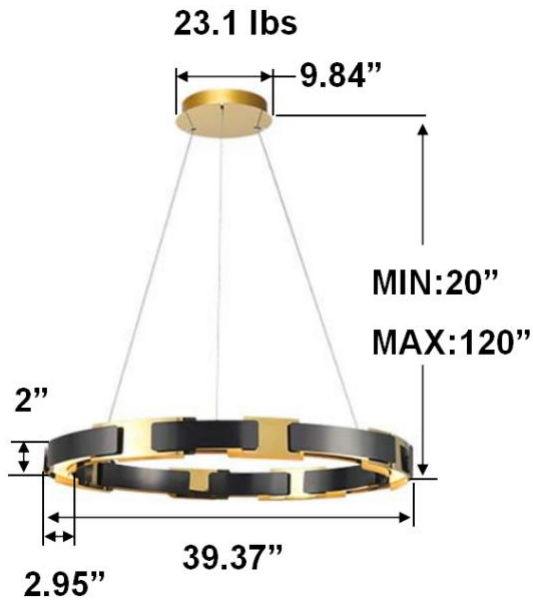


PHOTOMETRIC: Direct Illumination

15.75" 20W @ 4000K

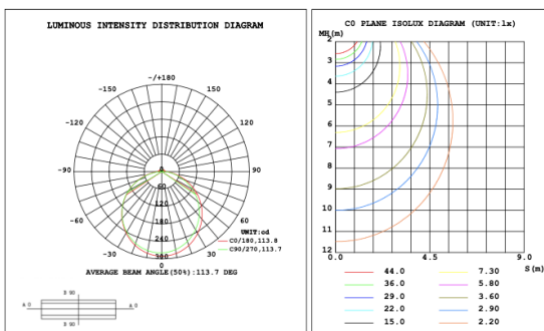




Flux out: 583.3 lm

Height	Eavg, Emax	Angle: 111.01deg	Diameter
1m	84.47, 290.41x		291.08cm
2m	21.12, 72.601x		582.15cm
3m	9.386, 32.271x		873.23cm
4m	5.279, 18.151x		1164.30cm
5m	3.379, 11.621x		1455.38cm
6m	2.346, 8.0671x		1746.46cm
7m	1.724, 5.9261x		2037.53cm
8m	1.320, 4.5371x		2328.61cm
9m	1.043, 3.5851x		2619.68cm
10m	0.8447, 2.9041x		2910.76cm



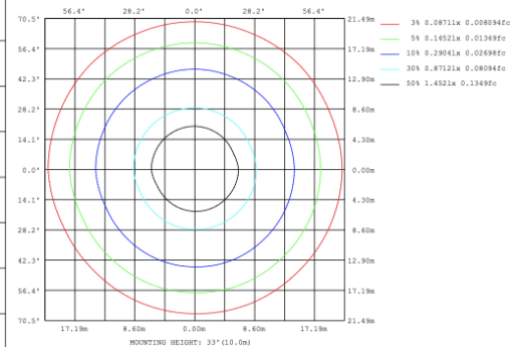


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.




23.62" 30W @ 4000K

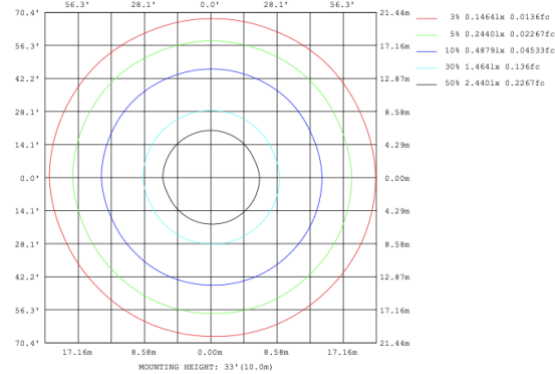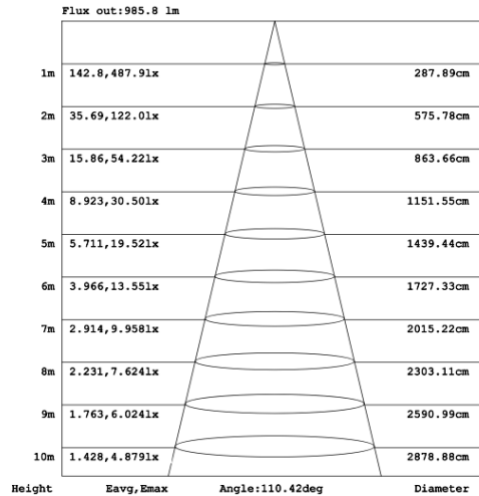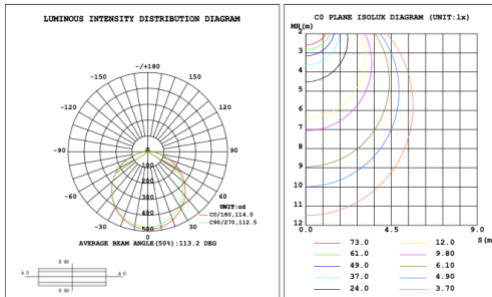

31.50" 40W @ 4000K

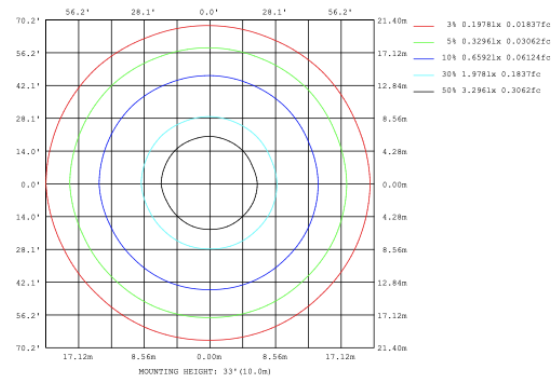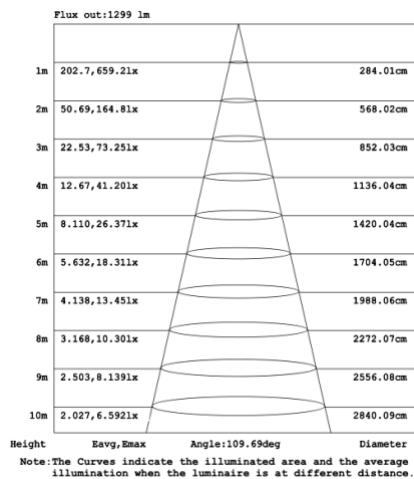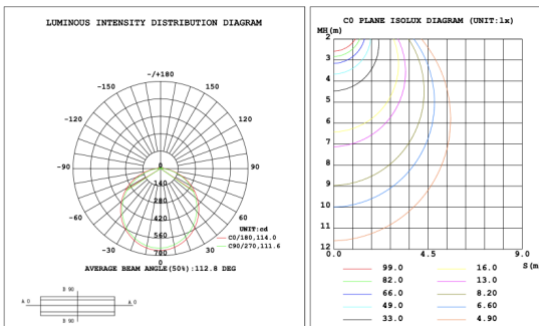

39.37" 50W @ 4000K

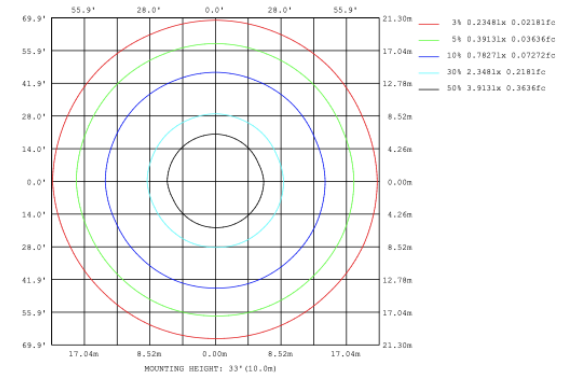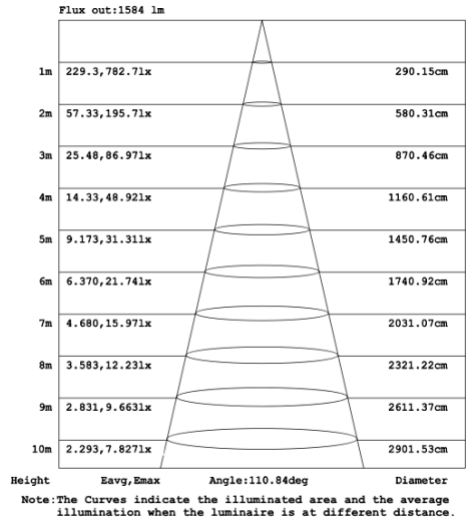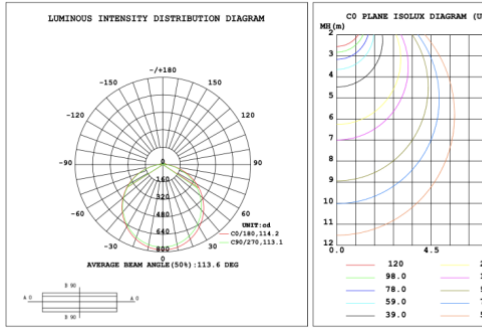

47.24" 60W @ 4000K

