



[View Aspen 3 tier on website](#)

[View Video](#)

[View application photos](#)

PRODUCT DESCRIPTION

Aspen circular pendants are made of extruded aluminum with direct and indirect lighting components using a glare free acrylic ring. Sizes range from 15.75" to 70.87" and can be combined as desired to create multiple ring masterpieces. Tunable white and RGBW. Over 6500 powder coated colors, ships assembled.

FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination direct/indirect.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- White frosted acrylic diffuser, Glare-free lens
- Fixture delivered lumens per watt ratio up to 120 LPW, 60 LPW direct, 60 LPW indirect, not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K ; Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch



MODEL INFORMATION:

Example: SB-U03A90WSB

| Products Series | Wattage/Size | "E" Kelvin temp options | "W" Controls (don't select this column if selected S or A) | "Z" Profile Finishes | "X" Aircraft Cable |
|---|--|--|--|---|---------------------------------|
| *SB-U03A | *90W=31.50"+23.62"+15.75" | *S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90 | *Blank=1-10V dimming | *B=Black Jack | *Blank=10' foot 120" (Standard) |
| SB-U03B | 150W=47.24"+39.37"+31.50" | A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90 | C=Dali | S=Platinum Silver | 5'=5 foot 60" |
| SB-U03C | | | D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system) | W=Gloss White | 15'=15 foot 180" |
| SB-U03E | 180W=59.06"+47.24"+39.37" | T=3K-4K Tunable White control by remote/wall control | | O=Oil Rubbed Bronze | 20'=20 foot 240" |
| SB-U03F | | | L=ELV / Triac dimming | 25'=25 foot 300" | |
| SB-U03H | Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.) | 30'=30 feet 360" | | | |
| SB-U03G | 90W=15.75"+23.62"+31.50" | R3= RGB+3000K | | | |
| SB-U03D | 150W=31.50"+39.37"+47.24" | R4=RGB+4000K | | | |
| | 180W=39.37"+47.24"+59.06" | | | | |
| | 200W=47.24"+59.06"+70.87" | | | | |
| Request price for other Kelvin temp and configurations | | | See control options | Find page 3 for color options or select from website Color Collections | |

STANDARD COLOR FINISHES




In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample, NFL football teams color or any RAL finish. Add Metallic, Sparkle, Transparent texture and originality to create a perfect custom products. Contact factory for quote


SOLID TONE FINISH



SHIMMER / GLITTER FINISH



PALLEON METALLIC TEXTURE FINISH

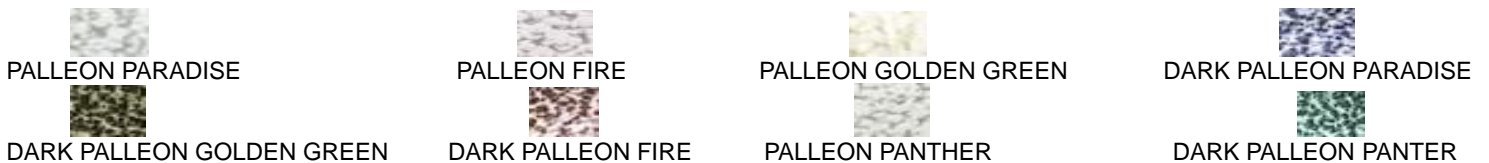

CHROME / SPECIALTY FINISH



SPARKLE FINISH



WETSTON WRINKLED TEXTURE FINISH




LUMEN OUTPUT (for color selectable not RGBW)

| Model Number | Size | Wattage | Kelvin Temp field Selectable ±500K | Delivered Lumen ±10% |
|-----------------------|----------------------|---------|--|----------------------|
| SB-U03A/B/C/D/E/F/G/H | 15.75"+23.62"+31.50" | 90W | 2700K/3500K/4000K or 3000K/3500K/4000K | 10800 lm |
| | 31.50"+39.37"+47.24" | 150W | 2700K/3500K/4000K or 3000K/3500K/4000K | 18000 lm |
| | 39.37"+47.24"+59.06" | 180W | 2700K/3500K/4000K or 3000K/3500K/4000K | 21600 lm |
| | 47.24"+59.06"+70.87" | 200W | 2700K/3500K/4000K or 3000K/3500K/4000K | 24000 lm |

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

| PICTURE | MODEL NUMBER | DESCRIPTION |
|--|----------------|--|
|  | SB-EBP/5W/B | Factory installed Remote Emergency Battery Pack 5W 90 minutes |
| | SB-EBP/10.7W/B | Factory installed Remote Emergency Battery Pack 10.7W 90 minutes |
| | SB-EBP/17W/B | Factory installed Remote Emergency Battery Pack 17W 90 minutes |

RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

Get Smart


Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"


SB-U03A

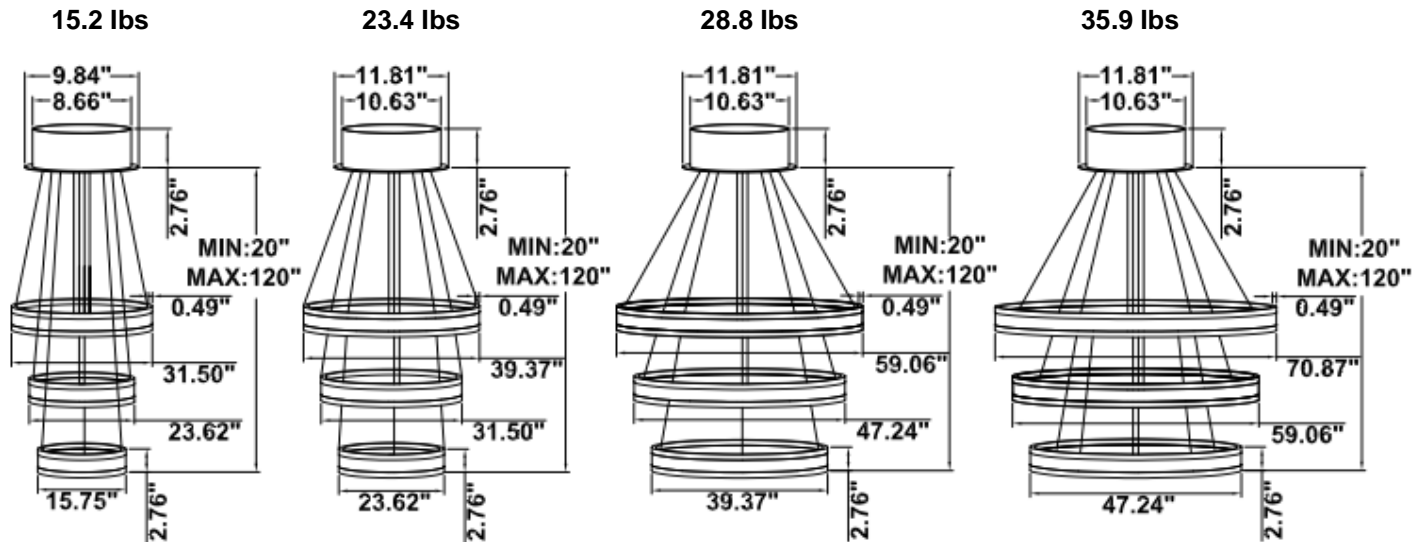


SB-U03B

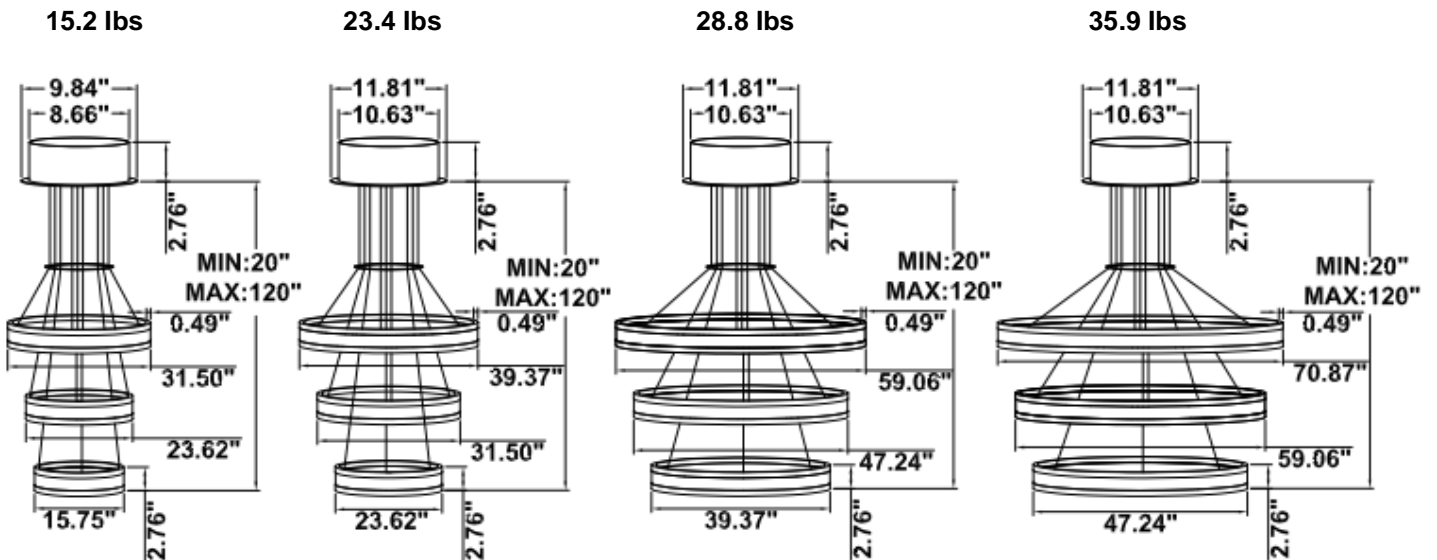


SB-U03C (Driver box size: L10.83" X W3.78" X H1.81")

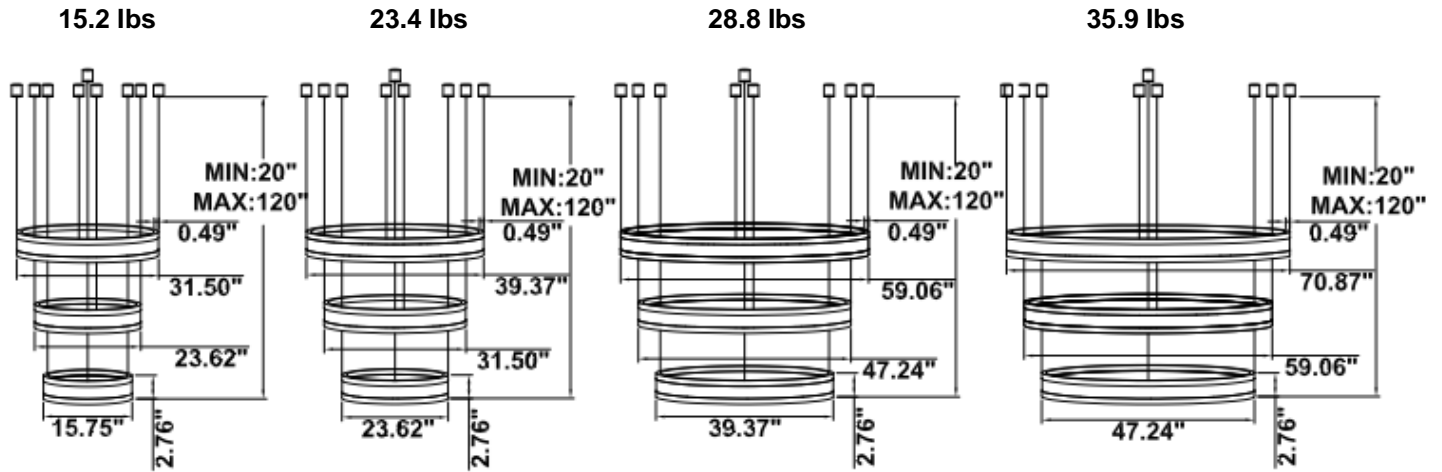

SB-U03D

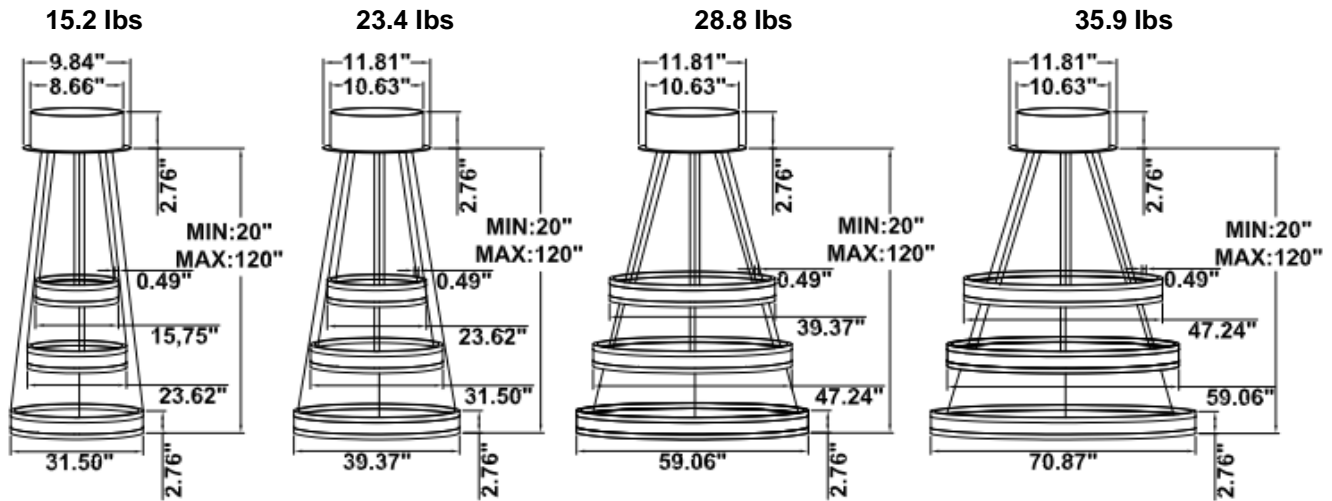


SB-U03E

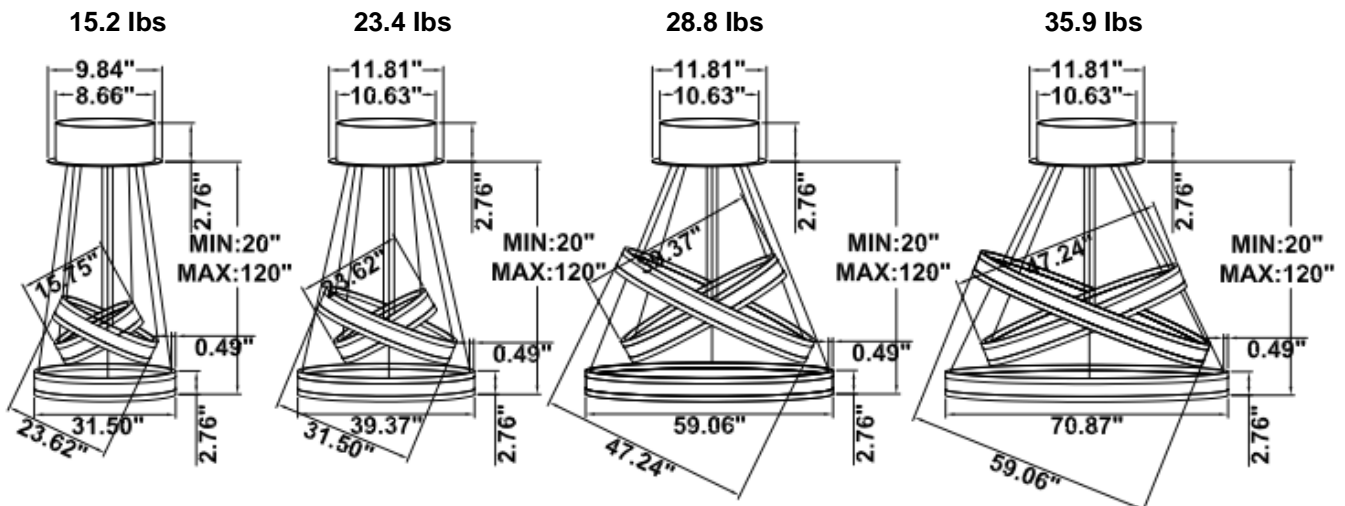


SB-U03F


15.2 lbs

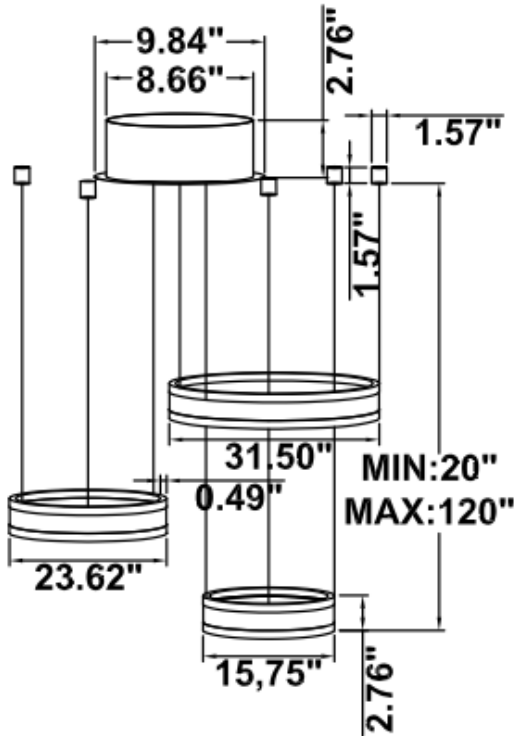


23.4 lbs

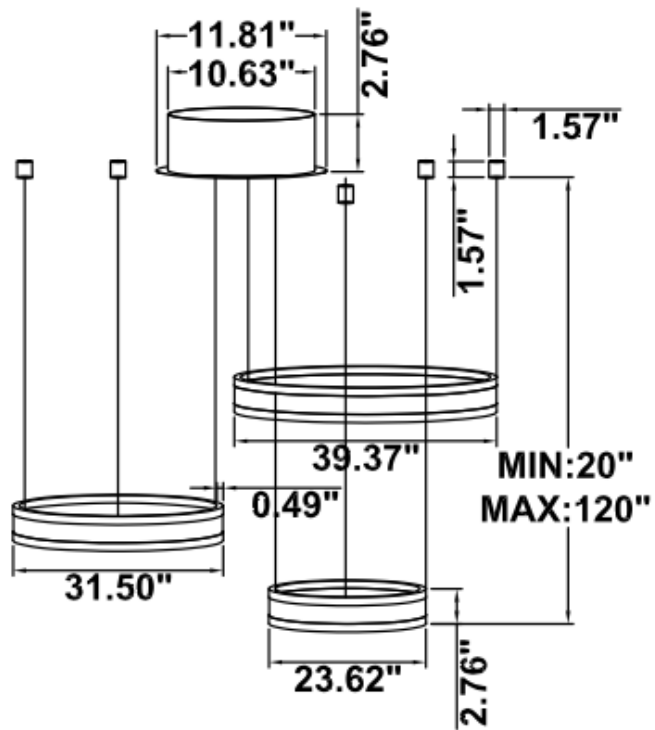


28.8 lbs

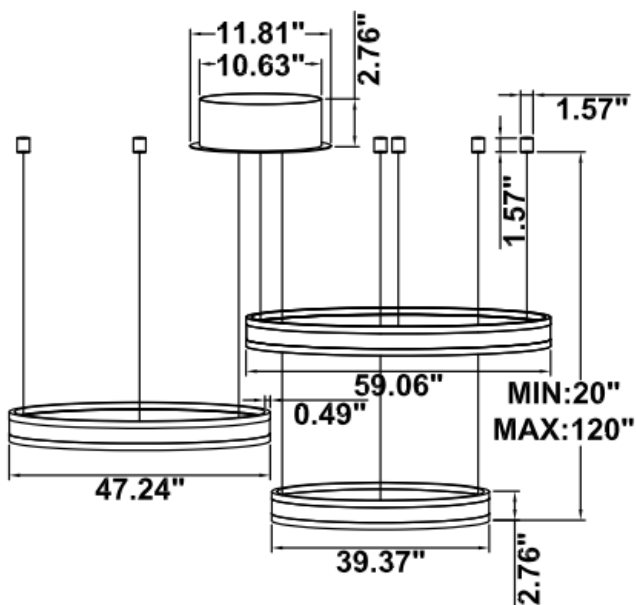


35.9 lbs

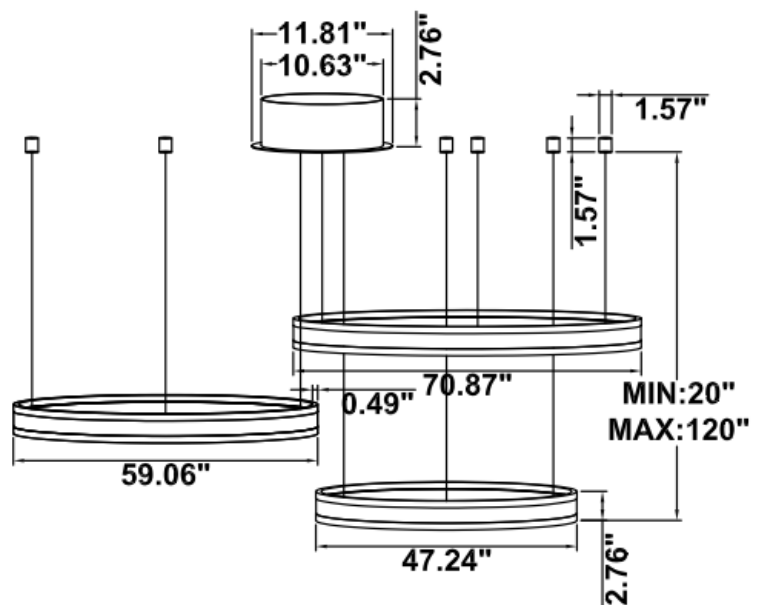

SB-U03G

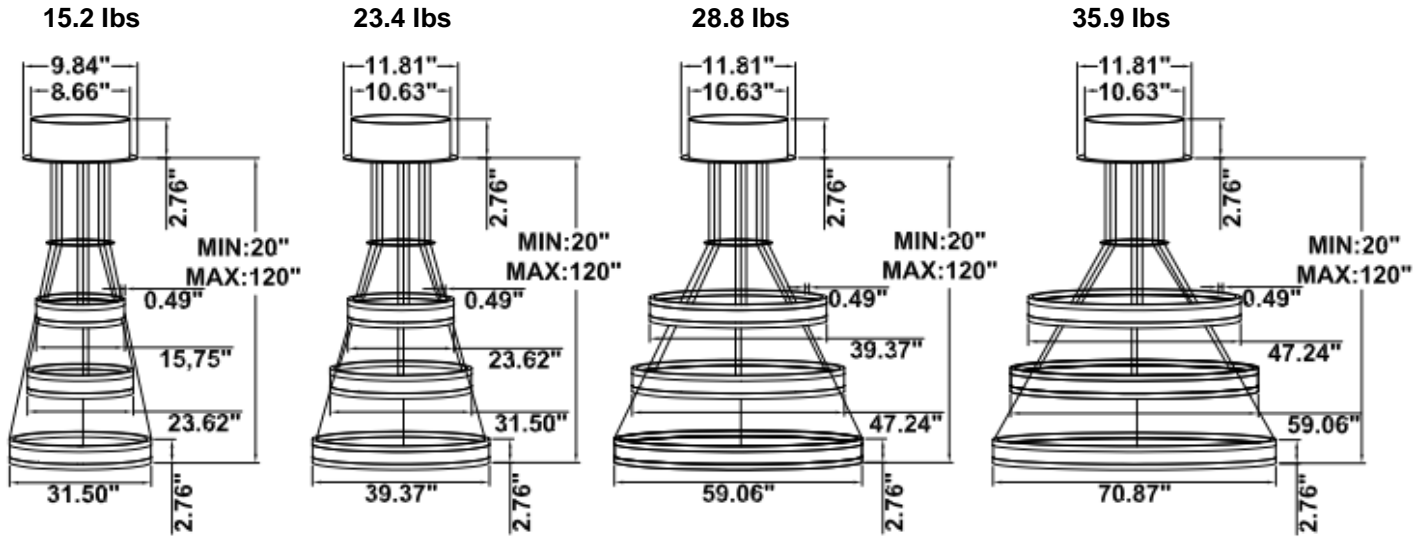


SB-U03H

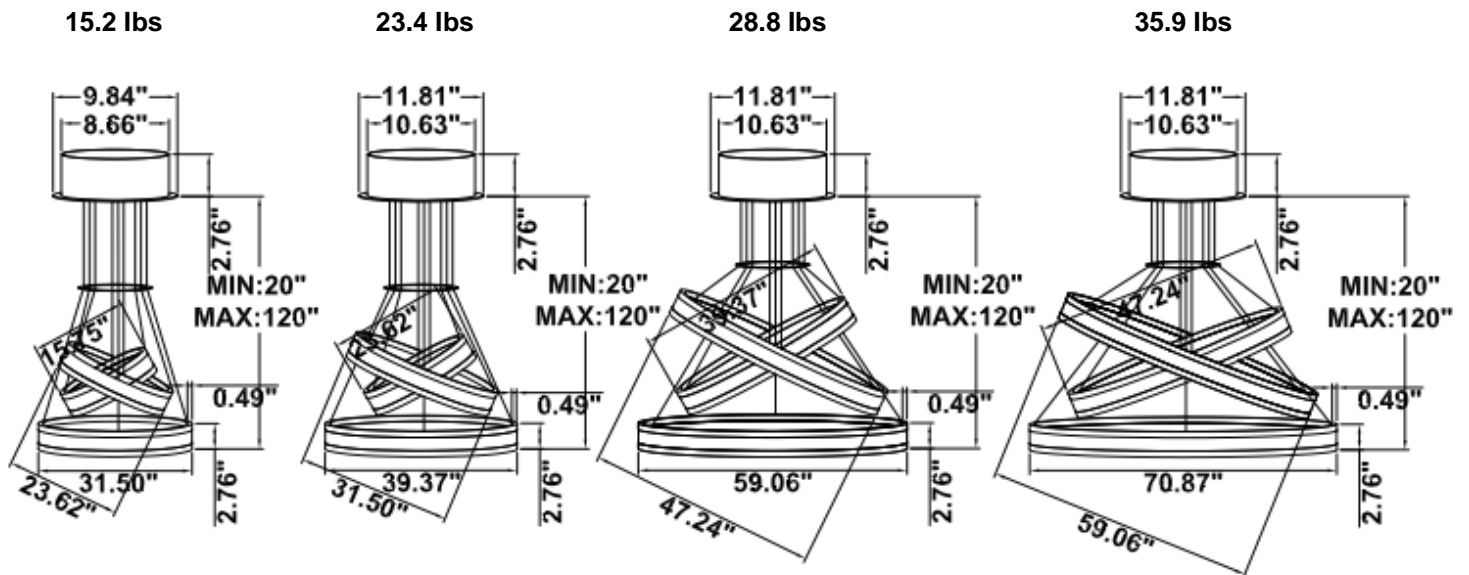


PHOTOMETRIC: Direct Illumination (Testing for single ring only)


15.75" 20W @ 4000K

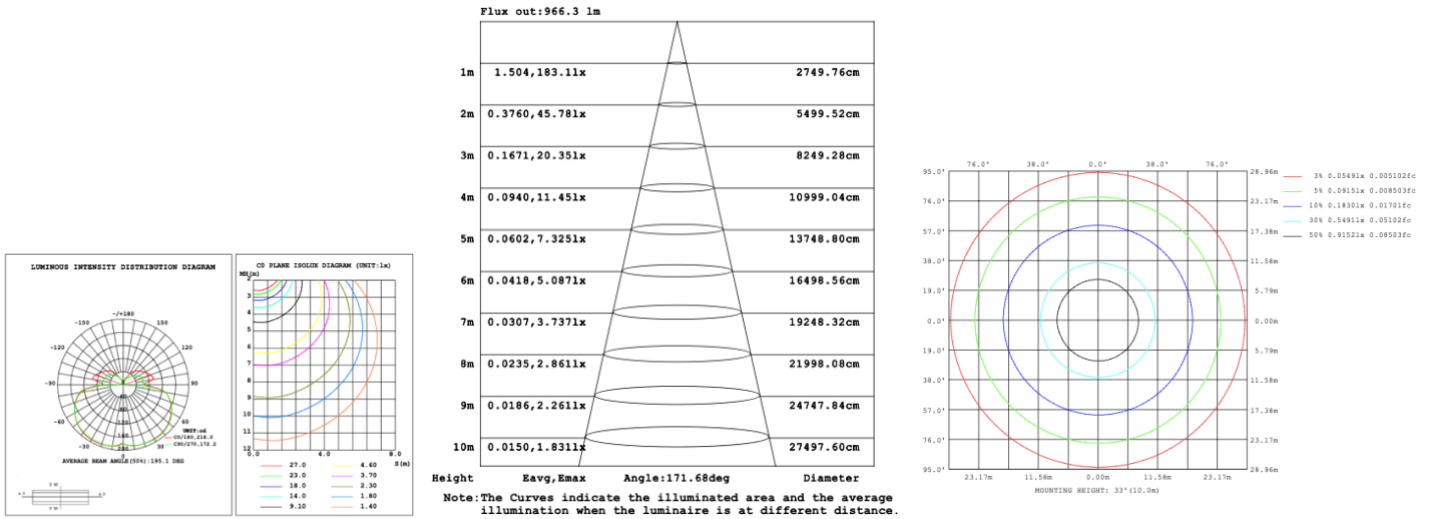

23.62" 30W @ 4000K

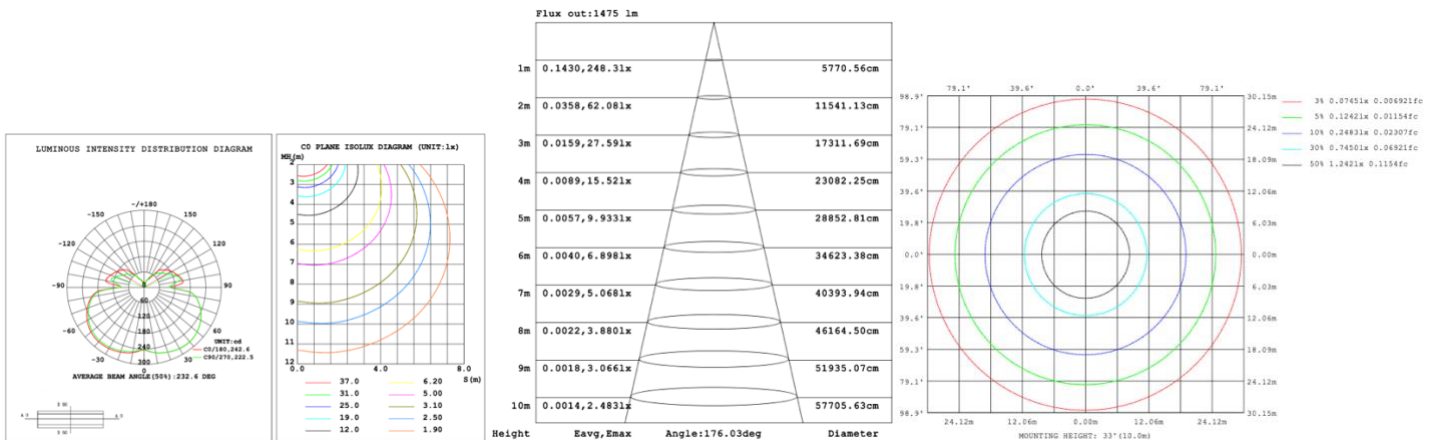


31.50" 40W @ 4000K

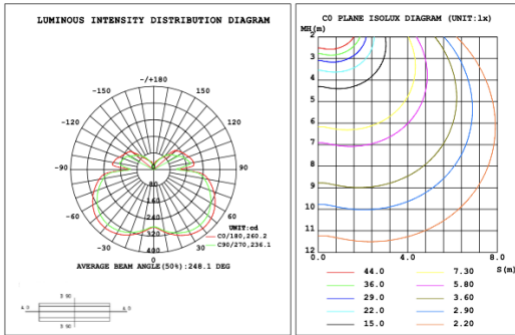


Flux out:1906 lm

| Height | Eavg,Emax | Angle:176.35deg | Diameter |
|--------|-----------------|-----------------|-------------|
| 1m | 0.0000,291.01lx | | 13888.98cm |
| 2m | 0.0000,72.751lx | | 27777.95cm |
| 3m | 0.0000,32.331lx | | 41666.93cm |
| 4m | 0.0000,18.191lx | | 55555.91cm |
| 5m | 0.0000,11.641lx | | 69444.89cm |
| 6m | 0.0000,8.0831lx | | 83333.86cm |
| 7m | 0.0000,5.9381lx | | 97222.84cm |
| 8m | 0.0000,4.5471lx | | 111111.82cm |
| 9m | 0.0000,3.5921lx | | 125000.80cm |
| 10m | 0.0000,2.9101lx | | 138889.77cm |

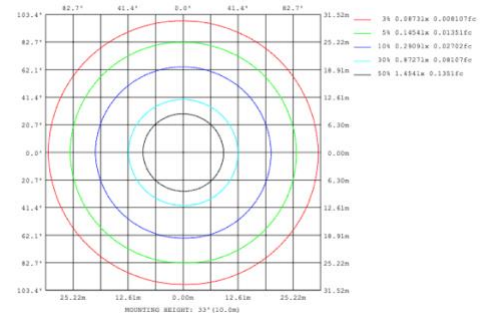


39.37" 50W @ 4000K

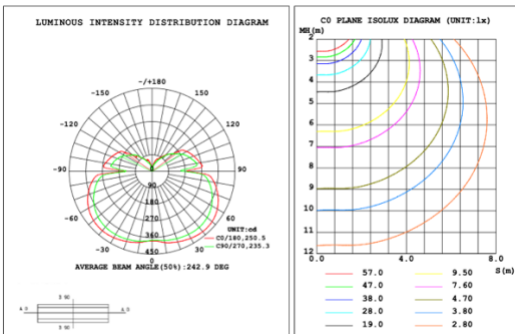


Flux out:2283 lm

| Height | Eavg,Emax | Angle:176.55deg | Diameter |
|--------|-----------------|-----------------|-------------|
| 1m | 0.0000,378.61lx | | 15804.92cm |
| 2m | 0.0000,94.651lx | | 31609.84cm |
| 3m | 0.0000,42.071lx | | 47414.77cm |
| 4m | 0.0000,23.661lx | | 63219.69cm |
| 5m | 0.0000,15.141lx | | 79024.61cm |
| 6m | 0.0000,10.521lx | | 94829.53cm |
| 7m | 0.0000,7.7271lx | | 110634.45cm |
| 8m | 0.0000,5.9161lx | | 126439.38cm |
| 9m | 0.0000,4.6741lx | | 142244.30cm |
| 10m | 0.0000,3.7861lx | | 158049.22cm |

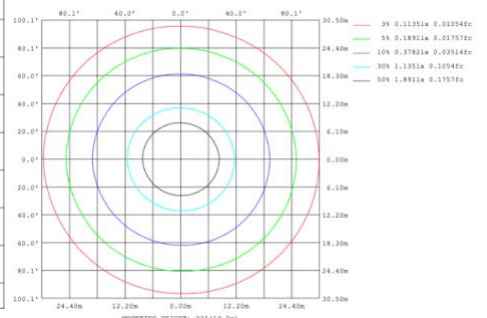


47.24" 60W @ 4000K




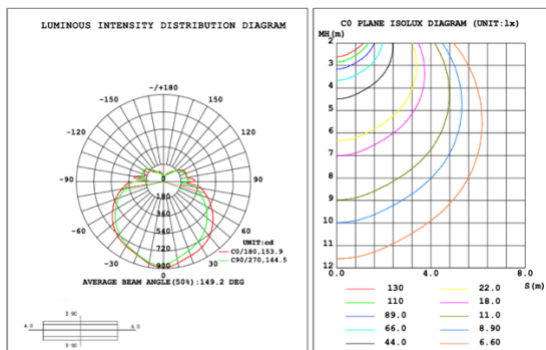


Flux out:2809 lm

| Height | Eavg,Emax | Angle:142.17deg | Diameter |
|--------|-----------------|-----------------|-----------|
| 1m | 94.38,885.31lx | | 583.66cm |
| 2m | 23.60,221.31lx | | 1167.32cm |
| 3m | 10.49,98.361lx | | 1750.97cm |
| 4m | 5.899,55.331lx | | 2334.63cm |
| 5m | 3.775,35.411lx | | 2918.29cm |
| 6m | 2.622,24.591lx | | 3501.95cm |
| 7m | 1.926,18.071lx | | 4085.61cm |
| 8m | 1.475,13.831lx | | 4669.27cm |
| 9m | 1.165,10.931lx | | 5252.92cm |
| 10m | 0.9438,8.8531lx | | 5836.58cm |

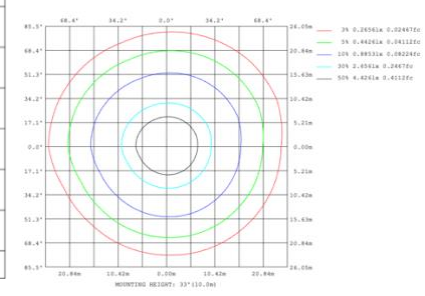

59.06" 70W @ 4000K

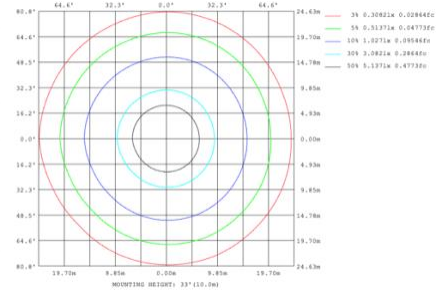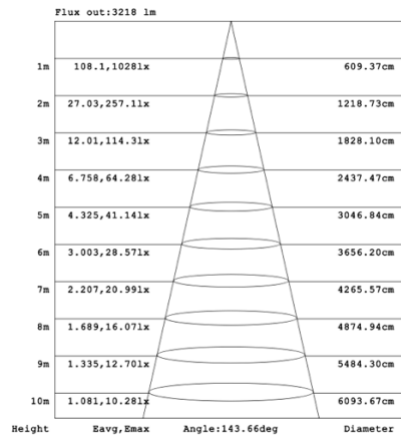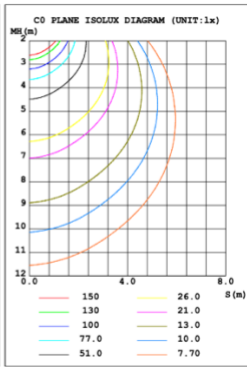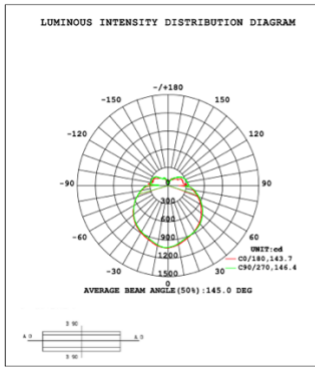

70.87" 80W @ 4000K

