

[View Aspen 4 tier on website](#)

[View Video](#)

[View application photos](#)

## PRODUCT DESCRIPTION

**Aspen circular** pendants are made of extruded aluminum with direct and indirect lighting components using a glare free acrylic ring. Sizes range from 15.75" to 70.87" and can be combined as desired to create multiple ring masterpieces. Tunable white and RGBW. Over 6500 powder coated colors, ships assembled.

### FEATURES



- 5-year limited warranty.
- Ships assembled.
- Illumination direct/indirect.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- White frosted acrylic diffuser, Glare-free lens
- Fixture delivered lumens per watt ratio up to 120 LPW, 60 LPW direct, 60 LPW indirect, not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.

### SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K ; Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

### PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch

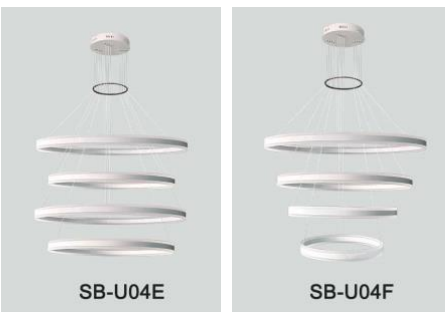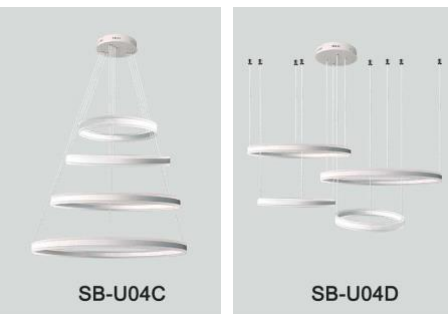


**MODEL INFORMATION:**

**Example: SB-U04A140WSB**

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-U04A	*140W=39.37"+31.50"+23.62"+15.75"	*S=3000K/3500K/4000K Color	*Blank=1-10V dimming	*B=Black Jack	*Blank=10' foot 120" (Standard)
SB-U04F	220W=59.06"+47.24"+39.37"+31.50"	Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	L=ELV / Triac dimming	S=Platinum Silver	5'=5 foot 60"
	260W=70.87"+59.06"+47.24"+39.37"		C=Dali	W=Gloss White	15'=15 foot 180"
SB-U04B	100W=23.62"+15.75"+23.62"+15.75"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	O=Oil Rubbed Bronze	20'=20 foot 240"
	140W=31.50"+23.62"+31.50"+23.62"				25'=25 foot 300"
	180W=39.37"+31.50"+39.37"+31.50"				30'=30 foot 360"
SB-U04E	220W=47.24"+39.37"+47.24"+39.37"	T=3K-4K Tunable White control by remote/wall control	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.		
	260W=59.06"+47.24"+59.06"+47.24"	R3= RGB+3000K			
	300W=70.87"+59.06"+70.87"+59.06"	R4=RGB+4000K			
SB-U04C	140W=15.75"+23.62"+31.50"+39.37"	<b>Request price for other Kelvin temp and configurations</b>	<a href="#">See control options</a>	<b>Find page 3 for color options or select from website <a href="#">Color Collections</a></b>	
SB-U04G	220W=31.50"+39.37"+47.24"+59.06"				
	260W=39.37"+47.24"+59.06"+70.87"				
SB-U04D	140W=15.75"+39.37"+31.50"+23.62"				
	220W=31.50"+59.06"+47.24"+39.37"				
	260W=39.37"+70.87"+59.06"+47.24"				

**STANDARD COLOR FINISHES**



GLOSS WHITE

PLATINUM SILVER

BLACK JACK

OIL RUBBED BRONZE

GLACIER is an architectural and decorative division of SNOWBALL INC.

E: [sales@snowball-inc.com](mailto:sales@snowball-inc.com)


W: [www.snowball-inc.com](http://www.snowball-inc.com)

In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample, NFL football teams color or any RAL finish. Add Metallic, Sparkle, Transparent texture and originality to create a perfect custom products. Contact factory for quote.


**SOLID TONE FINISH**



**SHIMMER / GLITTER FINISH**



**PALLEON METALLIC TEXTURE FINISH**

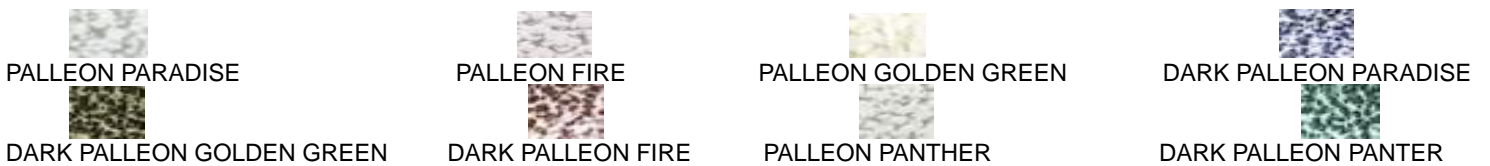

**CHROME / SPECIALTY FINISH**



**SPARKLE FINISH**



**WETSTON WRINKLED TEXTURE FINISH**




## LUMEN OUTPUT (for color selectable not RGBW)

Model Number	Size	Wattage	Kelvin Temp field Selectable $\pm 500K$	Delivered Lumen $\pm 10\%$
SB-U04A/C/D/F/G	39.37"+31.50"+23.62"+15.75"	140W	2700K/3500K/4000K or 3000K/3500K/4000K	16800 lm
	59.06"+47.24"+39.37"+31.50"	220W	2700K/3500K/4000K or 3000K/3500K/4000K	26400 lm
	70.87"+59.06"+47.24"+39.37"	260W	2700K/3500K/4000K or 3000K/3500K/4000K	31200 lm
SB-U04B/E	23.62"+15.75"+23.62"+15.75"	100W	2700K/3500K/4000K or 3000K/3500K/4000K	120000 lm
	31.50"+23.62"+31.50"+23.62"	140W	2700K/3500K/4000K or 3000K/3500K/4000K	16800 lm
	39.37"+31.50"+39.37"+31.50"	180W	2700K/3500K/4000K or 3000K/3500K/4000K	21600 lm
	47.24"+39.37"+47.24"+39.37"	220W	2700K/3500K/4000K or 3000K/3500K/4000K	26400 lm
	59.06"+47.24"+59.06"+47.24"	260W	2700K/3500K/4000K or 3000K/3500K/4000K	31200 lm
	70.87"+59.06"+70.87"+59.06"	300W	2700K/3500K/4000K or 3000K/3500K/4000K	36000 lm

## EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

## RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

### Get Smart


Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

**DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"**


**SB-U04A**

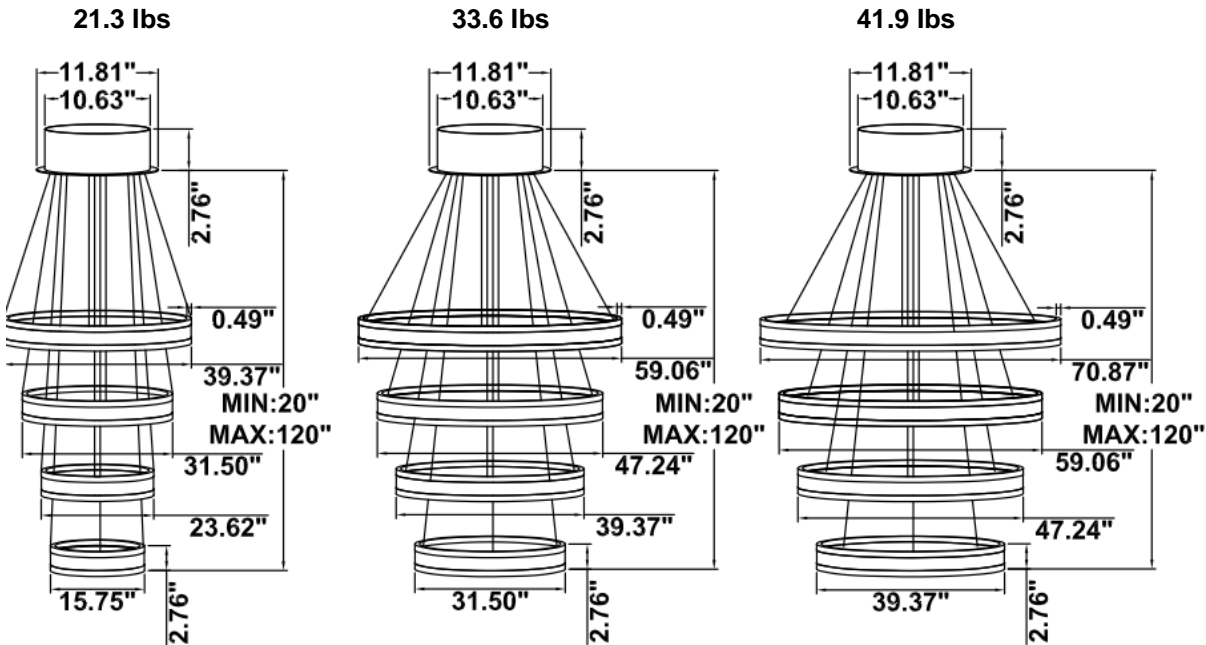


**SB-U04B**

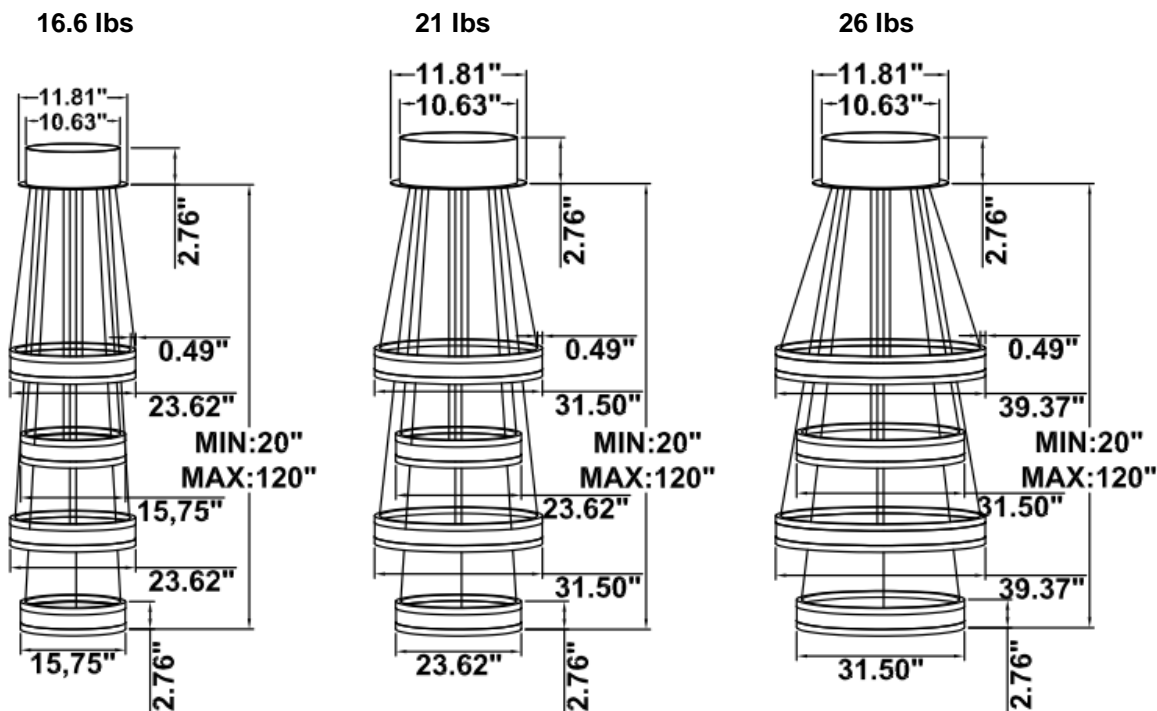


32 lbs

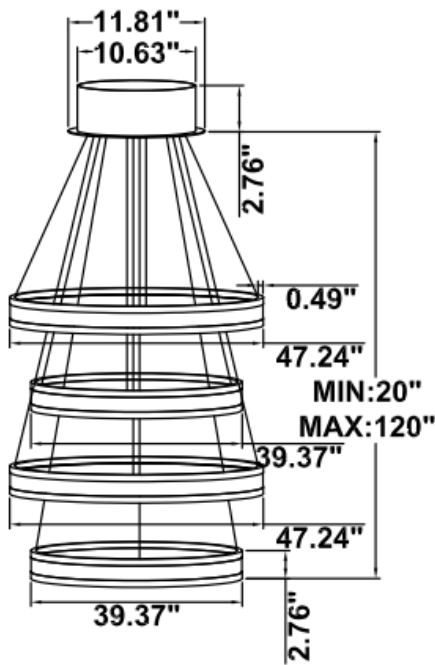

42 lbs

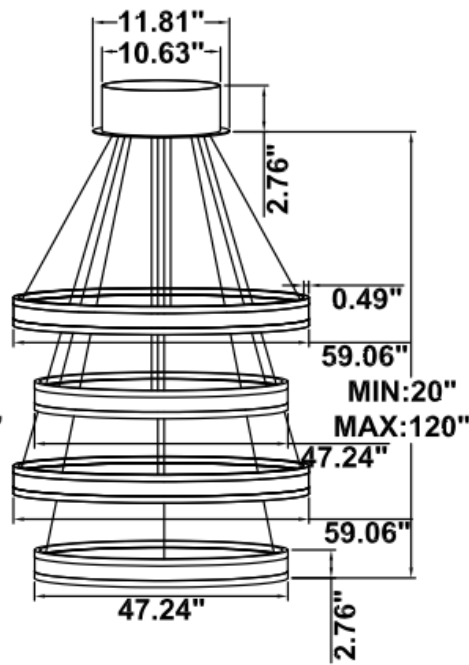


49 lbs

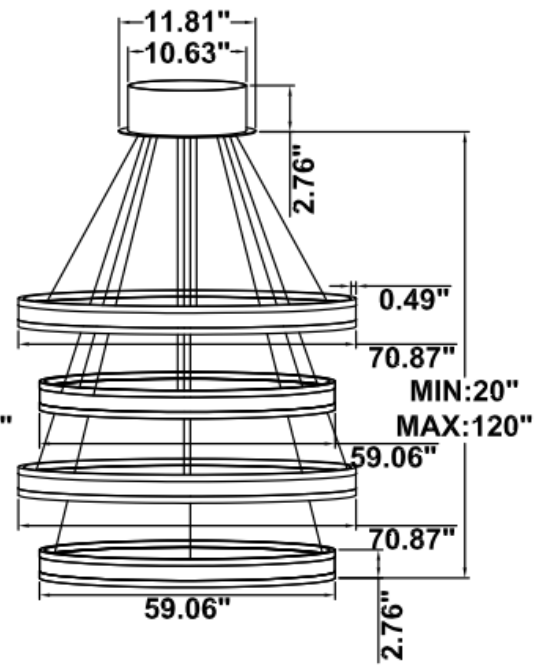


**SB-U04C**


21.3 lbs

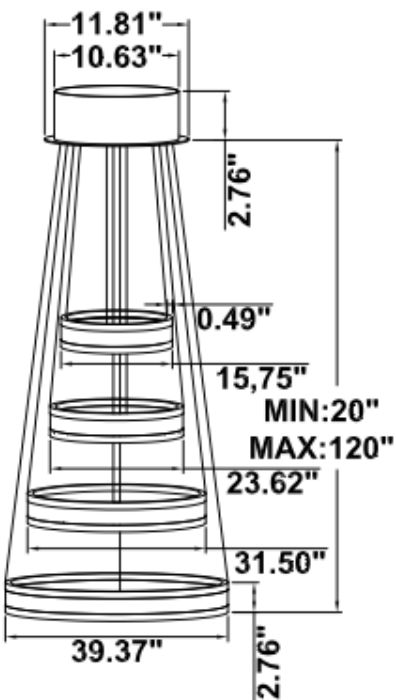


33.6 lbs

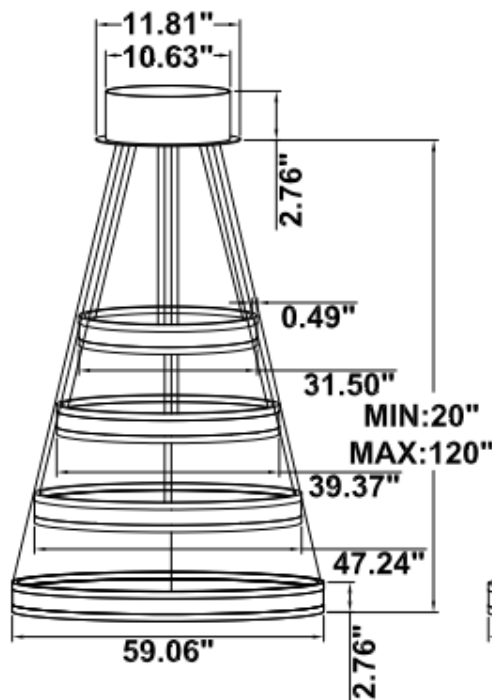


41.9 lbs

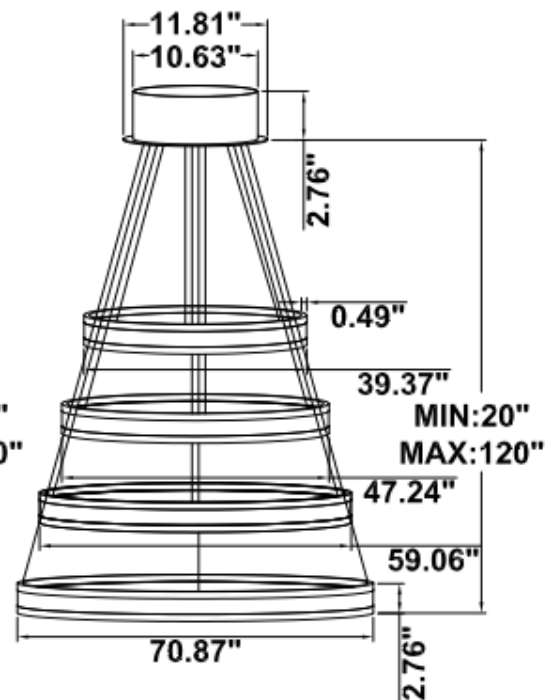


**SB-U04D**

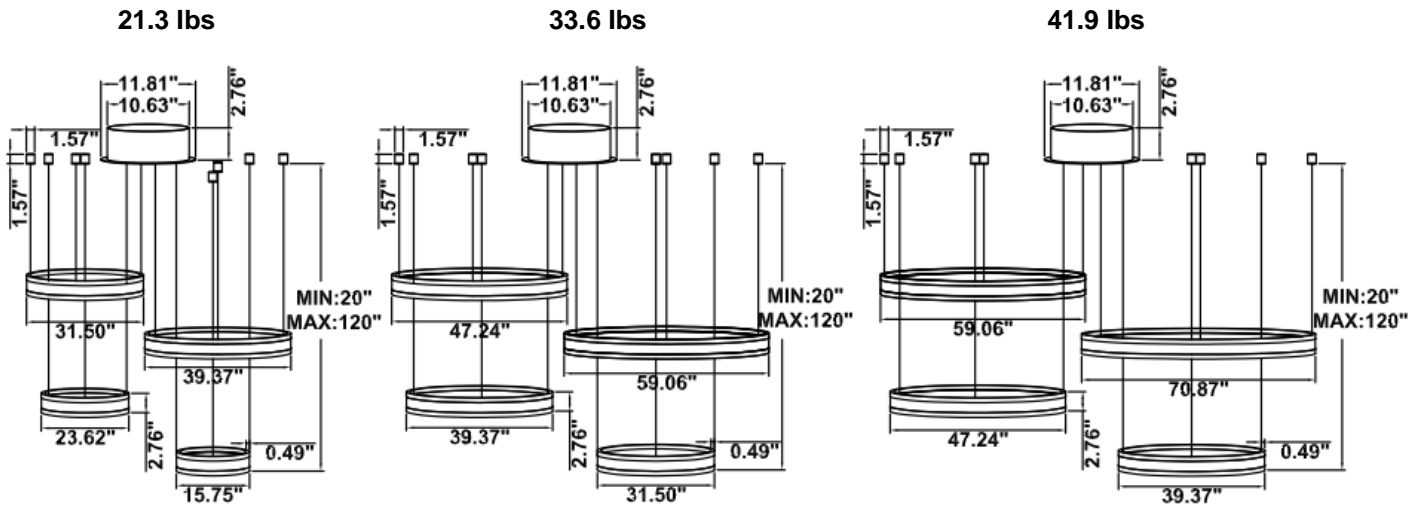


**SB-U04E**

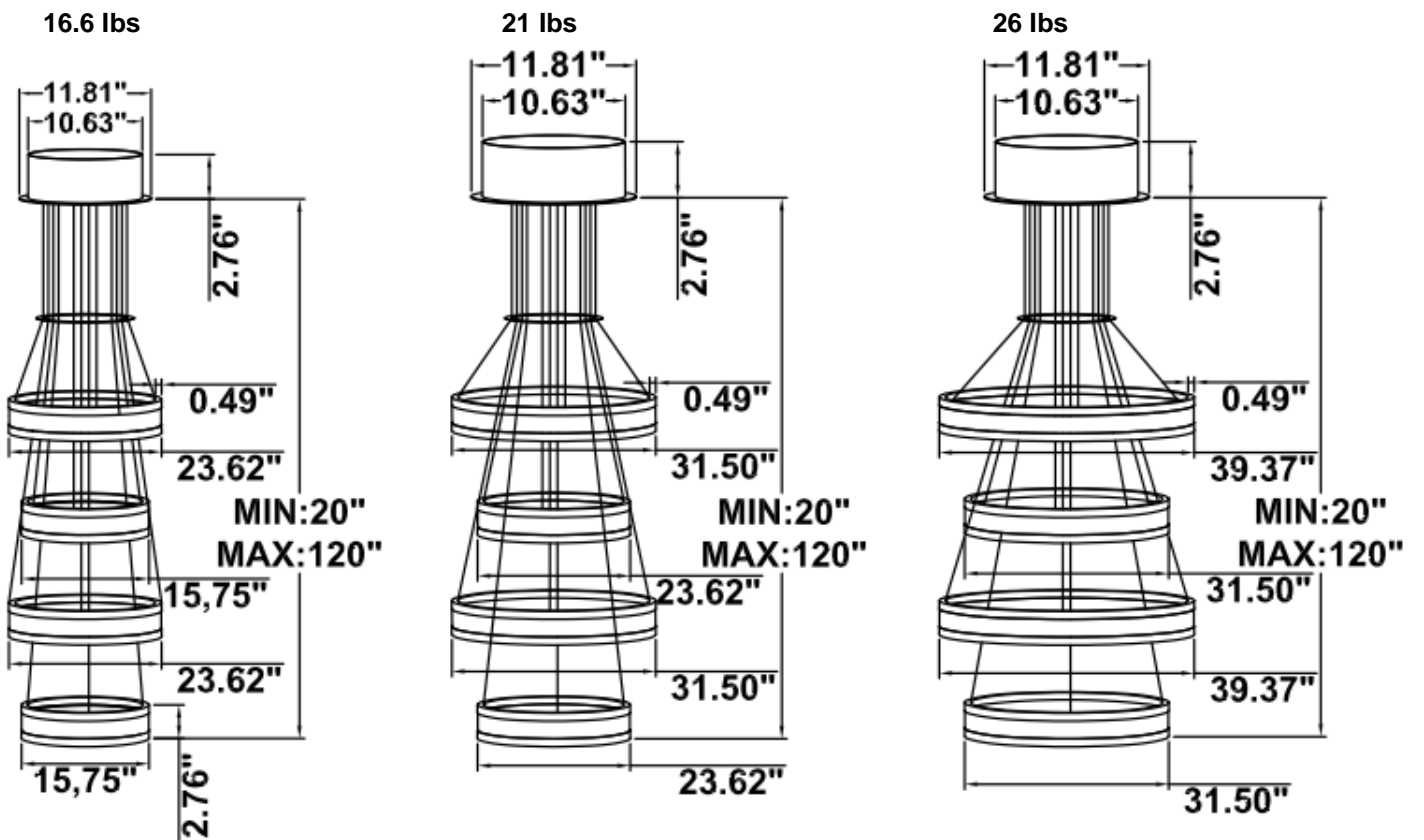


32 lbs

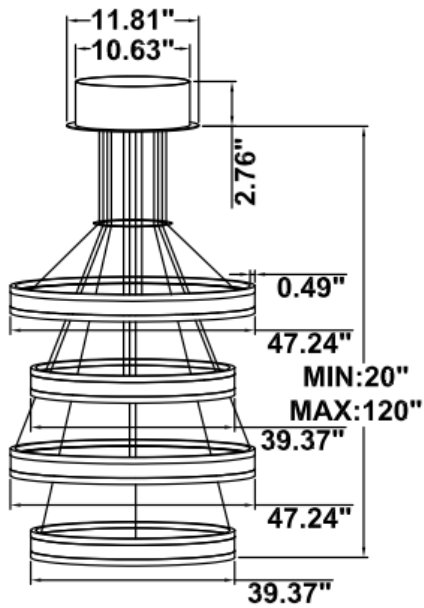

42 lbs

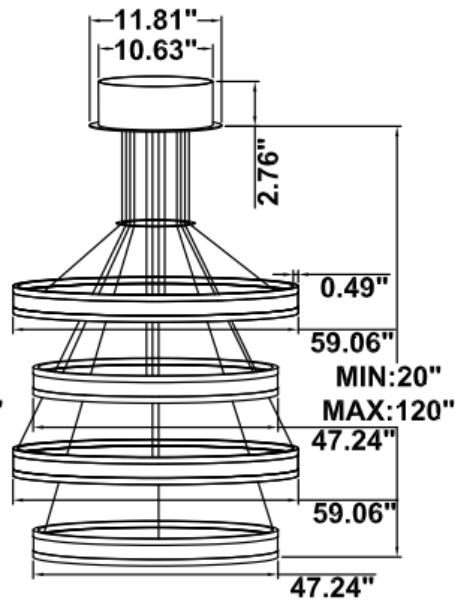


49 lbs

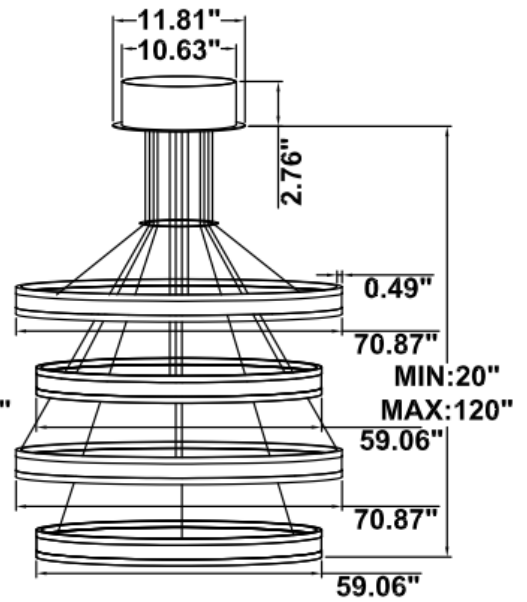


**SB-U04F**


21.3 lbs

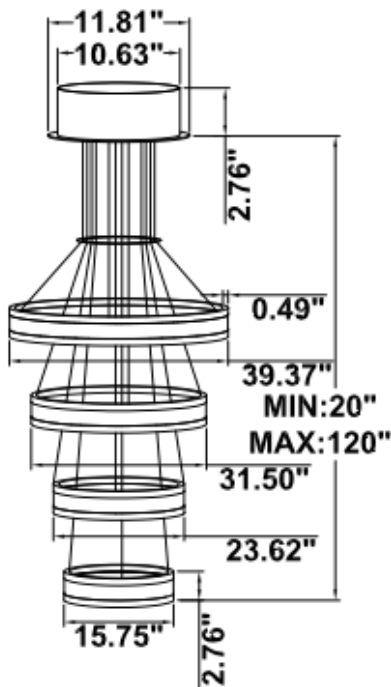

33.6 lbs

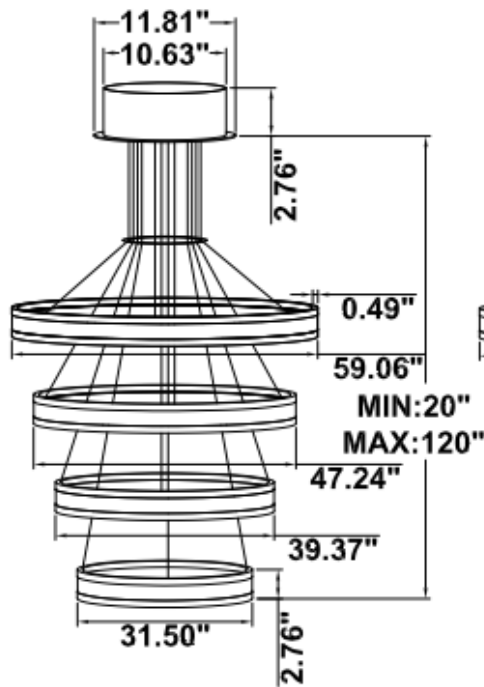


41.9 lbs

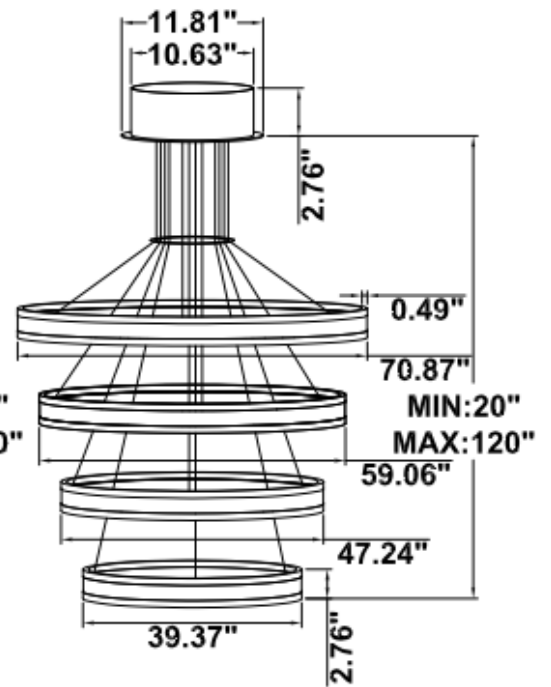




**SB-U04G**

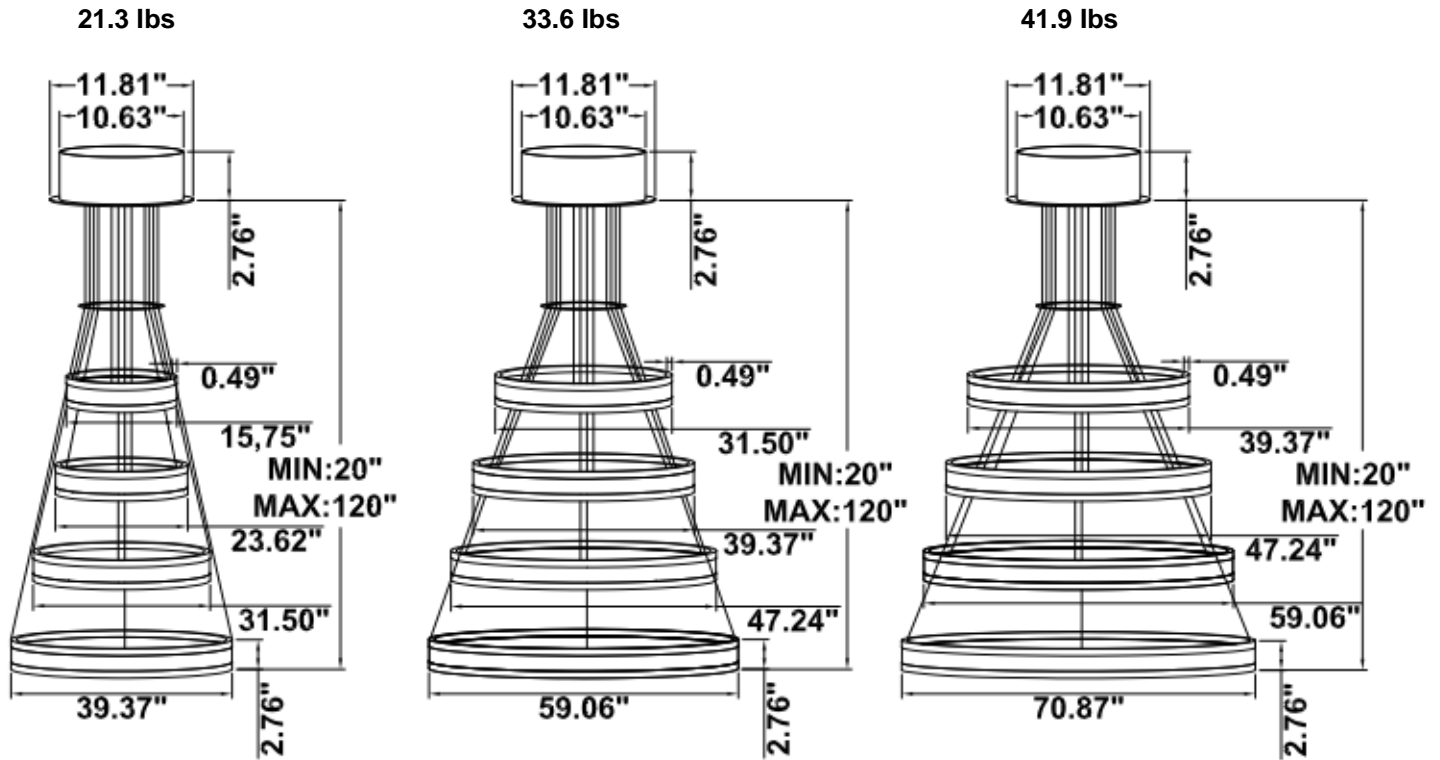


**PHOTOMETRIC: Direct Illumination (Testing for single ring only)**


**15.75" 20W @ 4000K**

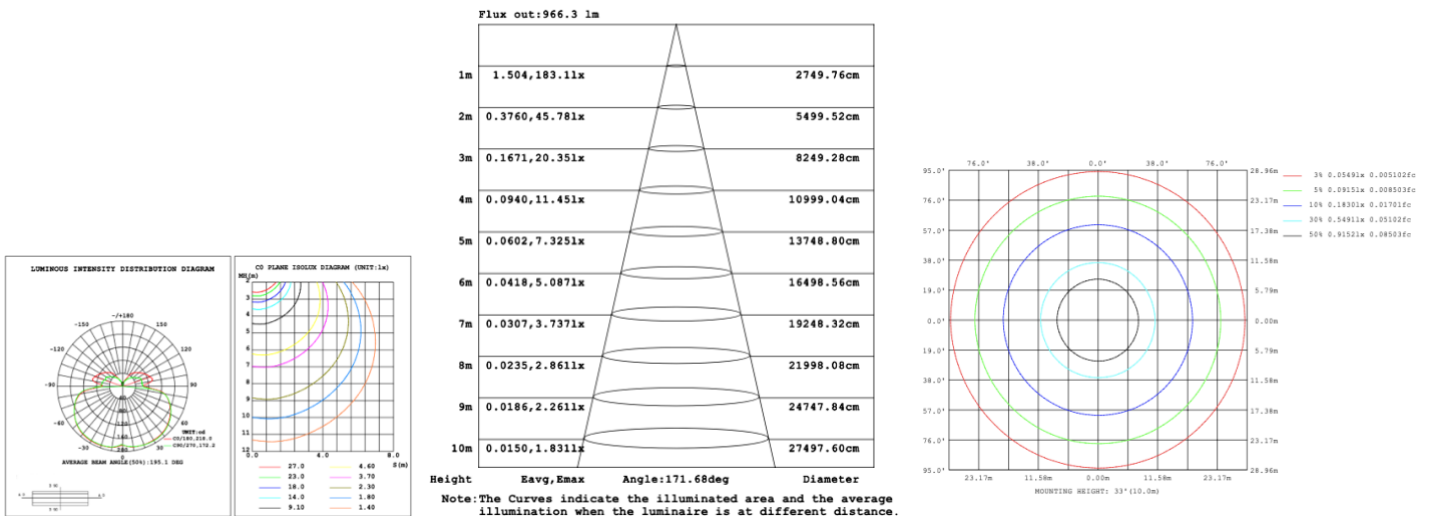


**23.62" 30W @ 4000K**

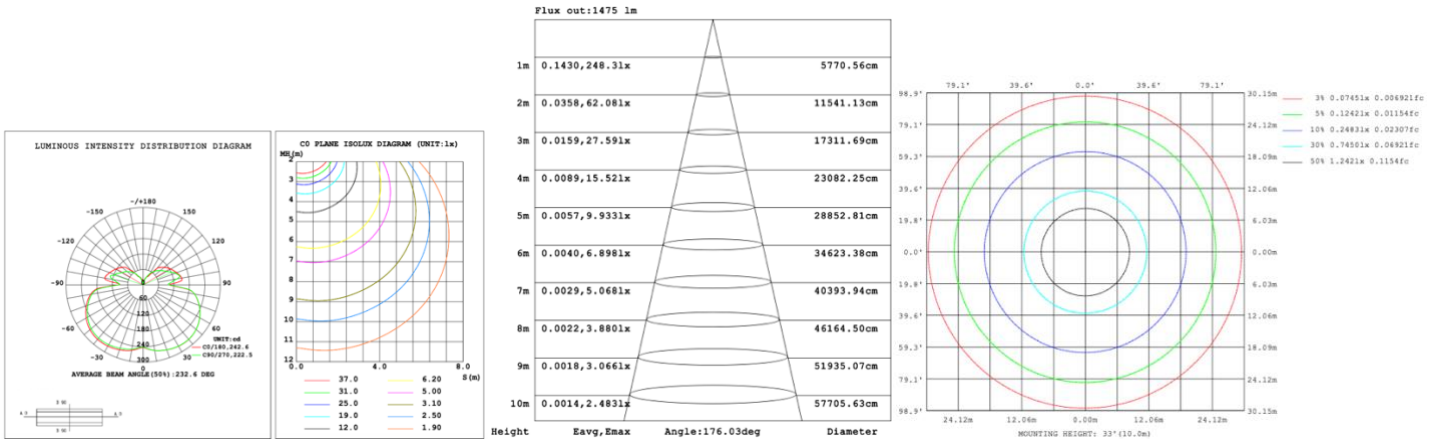





**31.50" 40W @ 4000K**

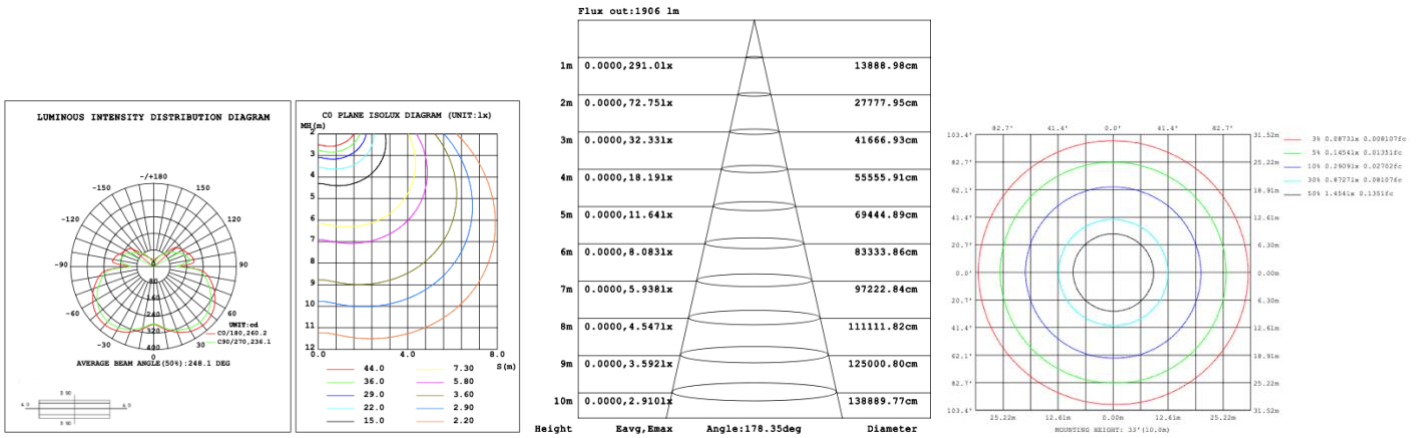





**39.37" 50W @ 4000K**

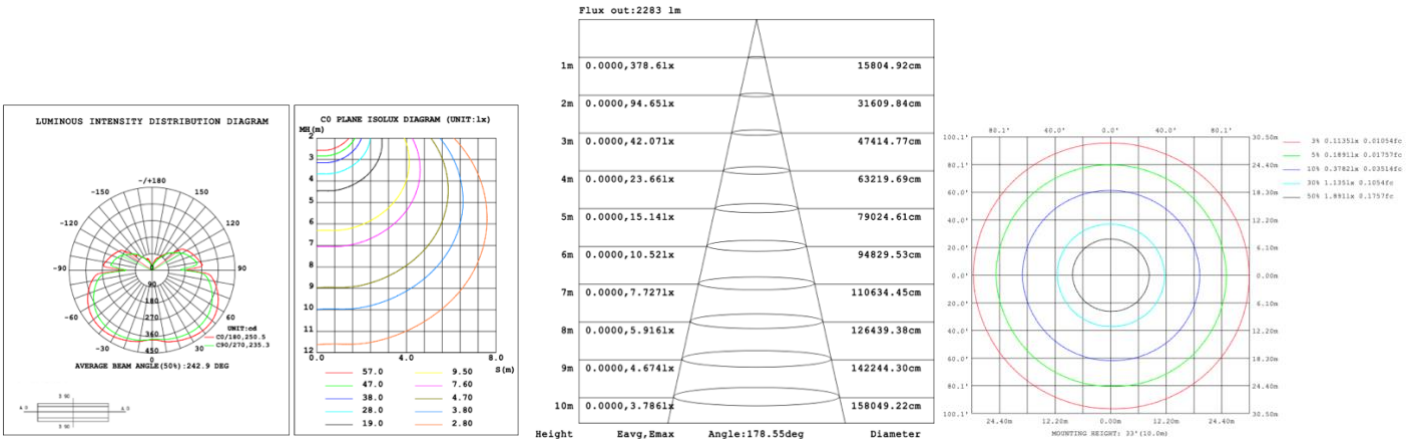

**47.24" 60W @ 4000K**

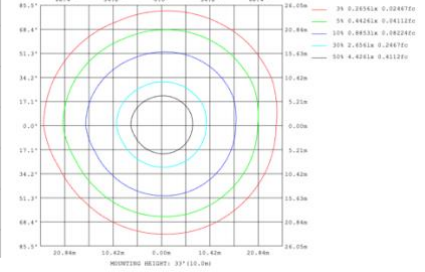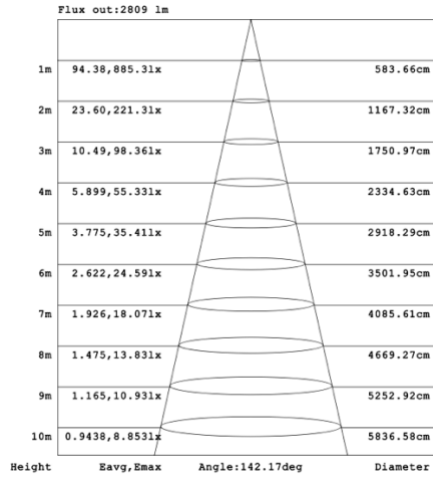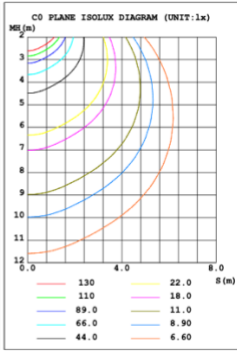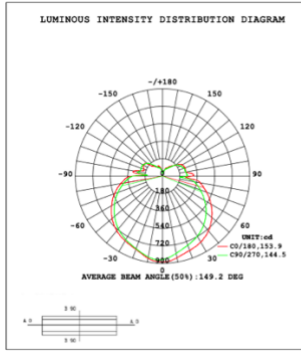

**59.06" 70W @ 4000K**

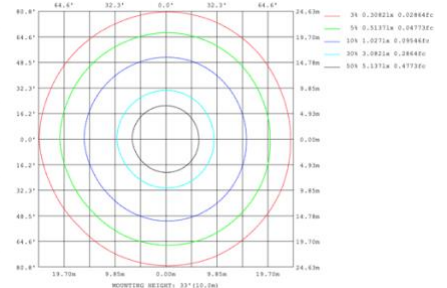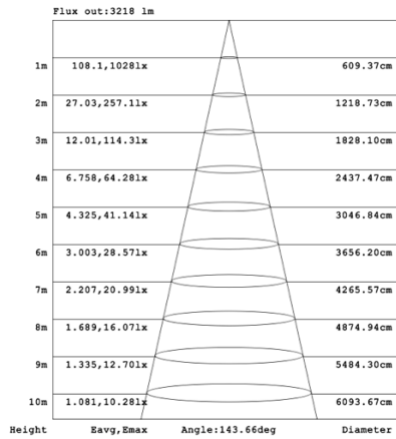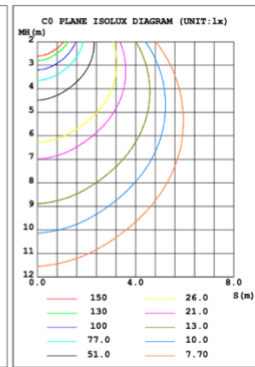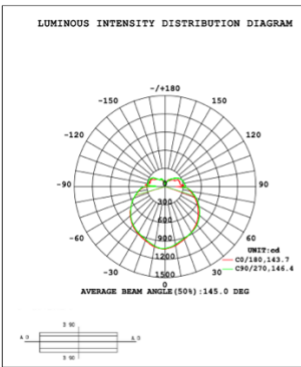

**70.87" 80W @ 4000K**

