



[View Aspen 5 tier on website](#)

[View Video](#)

[View application photos](#)

PRODUCT DESCRIPTION

Aspen circular pendants are made of extruded aluminum with direct and indirect lighting components using a glare free acrylic ring. Sizes range from 15.75" to 70.87" and can be combined as desired to create multiple ring masterpieces. Tunable white and RGBW. Over 6500 powder coated colors, ships assembled.

FEATURES


- 5-year limited warranty.
- Ships assembled.
- Illumination direct/indirect.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- White frosted acrylic diffuser, Glare-free lens
- Fixture delivered lumens per watt ratio up to 120 LPW, 60 LPW direct, 60 LPW indirect, not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K ; Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch

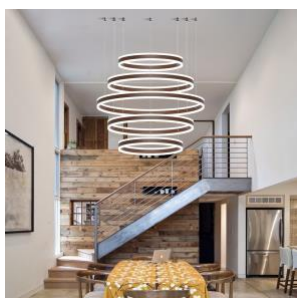


MODEL INFORMATION:

Example: SB-U05A200WSB

| Products Series | Wattage/Size | "E" Kelvin temp options | "W" Controls (don't select this column if selected S or A) | "Z" Profile Finishes | "X" Aircraft Cable |
|--------------------|--|--|---|---|---------------------------------|
| *SB-U05A | *200W=47.24"+39.37"+31.50"+23.62"+15.57" | *S=3000K/3500K/4000K | *Blank=1-10V dimming | *B=Black Jack | *Blank=10' foot 120" (Standard) |
| | 250W=59.06"+47.24"+39.37"+31.50"+23.62" | Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90 | L=ELV / Triac dimming | S=Platinum Silver | 5'=5 foot 60" |
| | 300W=70.87"+59.06"+47.24"+39.37"+31.50" | | C=Dali | W=Gloss White | 15'=15 foot 180" |
| SB-U05B SB-U05C | 190W=23.62"+31.50"+39.37"+31.50"+23.62" | A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90 | D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system) | O=Oil Rubbed Bronze | 20'=20 foot 240" |
| | 240W=31.50"+39.37"+47.24"+39.37"+31.50" | | | | 25'=25 foot 300" |
| | 290W=39.37"+47.24"+59.06"+47.24"+39.37" | | | | 30'=30 foot 360" |
| | 340W=47.24"+59.06"+70.87"+59.06"+47.24" | | | | |
| SB-U05D | 140W=23.62"+31.50"+15.75"+23.62"+15.75" | T=3K-4K Tunable White control by remote/wall control | Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice. | | |
| | 180W=31.50"+39.37"+23.62"+31.50"+23.62" | R3= RGB+3000K | | | |
| | 190W=31.50"+47.24"+15.75"+23.62"+39.37" | R4=RGB+4000K | | | |
| | 240W=39.37"+47.24"+31.50"+39.37"+31.50" | Request price for other Kelvin temp and configurations | See control options | Find page 3 for color options or select from website Color Collections | |
| | 290W=47.24"+59.06"+39.37"+47.24"+39.37" | | | | |
| | 340W=59.06"+70.87"+47.24"+59.06"+47.24" | | | | |

STANDARD COLOR FINISHES

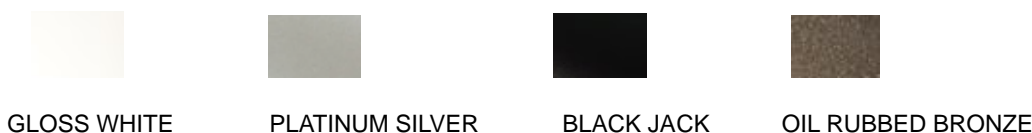


In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample, NFL football teams color or any RAL finish. Add Metallic, Sparkle, Transparent texture and originality to create a perfect custom products. Contact factory for quote.


SOLID TONE FINISH



SHIMMER / GLITTER FINISH



PALLEON METALLIC TEXTURE FINISH

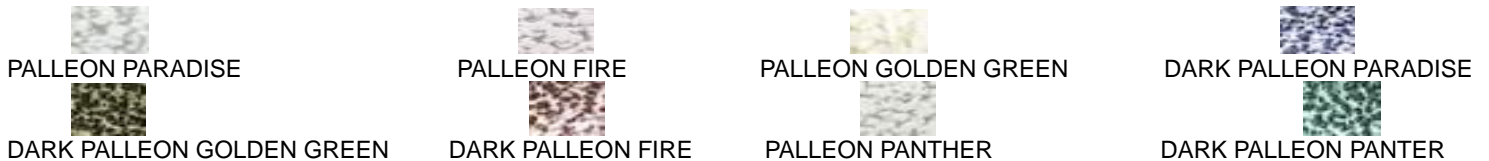

CHROME / SPECIALTY FINISH



SPARKLE FINISH



WETSTON WRINKLED TEXTURE FINISH




LUMEN OUTPUT (for color selectable not RGBW)

| Model Number | Size | Wattage | Kelvin Temp field Selectable $\pm 500K$ | Delivered Lumen $\pm 10\%$ |
|--------------|------------------------------------|---------|---|----------------------------|
| SB-U05A | 47.24"+39.37"+31.50"+23.62"+15.57" | 200W | 2700K/3500K/4000K or 3000K/3500K/4000K | 24000 lm |
| | 59.06"+47.24"+39.37"+31.50"+23.62" | 250W | 2700K/3500K/4000K or 3000K/3500K/4000K | 30000 lm |
| | 70.87"+59.06"+47.24"+39.37"+31.50" | 300W | 2700K/3500K/4000K or 3000K/3500K/4000K | 36000 lm |
| SB-U05B/C | 23.62"+31.50"+39.37"+31.50"+23.62" | 190W | 2700K/3500K/4000K or 3000K/3500K/4000K | 22800 lm |
| | 31.50"+39.37"+47.24"+39.37"+31.50" | 240W | 2700K/3500K/4000K or 3000K/3500K/4000K | 28800 lm |
| | 39.37"+47.24"+59.06"+47.24"+39.37" | 290W | 2700K/3500K/4000K or 3000K/3500K/4000K | 34800 lm |
| | 47.24"+59.06"+70.87"+59.06"+47.24" | 340W | 2700K/3500K/4000K or 3000K/3500K/4000K | 40800 lm |
| SB-U05D | 23.62"+31.50"+15.75"+23.62"+15.75" | 140W | 2700K/3500K/4000K or 3000K/3500K/4000K | 16800 lm |
| | 31.50"+39.37"+23.62"+31.50"+23.62" | 180W | 2700K/3500K/4000K or 3000K/3500K/4000K | 21600 lm |
| | 31.50"+47.24"+15.75"+23.62"+39.37" | 190W | 2700K/3500K/4000K or 3000K/3500K/4000K | 22800 lm |
| | 39.37"+47.24"+31.50"+39.37"+31.50" | 240W | 2700K/3500K/4000K or 3000K/3500K/4000K | 28800 lm |
| | 47.24"+59.06"+39.37"+47.24"+39.37" | 290W | 2700K/3500K/4000K or 3000K/3500K/4000K | 34800 lm |
| | 59.06"+70.87"+47.24"+59.06"+47.24" | 340W | 2700K/3500K/4000K or 3000K/3500K/4000K | 40800 lm |

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

| PICTURE | MODEL NUMBER | DESCRIPTION |
|---|----------------|--|
|  | SB-EBP/5W/B | Factory installed Remote Emergency Battery Pack 5W 90 minutes |
| | SB-EBP/10.7W/B | Factory installed Remote Emergency Battery Pack 10.7W 90 minutes |
| | SB-EBP/17W/B | Factory installed Remote Emergency Battery Pack 17W 90 minutes |

RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

Get Smart


Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"

SB-U05A

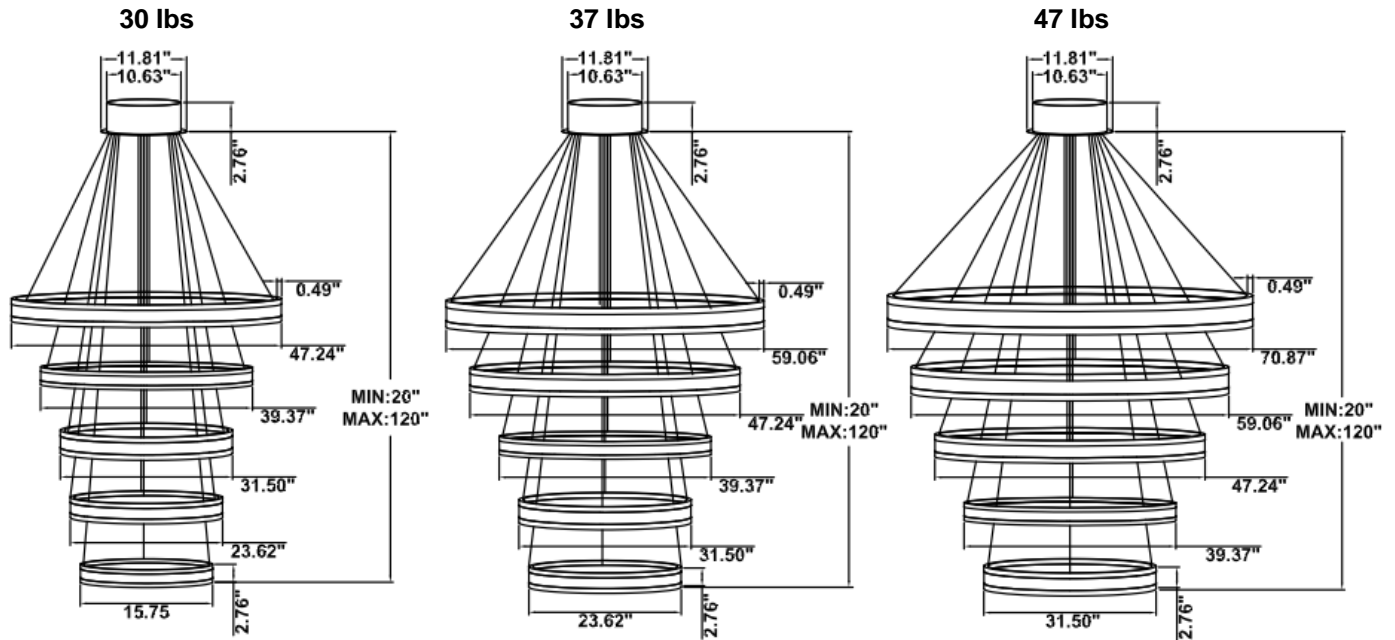


SB-U05B

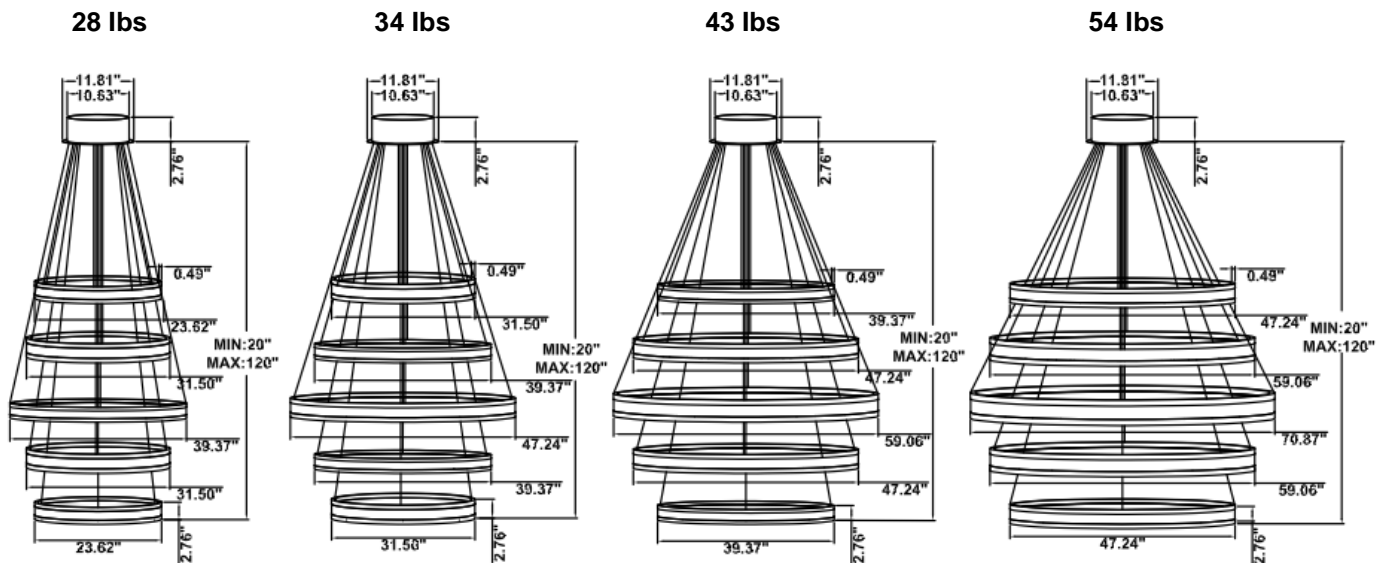


SB-U05C Remote driver: (Driver box size: L10.83" X W3.78" X H1.81")


28 lbs

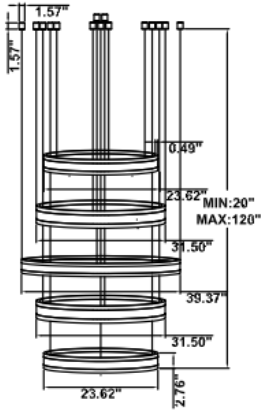


34 lbs

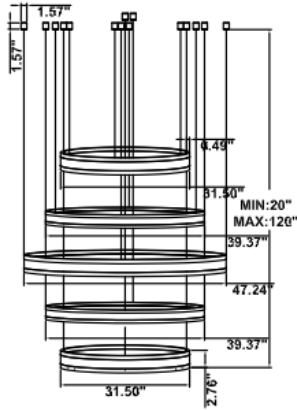

43 lbs

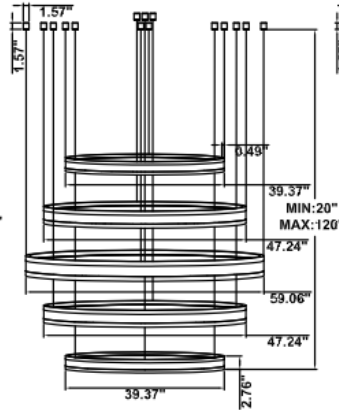


54 lbs

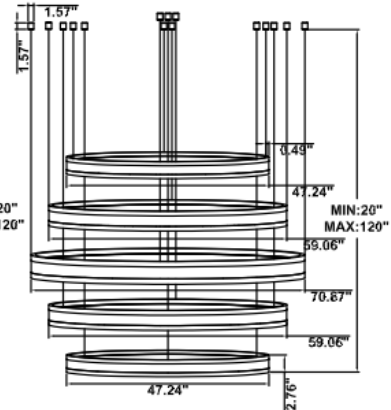


SB-U05D


26 lbs

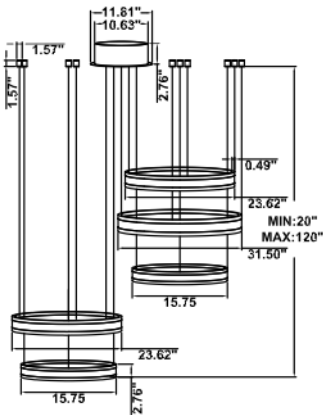


32 lbs

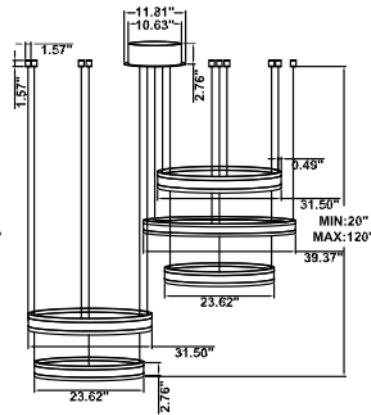


43 lbs

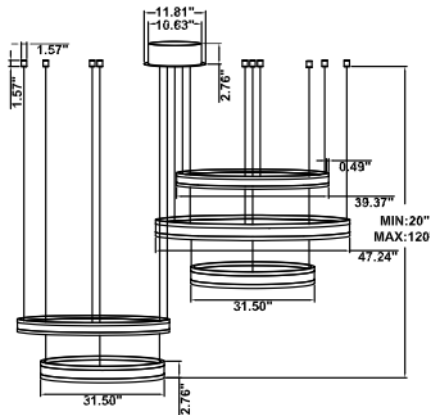

53 lbs

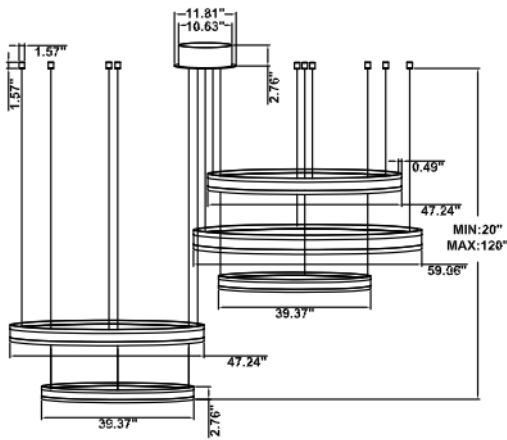


68 lbs

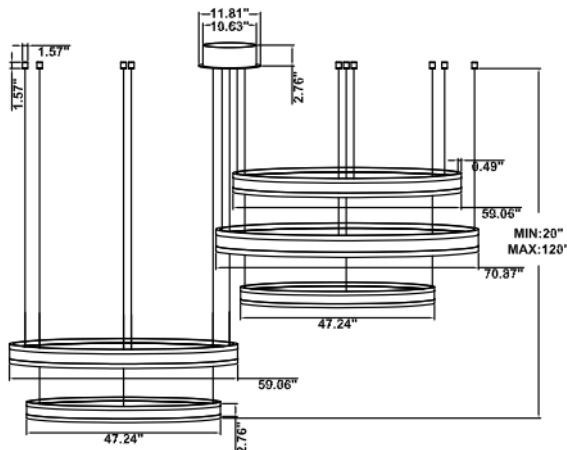


PHOTOMETRIC: Direct Illumination (Testing for single ring only)


15.75" 20W @ 4000K

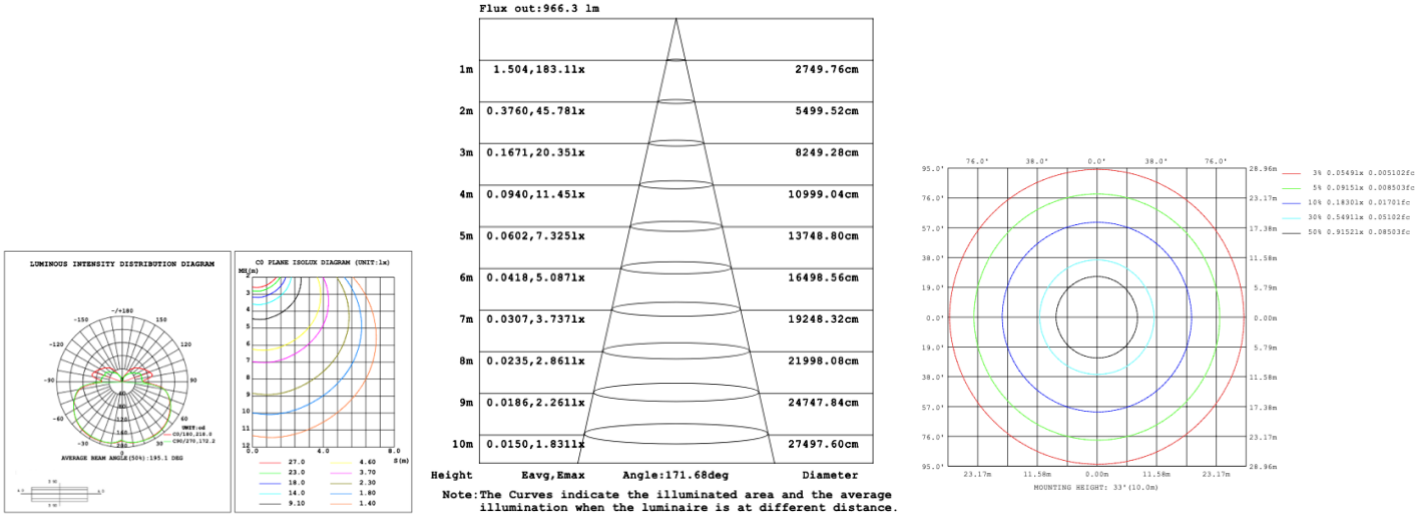


23.62" 30W @ 4000K

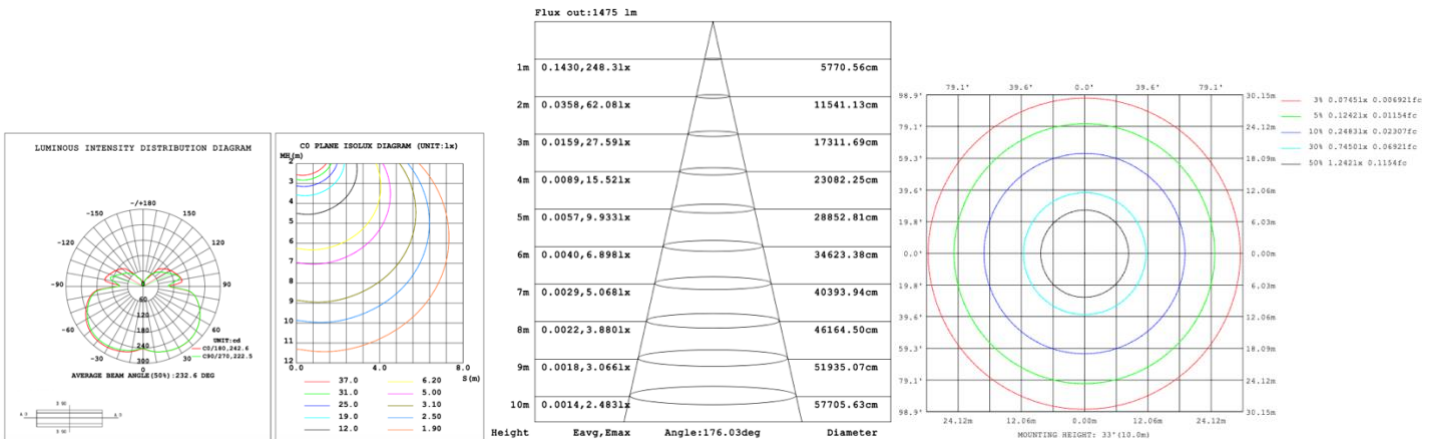


31.50" 40W @ 4000K

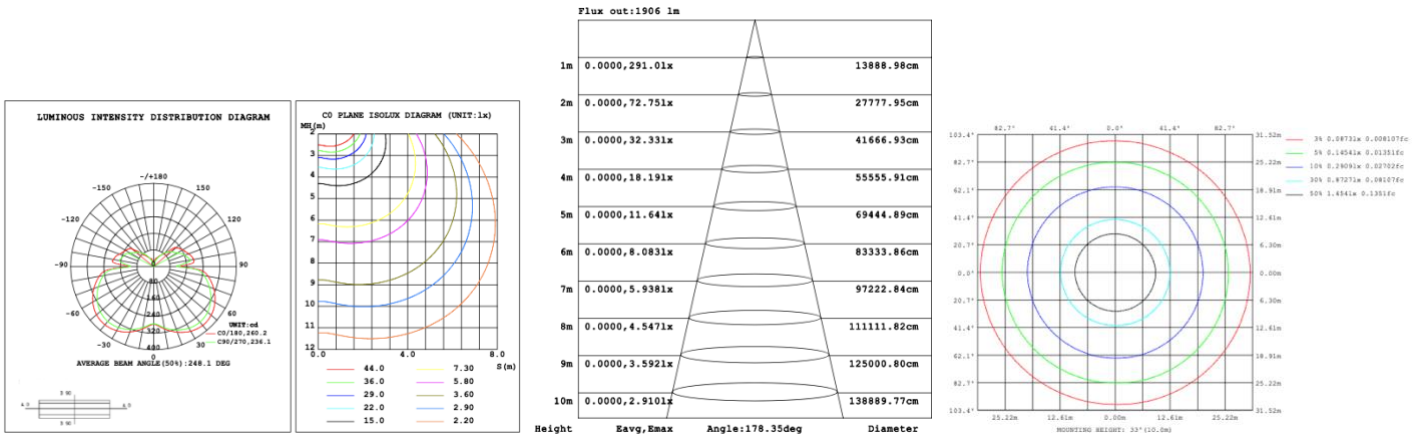


39.37" 50W @ 4000K

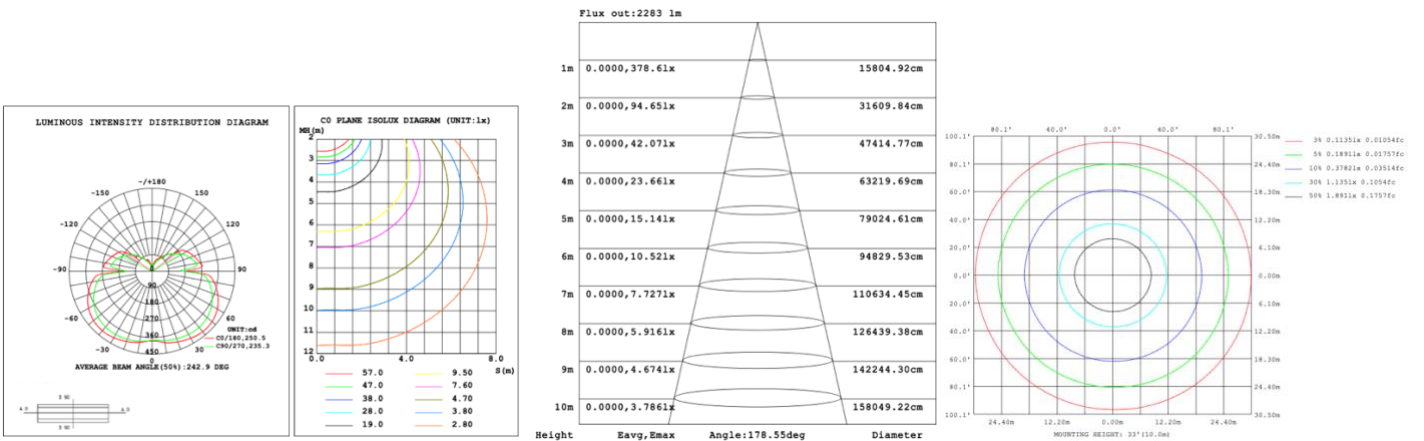

47.24" 60W @ 4000K

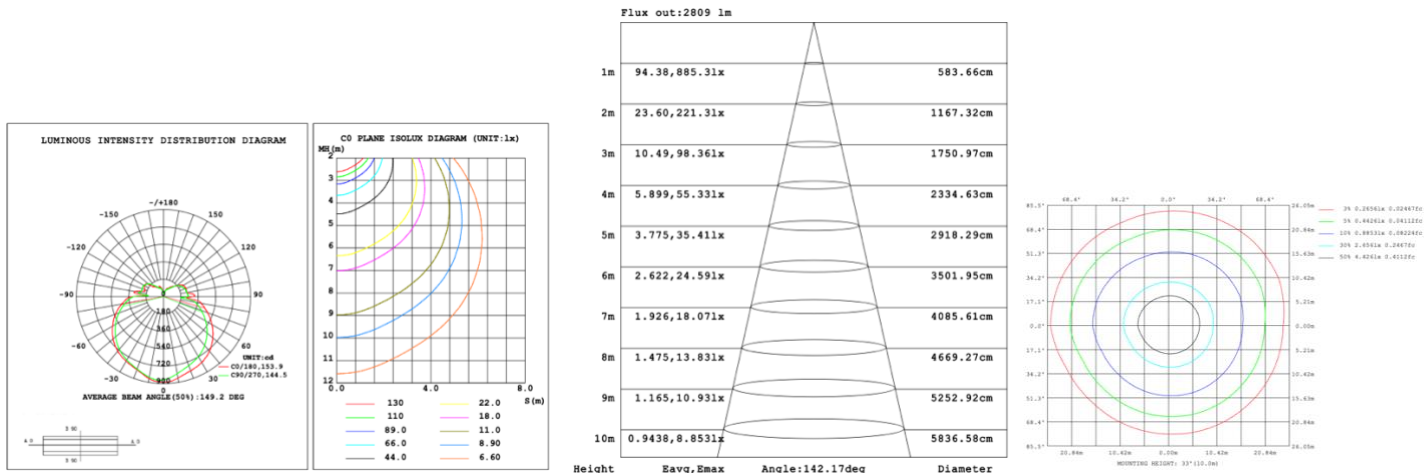

59.06" 70W @ 4000K

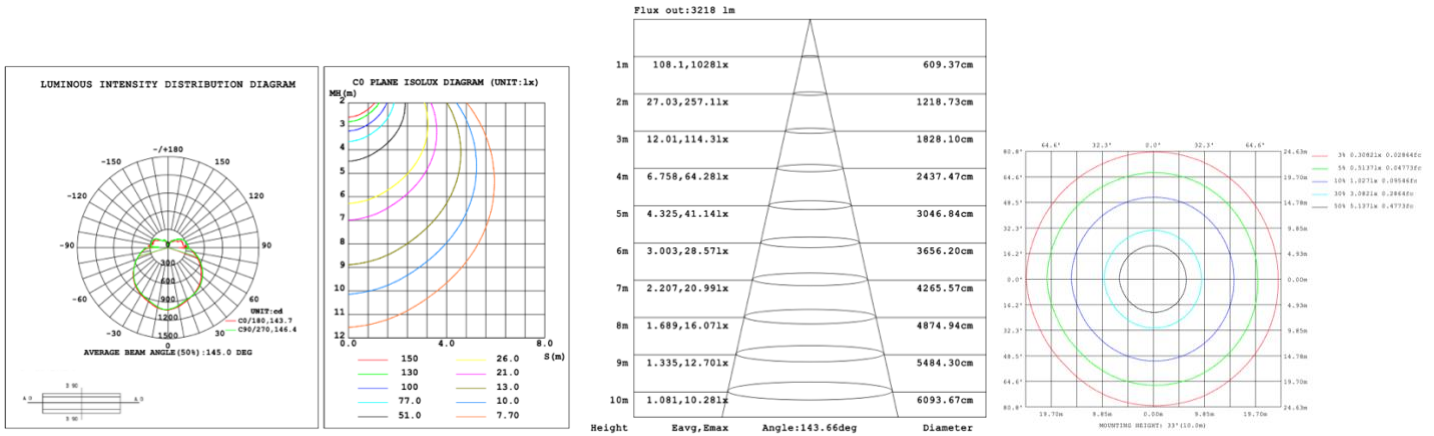

70.87" 80W @ 4000K

