



[View Aspen 6 tier on website](#)

[View Video](#)

[View application photo](#)

PRODUCT DESCRIPTION

Aspen circular pendants are made of extruded aluminum with direct and indirect lighting components using a glare free acrylic ring. Sizes range from 15.75" to 70.87" and can be combined as desired to create multiple ring masterpieces. Tunable white and RGBW. Over 6500 powder coated colors, ships assembled.

FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination direct/indirect.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- White frosted acrylic diffuser, Glare-free lens
- Fixture delivered lumens per watt ratio up to 120 LPW, 60 LPW direct, 60 LPW indirect, not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K. Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch



MODEL INFORMATION:

Example: SB-U06A270WSB

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-U06A	*270W=59.06"+47.24"+39.37"+31.50"+23.62"+15.57"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming	*B=Black Jack	*Blank=10' foot 120" (Standard)
	280W=70.87"+59.06"+47.24"+39.37"+31.50"+23.62"		L=ELV / Triac dimming	S=Platinum Silver	5'=5 foot 60"
SB-U06B SB-U06C	320W=39.37"+47.24"+59.06"+47.24"+39.37"+23.62"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	W=Gloss White	15'=15 foot 180"
	330W=39.37"+47.24"+59.06"+47.24"+39.37"+31.50"			O=Oil Rubbed Bronze	20'=20 foot 240"
	390W=47.24"+59.06"+70.87"+59.06"+47.24"+39.37"				25'=25 foot 300"
SB-U06D	180W=23.62"+31.5"+15.75"+31.5"+23.62"+15.75"	T=3K-4K Tunable White control by remote/wall control	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.		30'=30 foot 360"
	210W=31.50"+47.24"+15.75"+23.62"+15.75"+39.37"				
	330W=47.24"+59.06"+39.37"+47.24"+39.37"+31.50"	R3= RGB+3000K	C=Dali		
	380W=59.06"+70.87"+47.24"+59.06"+47.24"+31.50"	R4=RGB+4000K			
	390W=59.06"+70.87"+47.24"+59.06"+47.24"+39.37"				
Request price for other Kelvin temp and configurations			<p>.</p> <p>See control options</p>	<p>Find page 3 and 4 for color options or select from website</p> <p>Color Collections</p>	

STANDARD COLOR FINISHES



In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample, NFL football teams color or any RAL finish. Add Metallic, Sparkle, Transparent texture and originality to create a perfect custom products. Contact factory for quote.


SOLID TONE FINISH




SHIMMER / GLITTER FINISH



PALLEON METALLIC TEXTURE FINISH

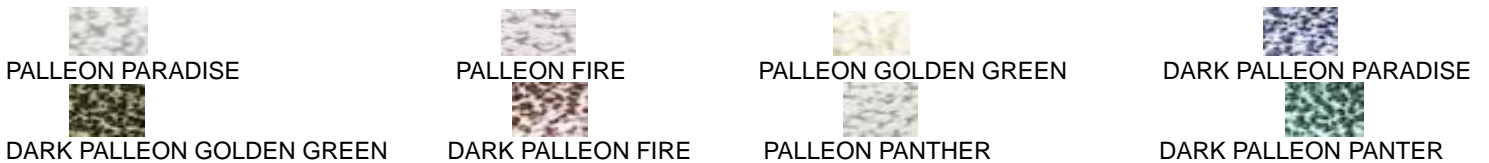

CHROME / SPECIALTY FINISH

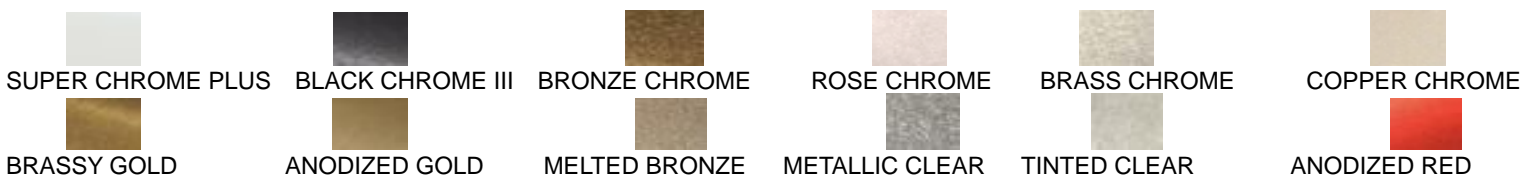

SPARKLE FINISH



WETSTON WRINKLED TEXTURE FINISH



LUMEN OUTPUT (for color selectable not RGBW)

Model Number	Size	Wattage	Kelvin Temp field Selectable ±500K	Delivered Lumen ±10%
SB-U06A	59.06"+47.24"+39.37"+31.50"+23.62"+15.57"	270W	2700K/3500K/4000K or 3000K/3500K/4000K	32400 lm
	70.87"+59.06"+47.24"+39.37"+31.50"+23.62"	280W	2700K/3500K/4000K or 3000K/3500K/4000K	33600 lm
SB-U06B/C	39.37"+47.24"+59.06"+47.24"+39.37"+23.62"	320W	2700K/3500K/4000K or 3000K/3500K/4000K	38400 lm
	39.37"+47.24"+59.06"+47.24"+39.37"+31.50"	330W	2700K/3500K/4000K or 3000K/3500K/4000K	39600 lm
	47.24"+59.06"+70.87"+59.06"+47.24"+39.37"	390W	2700K/3500K/4000K or 3000K/3500K/4000K	46800 lm
SB-U06D	23.62"+31.5"+15.75"+ 31.5"+23.62"+15.75"	180W	2700K/3500K/4000K or 3000K/3500K/4000K	21600 lm
	31.50"+47.24"+15.75"+23.62"+15.75"+39.37"	210W	2700K/3500K/4000K or 3000K/3500K/4000K	25200 lm
	47.24"+59.06"+39.37"+ 47.24"+39.37"+31.50"	330W	2700K/3500K/4000K or 3000K/3500K/4000K	39600 lm
	59.06"+70.87"+47.24"+59.06"+47.24"+31.50"	380W	2700K/3500K/4000K or 3000K/3500K/4000K	45600 lm
	59.06"+70.87"+47.24"+59.06"+47.24"+39.37"	390W	2700K/3500K/4000K or 3000K/3500K/4000K	46800 lm

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)


PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"


SB-U06A

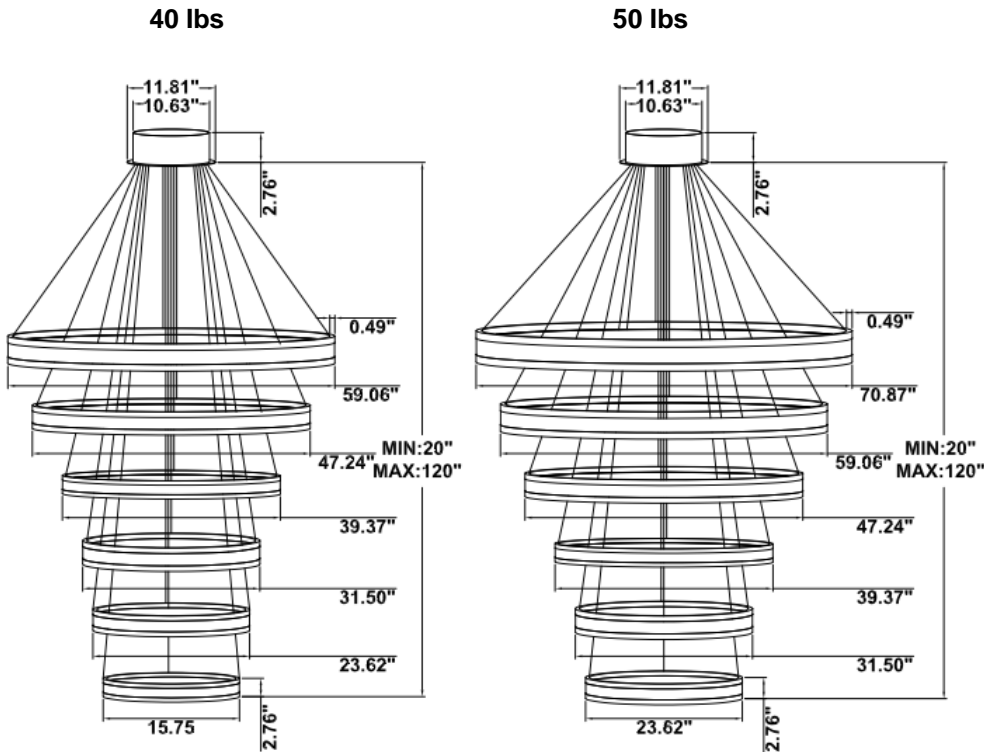


SB-U06B

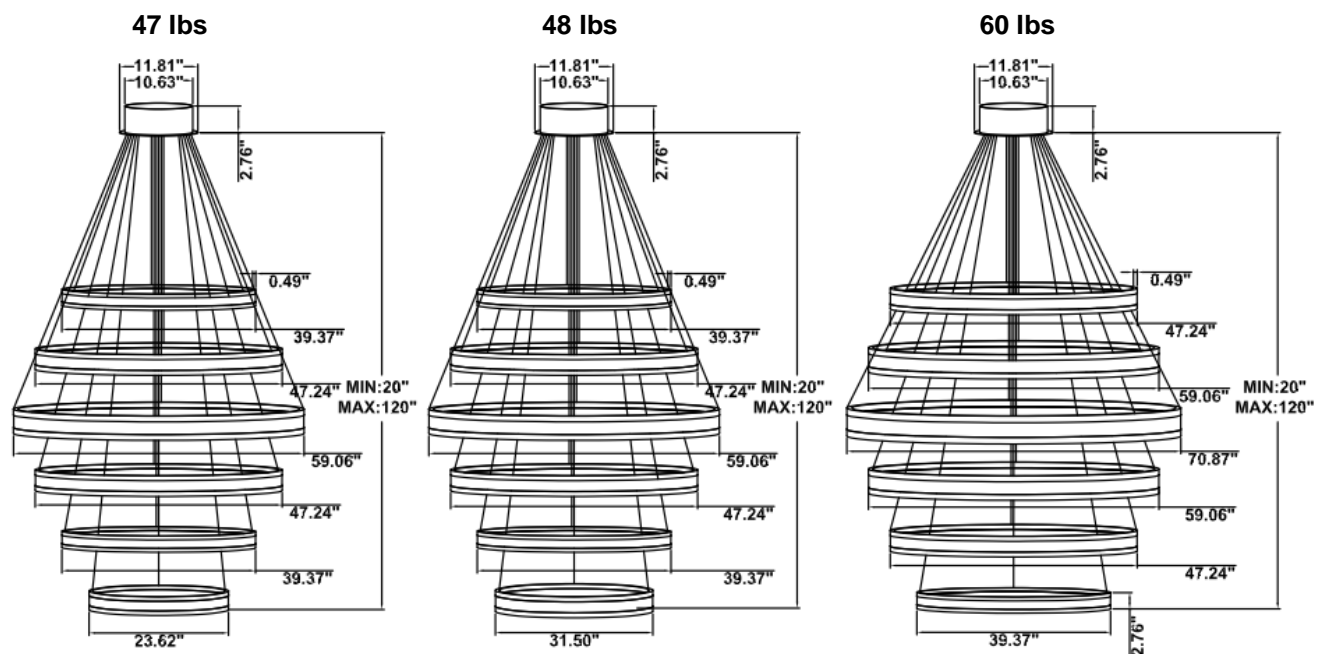

SB-U06C

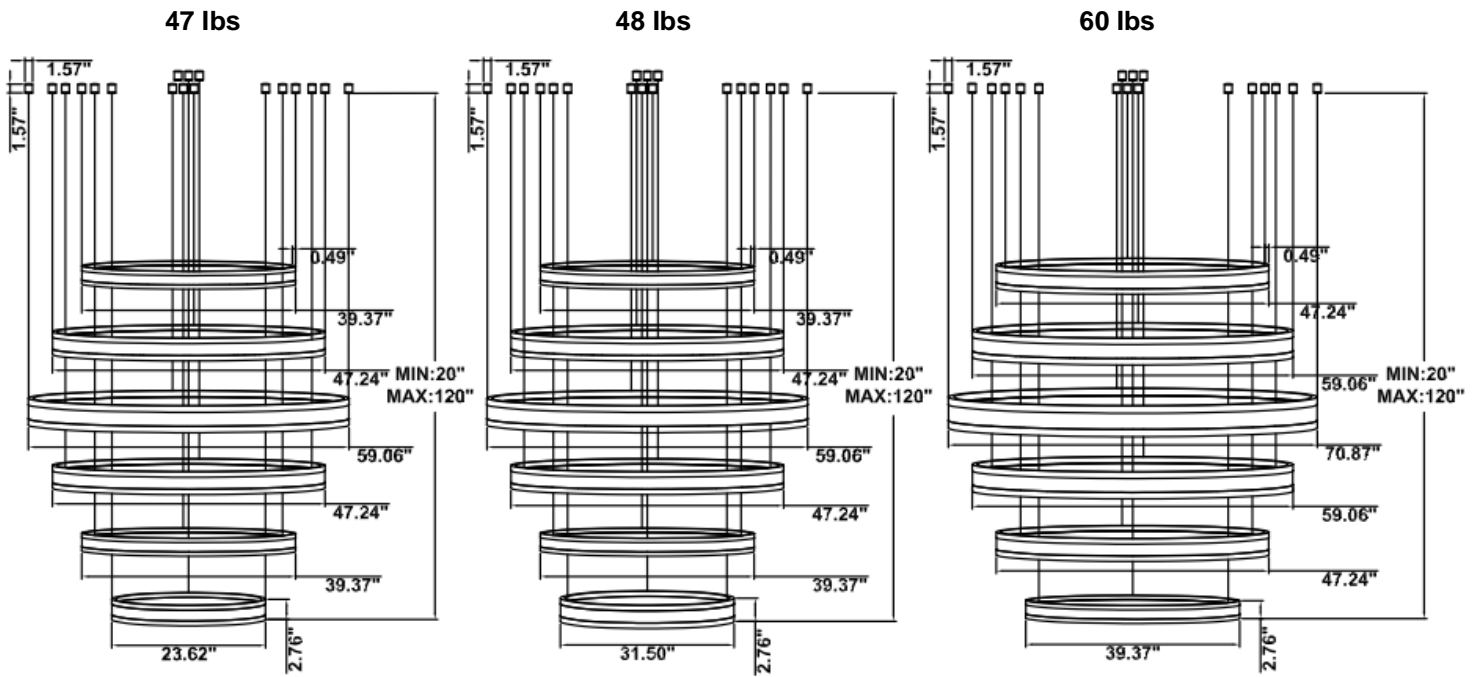



SB-U06D

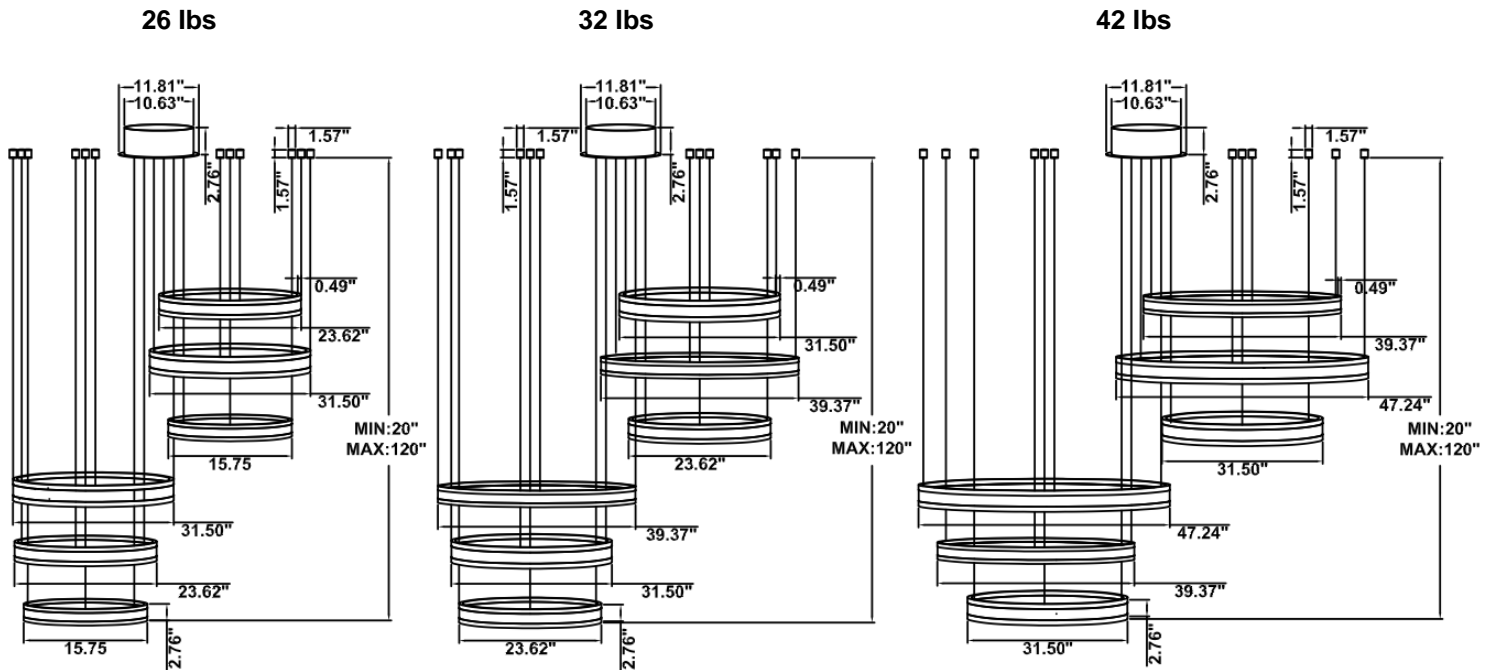

SB-U06D


53 lbs

67 lbs

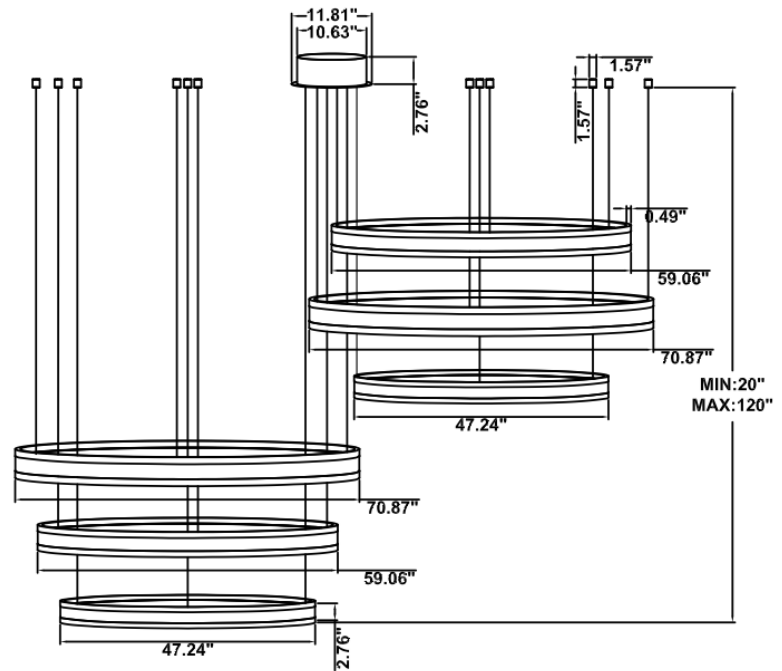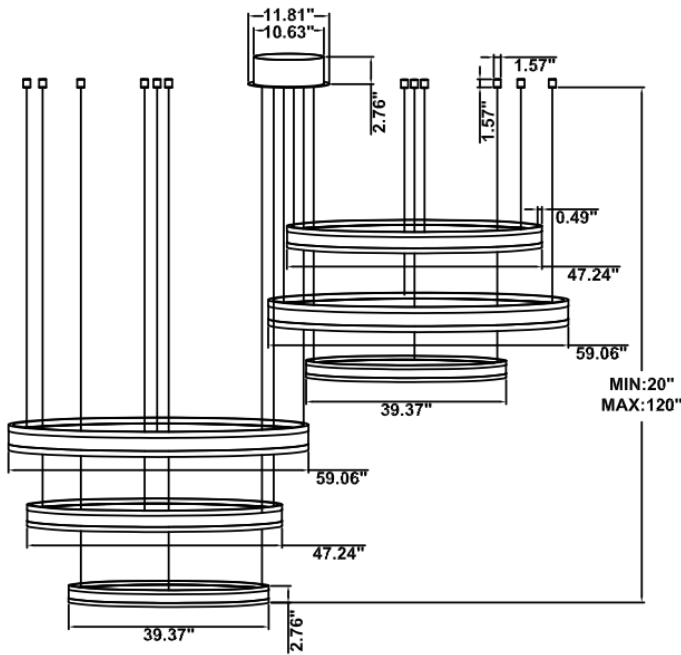


PHOTOMETRIC: Direct Illumination (Testing for single ring only)


15.75" 20W @ 4000K

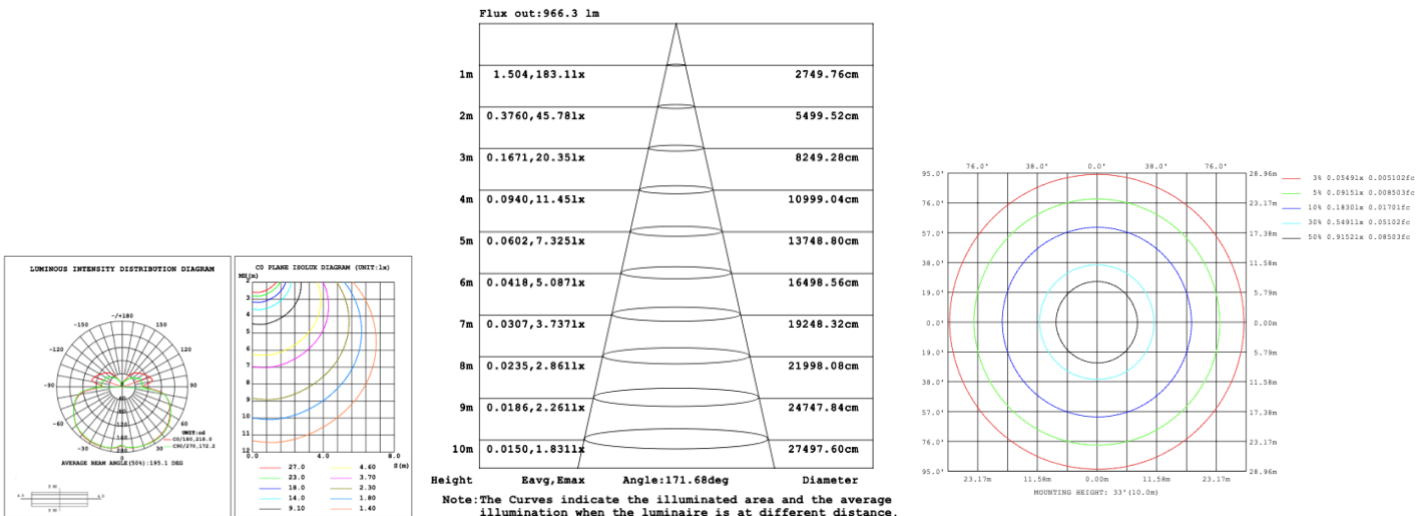


23.62" 30W @ 4000K

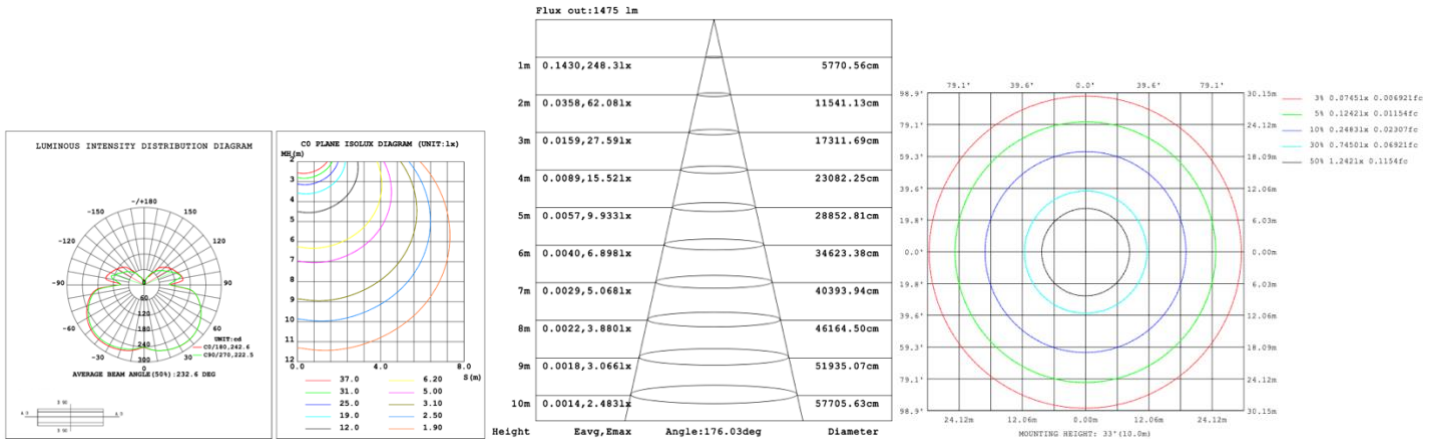





31.50" 40W @ 4000K

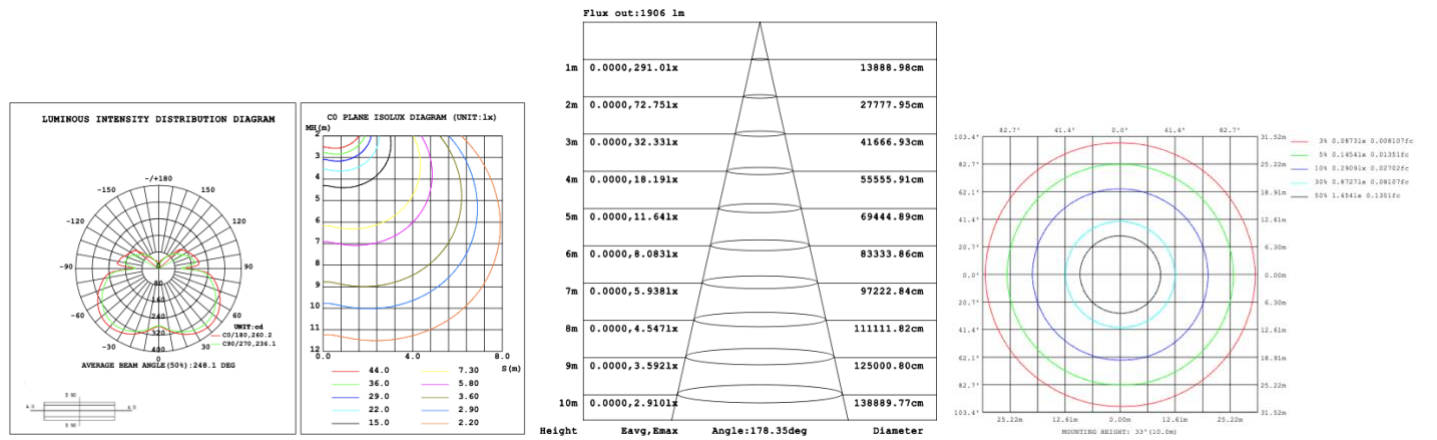





39.37" 50W @ 4000K

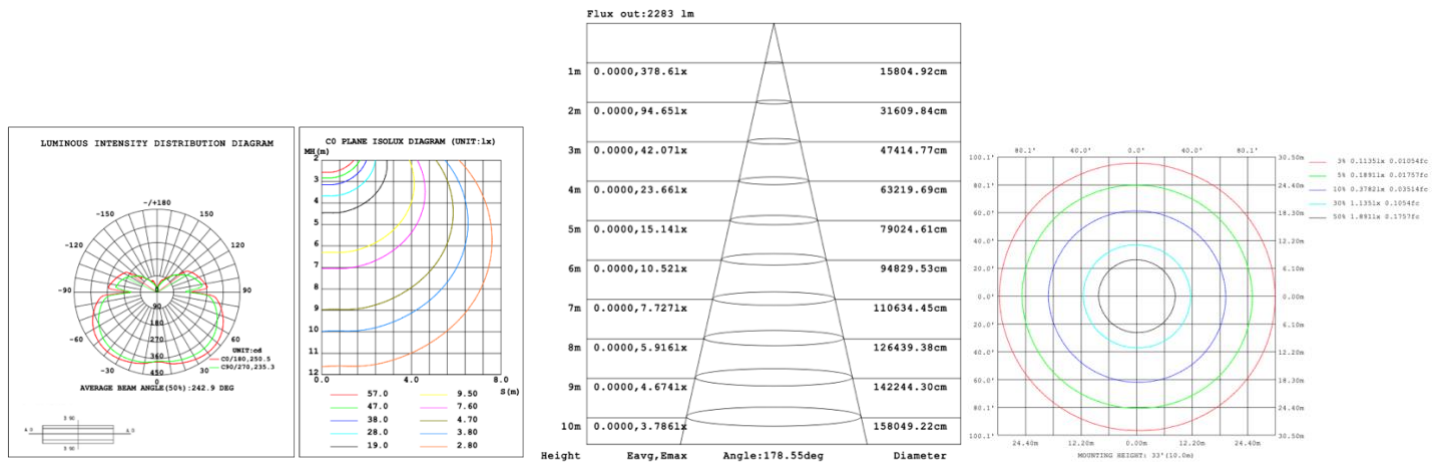

47.24" 60W @ 4000K

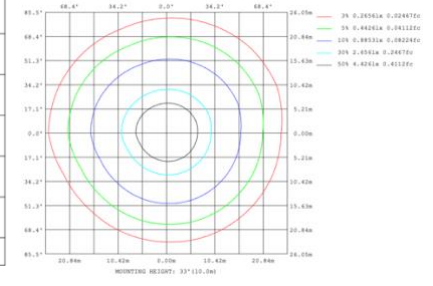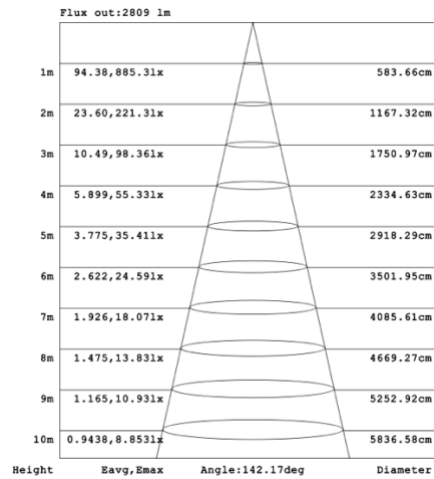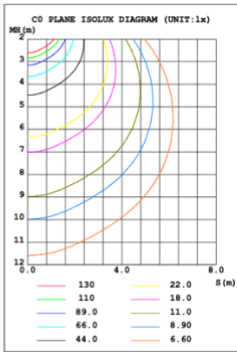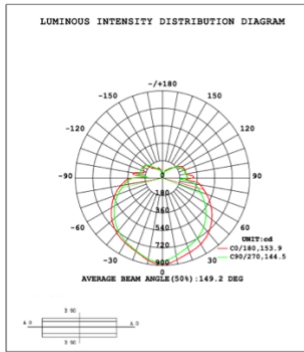

59.06" 70W @ 4000K

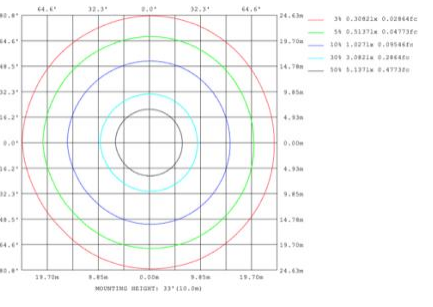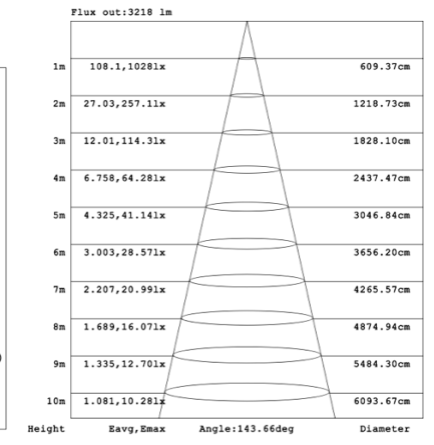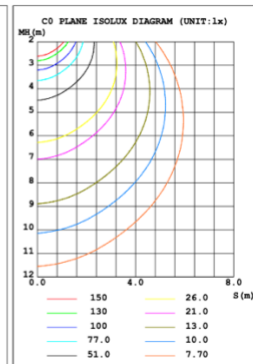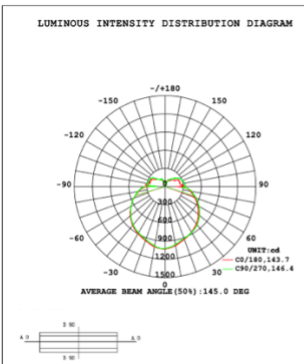

70.87" 80W @ 4000K

