



[View Bromont 4 tier on website](#)

[View Video](#)

[View application photos](#)

PRODUCT DESCRIPTION

The **Bromont** circular pendants are made of extruded aluminum with a direct/ Indirect component and a glare free flash lens. Sizes range from 15.57" to 70.87" and can be combined as desired to create multiple ring masterpieces. Tunable white and RGBW. Over 6500 powder coated colors, ships assembled.

FEATURES



- 5-year limited warranty.
- Ships assembled.
- Illumination direct/Indirect.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- Lens: White frosted acrylic diffuser, Glare-free
- Fixture delivered lumens per watt ratio up to 82 LPW, 41 LPW direct, 41 LPW indirect, not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K ; Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch

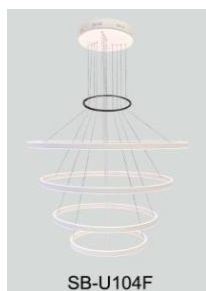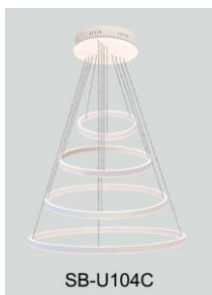

MODEL INFORMATION:

Example: SB-U104A140WSB

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-U104A SBU104F	*140W=39.37"+31.50"+23.62"+15.57"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming	*B=Black Jack	*Blank=10' foot 120" (Standard)
	220W=59.06"+47.24"+39.37"+31.50"		L=ELV / Triac dimming	S=Platinum Silver	5'=5 foot 60"
	260W=70.87"+59.06"+47.24"+39.37"		D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	W=Gloss White	15'=15 foot 180"
SB-U104B SB-U104C	140W=39.37"+31.50"+23.62"+15.57"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	O=Oil Rubbed Bronze	20'=20 foot 240"
	220W=59.06"+47.24"+39.37"+31.50"		C=Dali		25'=25 foot 300"
	260W=70.87"+59.06"+47.24"+39.37"	T=3K-4K Tunable White control by remote/wall control R3= RGB+3000K			30'=30 foot 360"
SB-U104D	140W=39.37"+31.50"+23.62"+15.57"	R4=RGB+4000K	See control options	Find page 3 for color options or select from website Color Collections	
	220W=59.06"+47.24"+39.37"+31.50"	Request price for other Kelvin temp and configurations			
	220W=59.06"+47.24"+39.37"+31.50"				
	260W=70.87"+59.06"+47.24"+39.37"				

STANDARD COLOR FINISHES




In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample, NFL football teams color or any RAL finish. Add Metallic, Sparkle, Transparent texture and originality to create a perfect custom products.


SOLID TONE FINISH



SHIMMER / GLITTER FINISH



PALLEON METALLIC TEXTURE FINISH

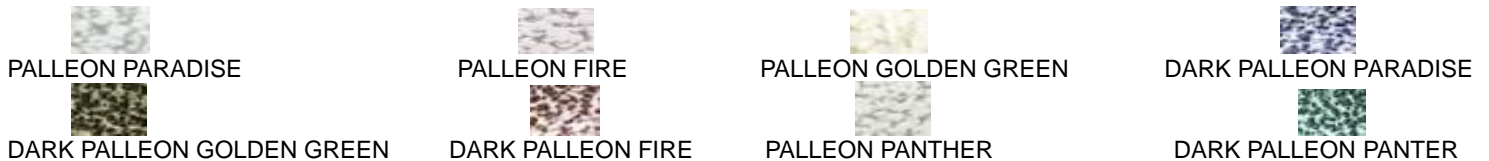

CHROME / SPECIALTY FINISH



SPARKLE FINISH



WETSTON WRINKLED TEXTURE FINISH




LUMEN OUTPUT (for color selectable not RGBW)

Model Number	Size	Wattage	Kelvin Temp field Selectable $\pm 500K$	Delivered Lumen $\pm 10\%$
SB-U104A/B/C/D/F	39.37"+31.50"+23.62"+15.57"	140W	2700K/3500K/4000K or 3000K/3500K/4000K	11480 lm
	59.06"+47.24"+39.37"+31.50"	220W	2700K/3500K/4000K or 3000K/3500K/4000K	18040 lm
	70.87"+59.06"+47.24"+39.37"	260W	2700K/3500K/4000K or 3000K/3500K/4000K	21320 lm

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)


PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"


SB-U104A Canopy mount

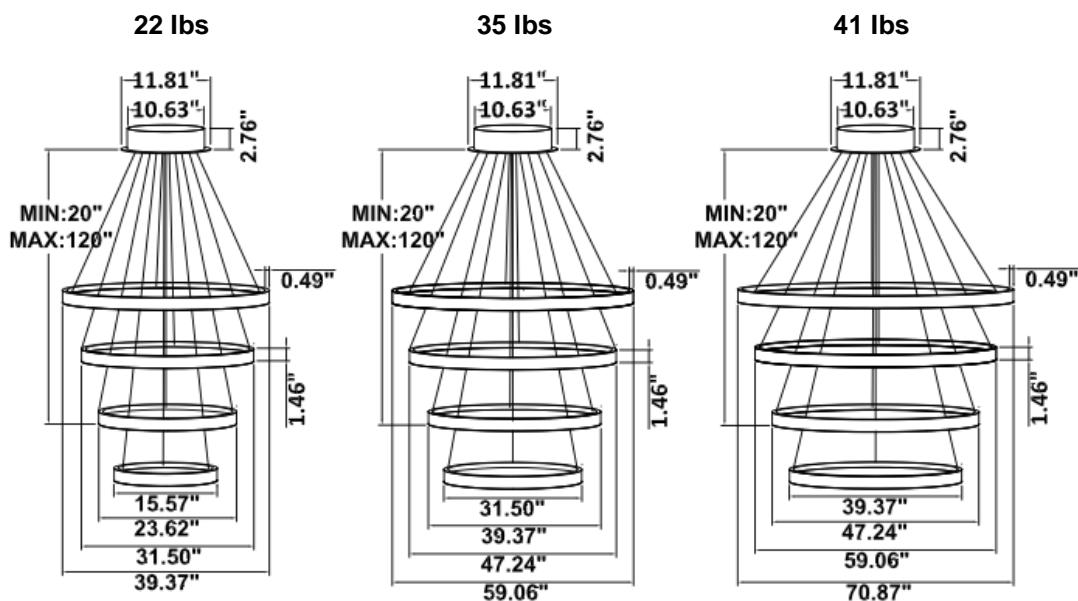


SB-U104B Canopy mount with accent ring

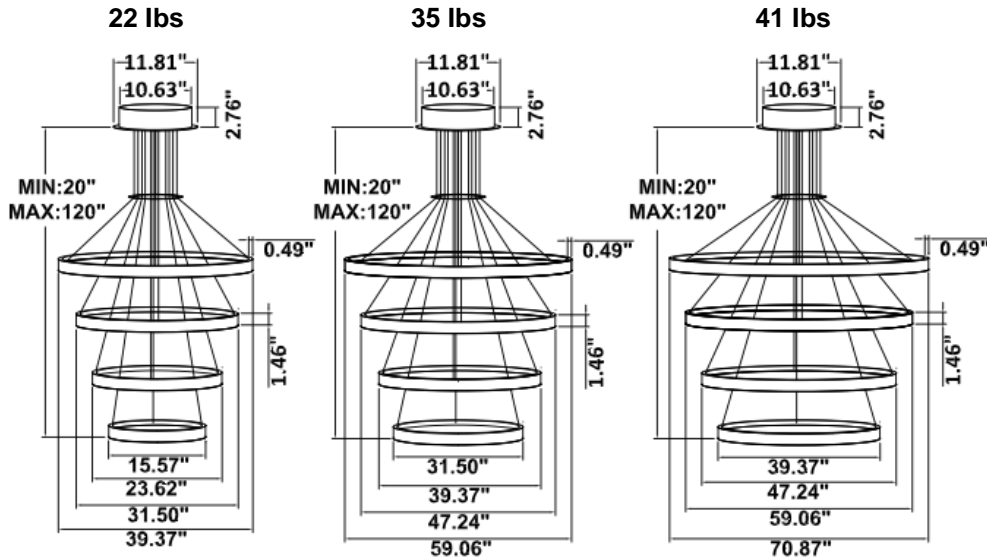


SB-U104C Canopy mount

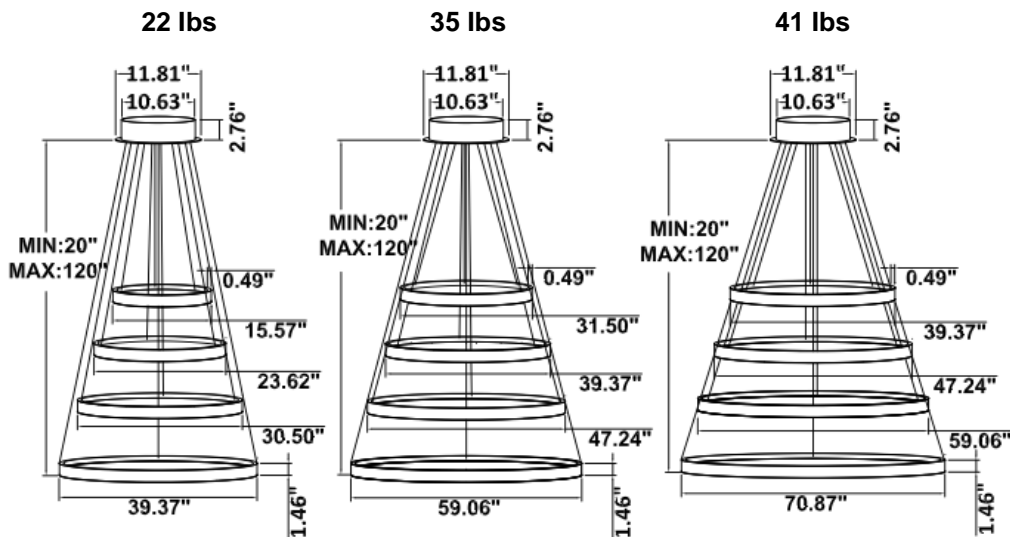

SB-U104D Canopy mount and cables fixed directly in the ceiling

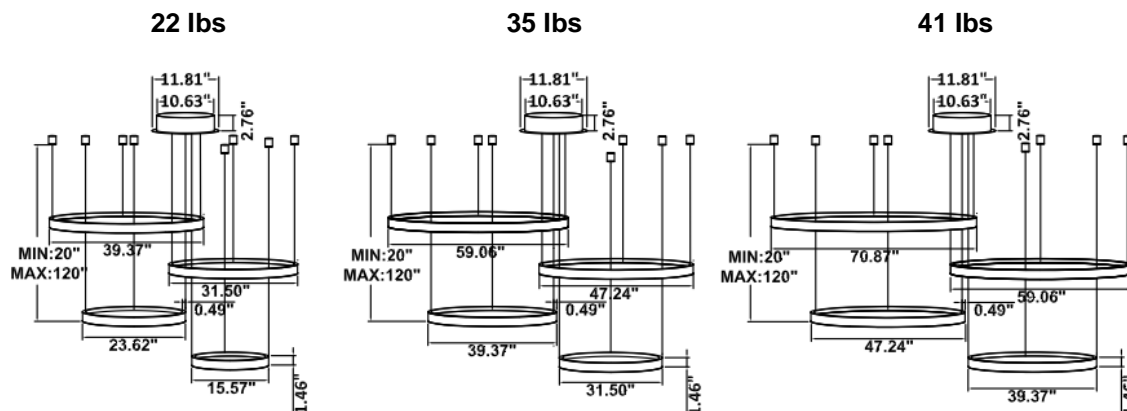


SB-U104F Canopy mount with accent ring

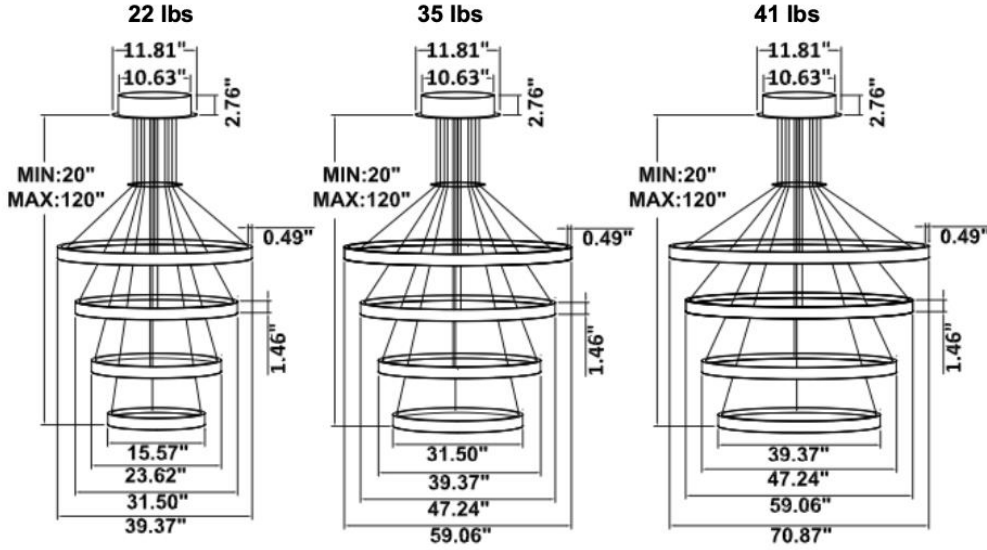


PHOTOMETRIC: Testing for single ring and direct only




15.75" 20W @ 4000K

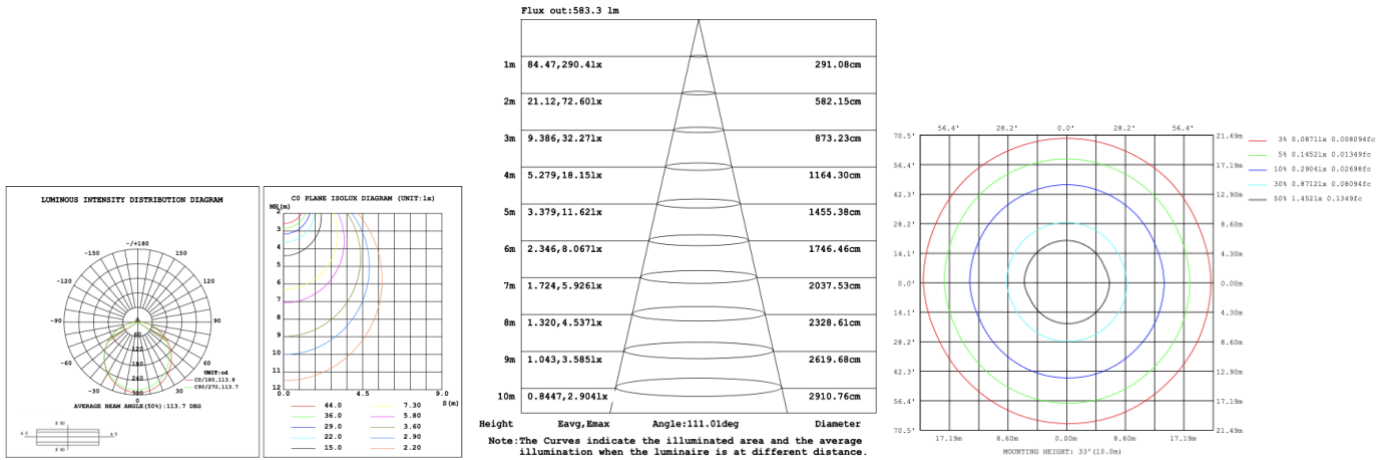




23.62" 30W @ 4000K

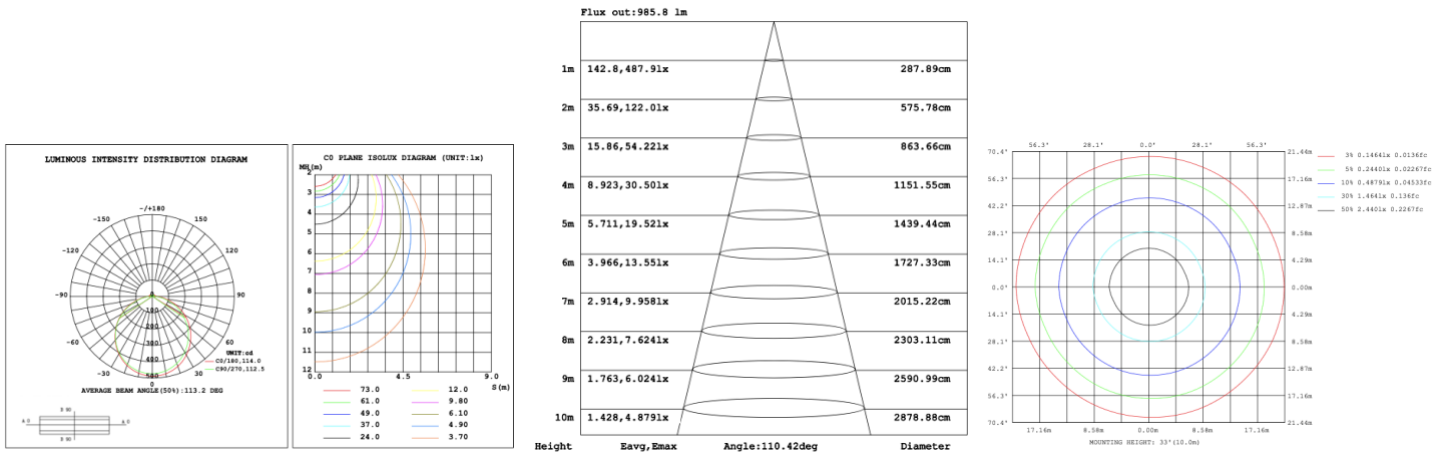




31.50" 40W @ 4000K

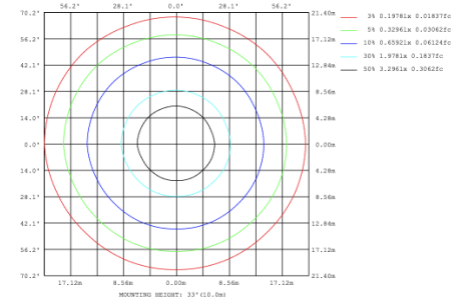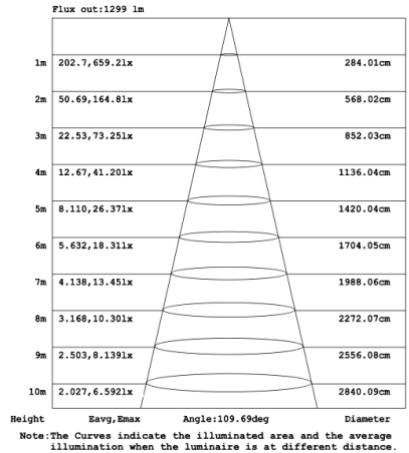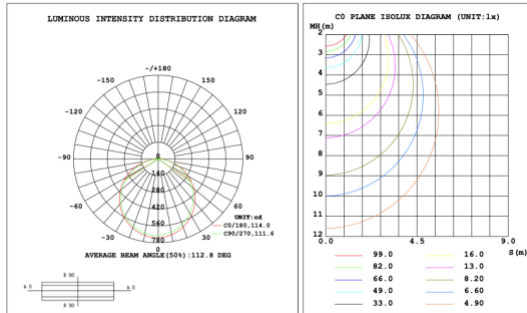




39.37" 50W @ 4000K

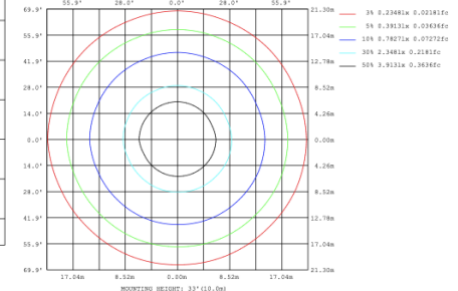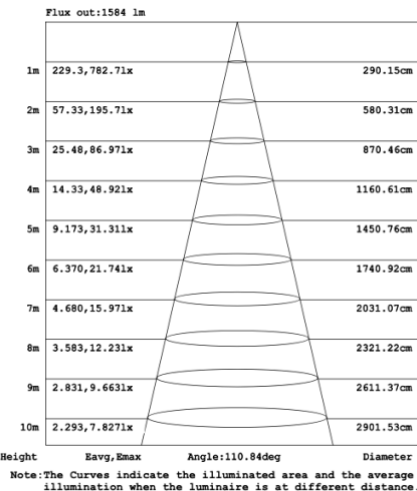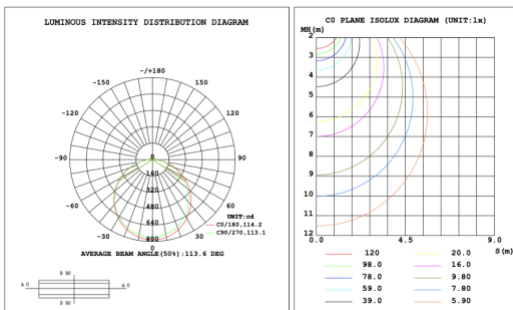

47.24" 60W @ 4000K

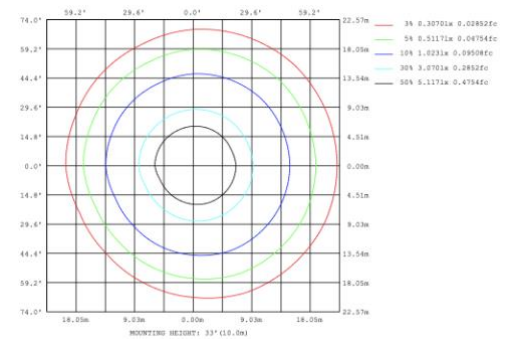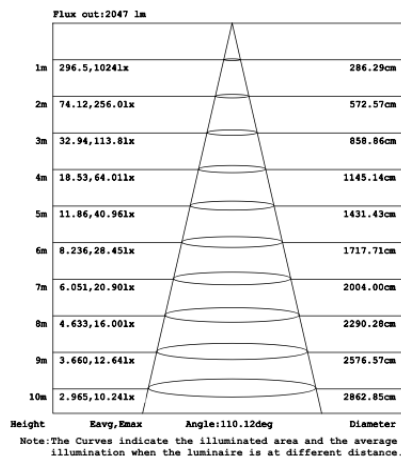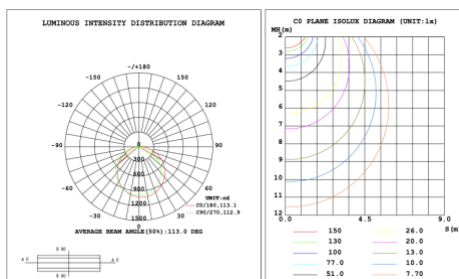

59.06" 70W @ 4000K

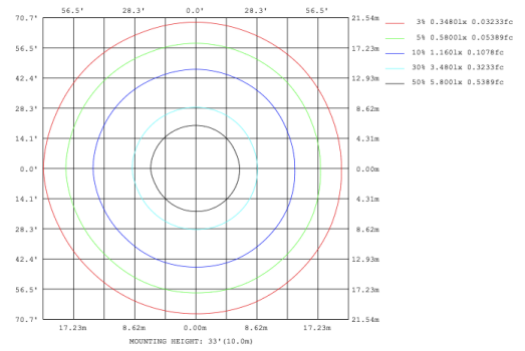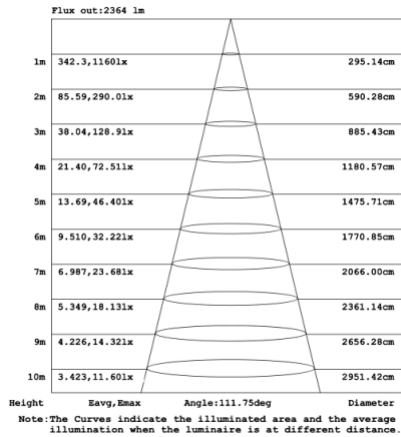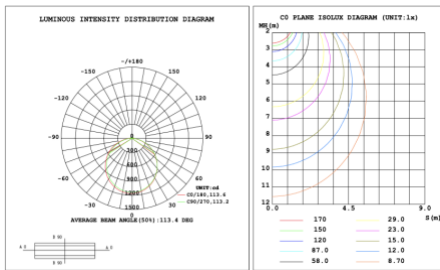

70.87" 80W @ 4000K

