



[View Bromont 5 tier on website](#)

[View Video](#)

[View application photos](#)

PRODUCT DESCRIPTION

The **Bromont** circular pendants are made of extruded aluminum with a direct/ Indirect component and a glare free flash lens. Sizes range from 15.57" to 70.87" and can be combined as desired to create multiple ring masterpieces. Tunable white and RGBW. Over 6500 powder coated colors, ships assembled.

FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination direct/Indirect.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- Lens: White frosted acrylic diffuser, Glare-free
- Fixture delivered lumens per watt ratio up to 82 LPW, 41 LPW direct, 41 LPW indirect, not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 2700K/3500K/4000K ; Or 3000K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch



MODEL INFORMATION:

Example: SB-U105A200WSB

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-U105A	*200W=47.24"+39.37"+31.50"+23.62"+15.57"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming	*B=Black Jack	*Blank=10' foot 120" (Standard)
	250W=59.06"+47.24"+39.37"+31.50"+23.62"		L=ELV / Triac dimming	S=Platinum Silver	5'=5 foot 60"
	300W=70.87"+59.06"+47.24"+39.37"+31.50"		D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	W=Gloss White	15'=15 foot 180"
SB-U105B SB-U105D	190W=23.62"+31.50"+39.37"+31.50"+23.62"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	O=Oil Rubbed Bronze	20'=20 foot 240"
	240W=31.50"+39.37"+47.24"+39.37"+31.50"				25'=25 foot 300"
	290W=39.37"+47.24"+59.06"+47.24"+39.37"	T=3K-4K Tunable White control by remote/wall control	C=Dali	30'=30 foot 360"	
	340W=47.24"+59.06"+70.87"+59.06"+47.24"	R3= RGB+3000K			
SB-U105C	140W=23.62"+31.50"+15.75"+23.62"+15.75"	R4=RGB+4000K			
	190W=31.50"+39.37"+23.62"+31.50"+23.62"				
	190W=31.50"+47.24"+15.75"+23.62"+39.37"				
	240W=39.37"+47.24"+31.50"+39.37"+31.50"				
	290W=47.24"+59.06"+39.37"+47.24"+39.37"	Request price for other Kelvin temp and configurations	See control options	Find page 3 for color options or select from website Color Collections	
	340W=59.06"+70.87"+47.24"+59.06"+47.24"				

STANDARD COLOR FINISHES



In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample, NFL football teams color or any RAL finish. Add Metallic, Sparkle, Transparent texture and originality to create a perfect custom products. Contact factory for quote.


SOLID TONE FINISH



SHIMMER / GLITTER FINISH



PALLEON METALLIC TEXTURE FINISH

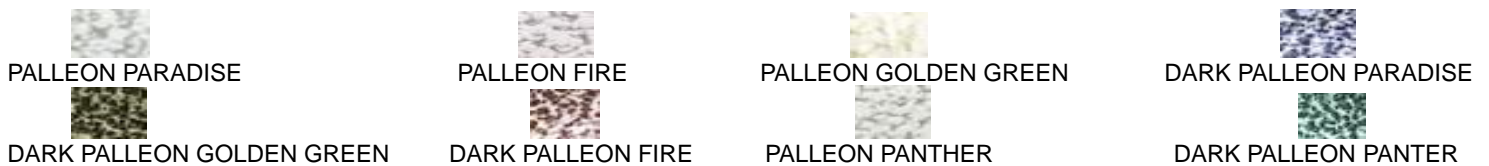

CHROME / SPECIALTY FINISH



SPARKLE FINISH



WETSTON WRINKLED TEXTURE FINISH




LUMEN OUTPUT (for color selectable not RGBW)

Model Number	Size	Wattage	Kelvin Temp field Selectable $\pm 500K$	Delivered Lumen $\pm 10\%$
SB-U105A	47.24"+39.37"+31.50"+23.62"+15.57"	200W	2700K/3500K/4000K or 3000K/3500K/4000K	16400 lm
	59.06"+47.24"+39.37"+31.50"+23.62"	250W	2700K/3500K/4000K or 3000K/3500K/4000K	20500 lm
	70.87"+59.06"+47.24"+39.37"+31.50"	300W	2700K/3500K/4000K or 3000K/3500K/4000K	24600 lm
SB-U105B/D	23.62"+31.50"+39.37"+31.50"+23.62"	190W	2700K/3500K/4000K or 3000K/3500K/4000K	15580 lm
	31.50"+39.37"+47.24"+39.37"+31.50"	240W	2700K/3500K/4000K or 3000K/3500K/4000K	19680 lm
	39.37"+47.24"+59.06"+47.24"+39.37"	290W	2700K/3500K/4000K or 3000K/3500K/4000K	23780 lm
	47.24"+59.06"+70.87"+59.06"+47.24"	340W	2700K/3500K/4000K or 3000K/3500K/4000K	27880 lm
SB-U105C	23.62"+31.50"+15.75"+23.62"+15.75"	140W	2700K/3500K/4000K or 3000K/3500K/4000K	11480 lm
	31.50"+39.37"+23.62"+31.50"+23.62"	190W	2700K/3500K/4000K or 3000K/3500K/4000K	15580 lm
	39.37"+47.24"+31.50"+39.37"+31.50"	240W	2700K/3500K/4000K or 3000K/3500K/4000K	19680 lm
	31.50"+47.24"+15.75"+23.62"+39.37"	190W	2700K/3500K/4000K or 3000K/3500K/4000K	15580 lm
	47.24"+59.06"+39.37"+47.24"+39.37"	290W	2700K/3500K/4000K or 3000K/3500K/4000K	23780 lm
	59.06"+70.87"+47.24"+59.06"+47.24"	340W	2700K/3500K/4000K or 3000K/3500K/4000K	27880 lm

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

Get Smart


Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"

SB-U105A Canopy mount

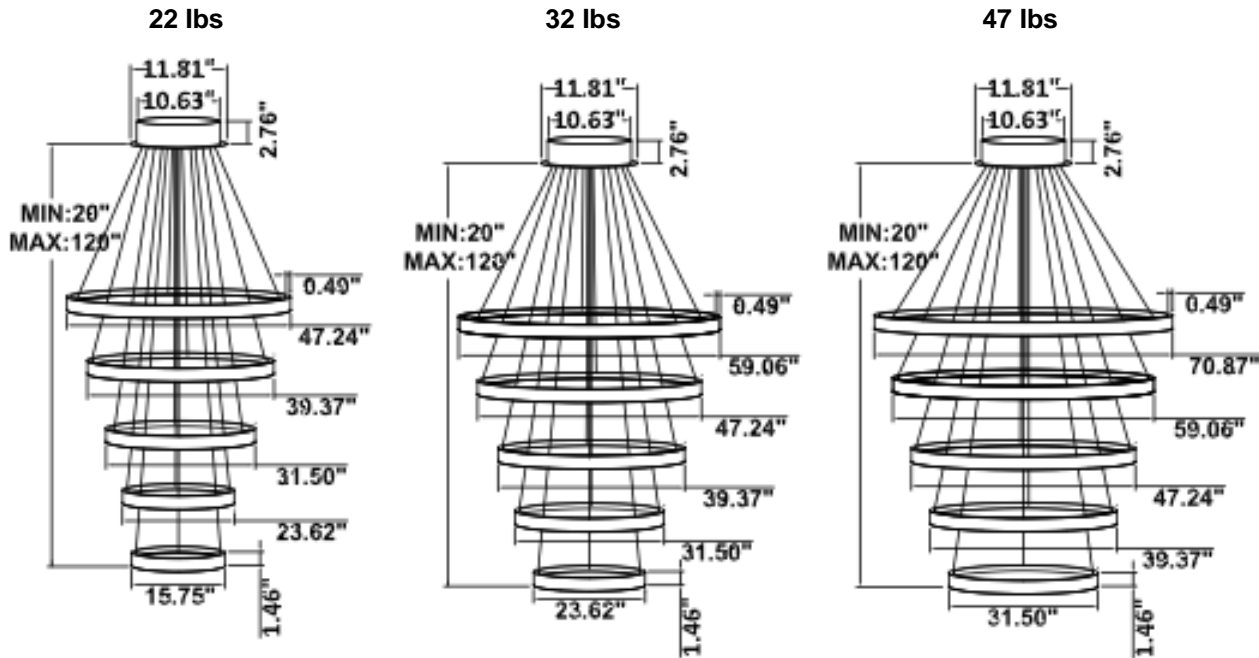


SB-U105B Canopy mount

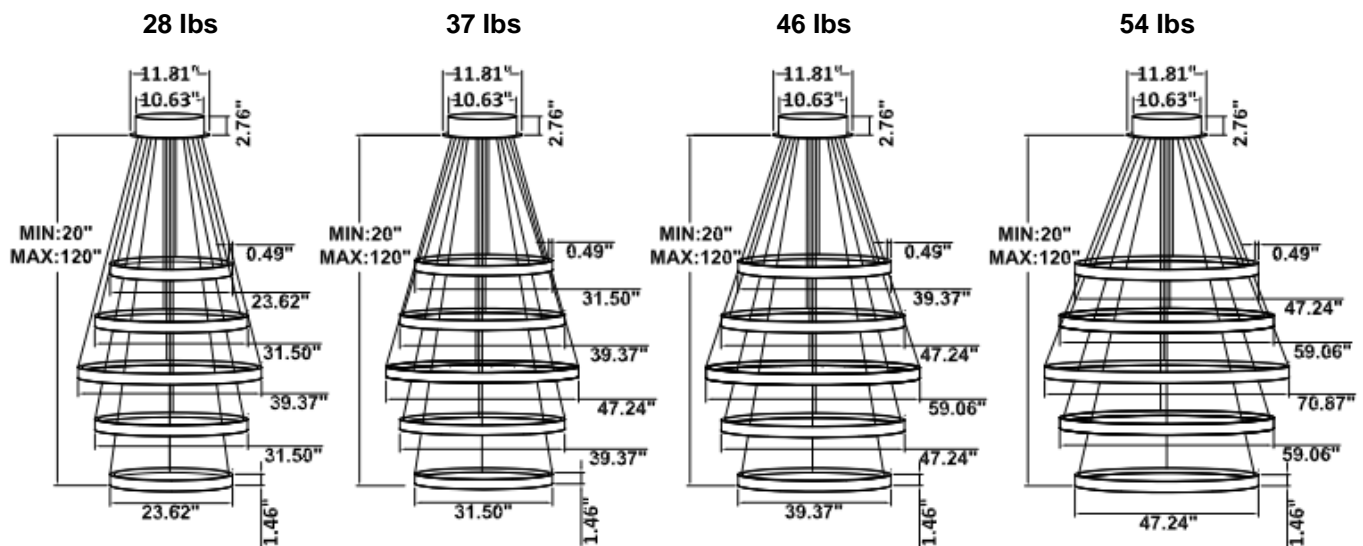


SB-U105C Canopy mount

29 lbs

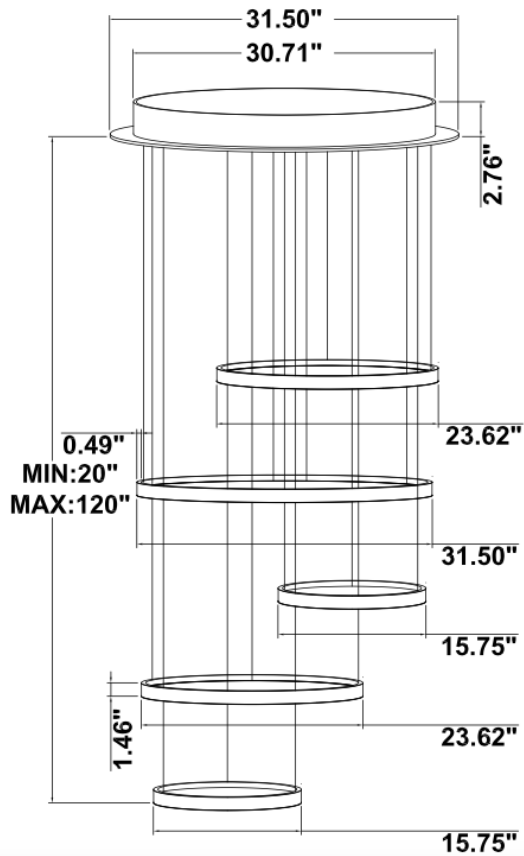


34 lbs

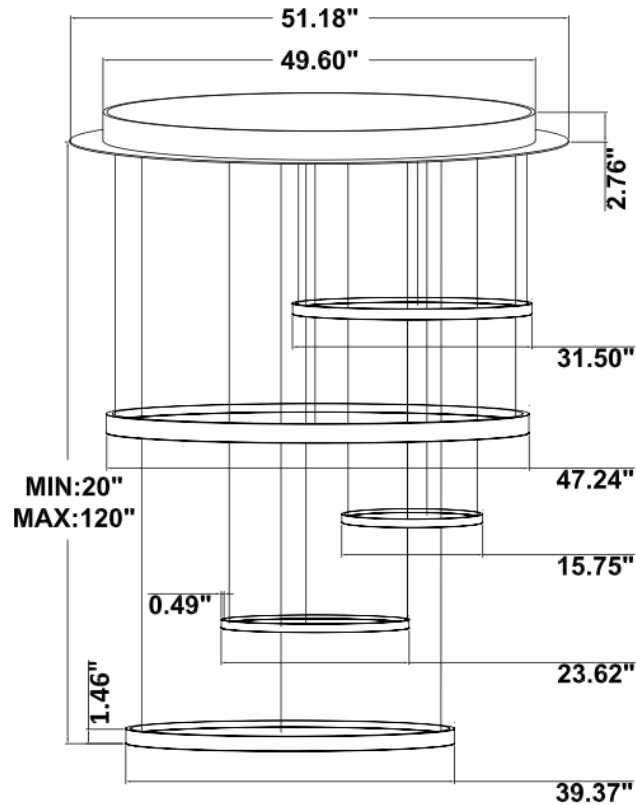


Canopy mount and cables fixed directly in the ceiling

34 lbs

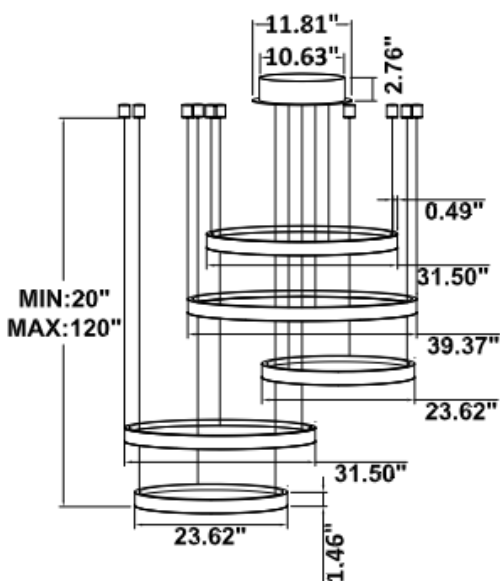


39 lbs

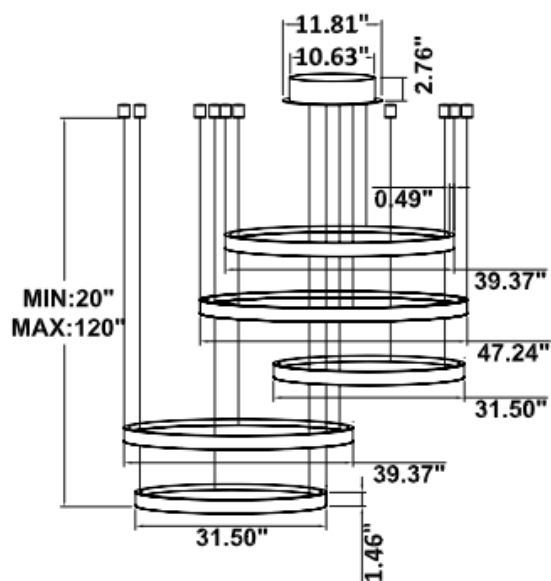

Canopy mount and cables fixed directly in the ceiling

47 lbs

55 lbs

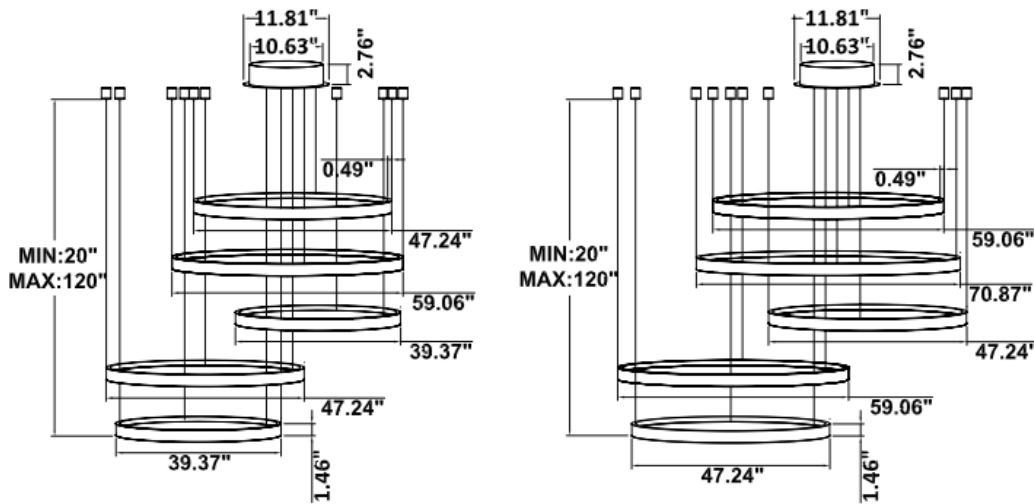


SB-U105D Remote mount and cables fixed directly in the ceiling

28 lbs

37 lbs


46 lbs

54 lbs




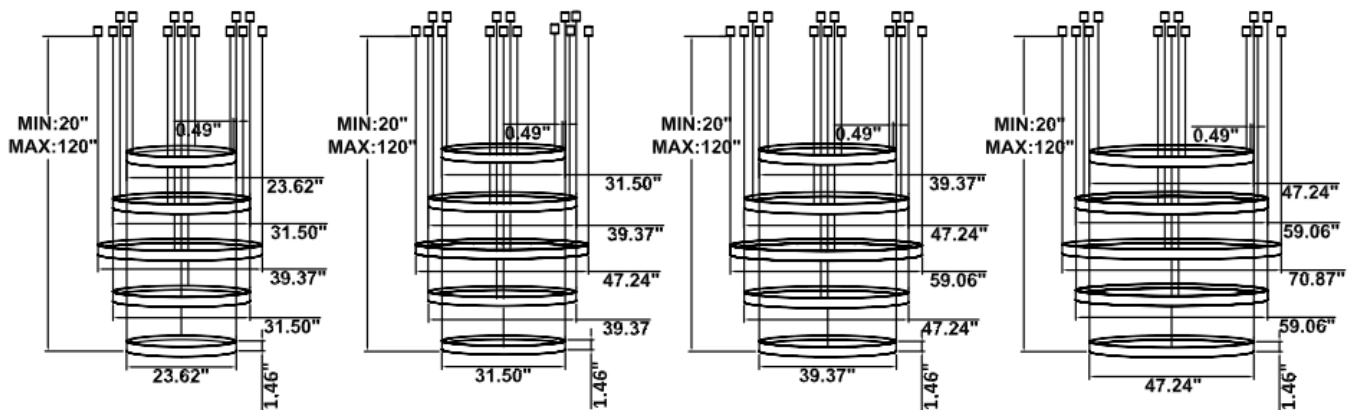


PHOTOMETRIC: Testing for single ring and direct only





15.75" 20W @ 4000K

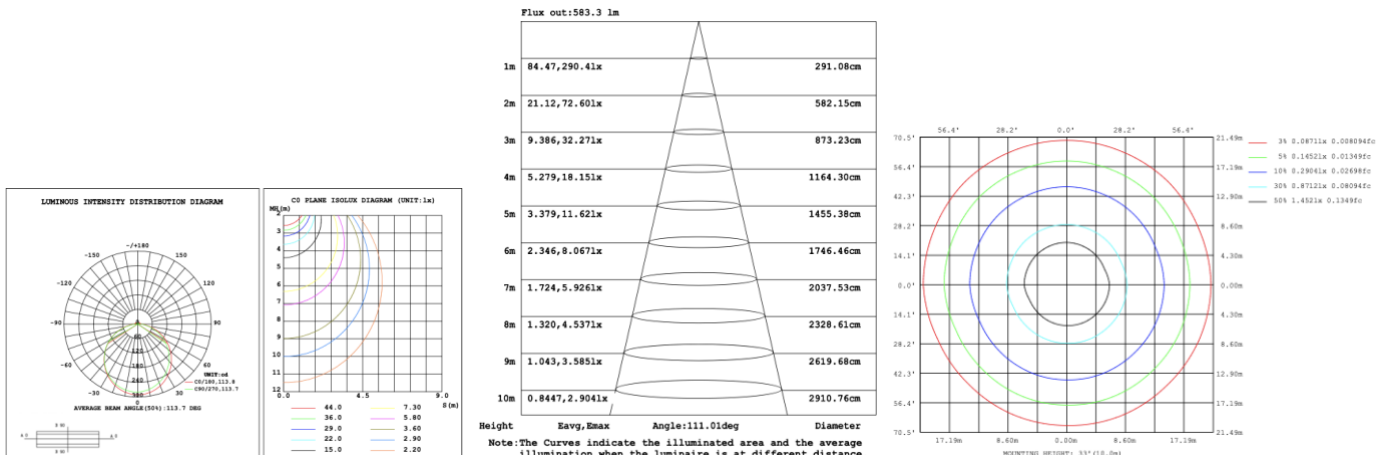





23.62" 30W @ 4000K

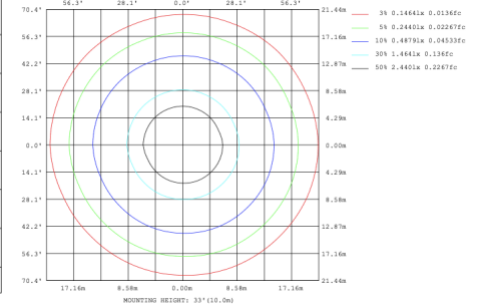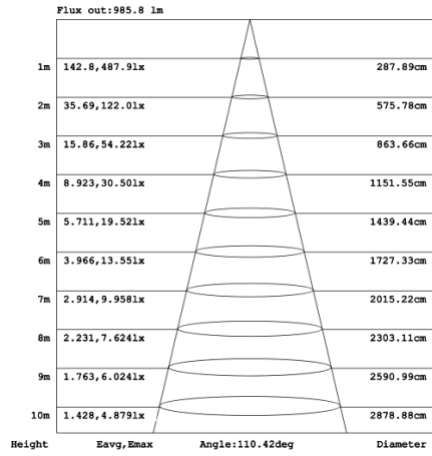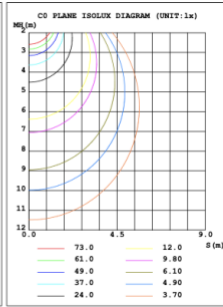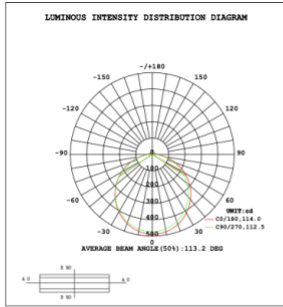




31.50" 40W @ 4000K

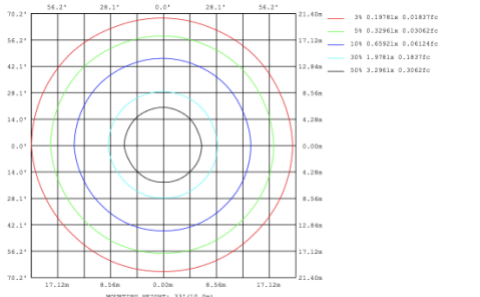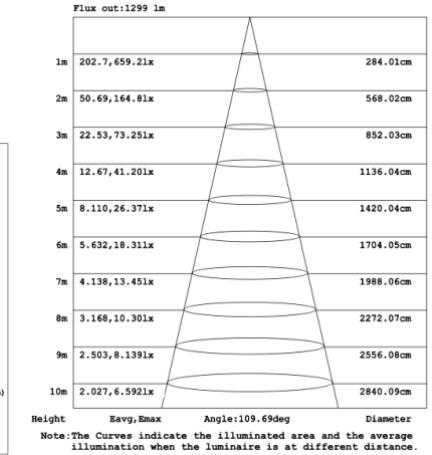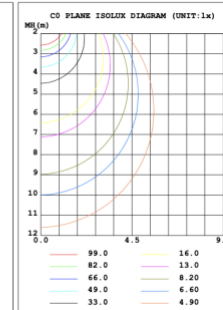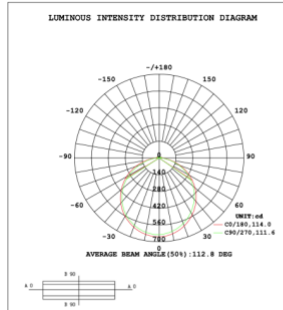




39.37" 50W @ 4000K

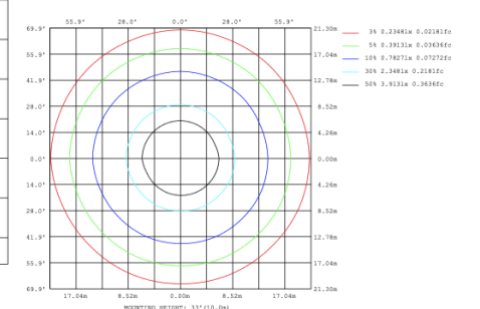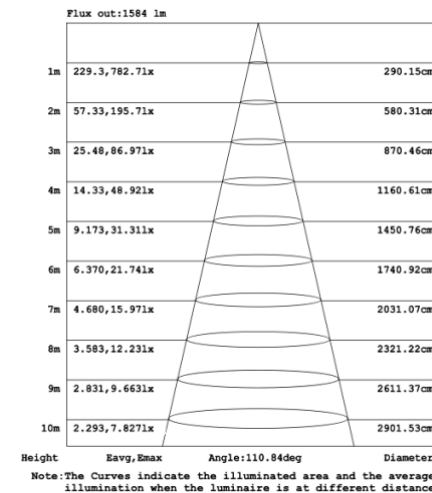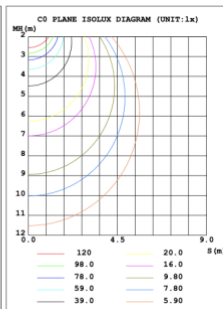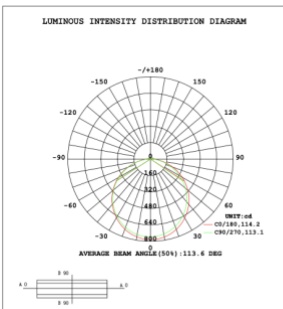

47.24" 60W @ 4000K

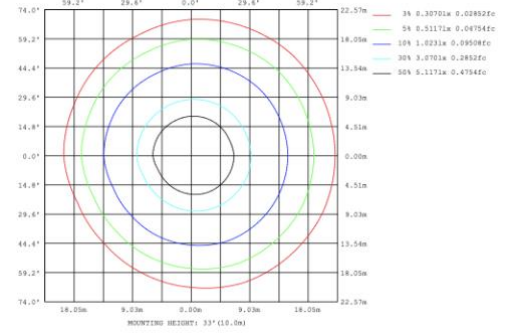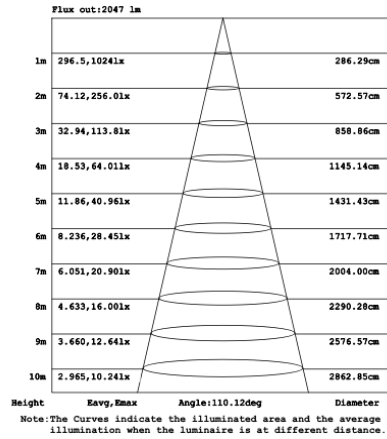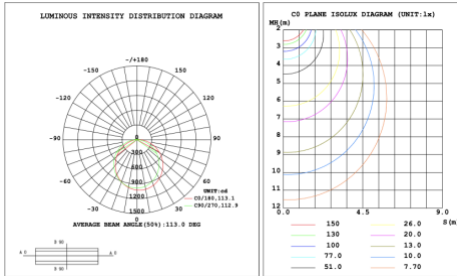

59.06" 70W @ 4000K

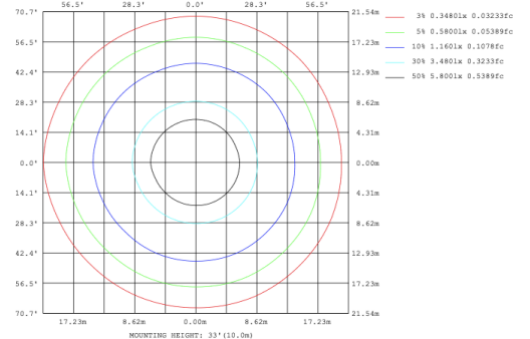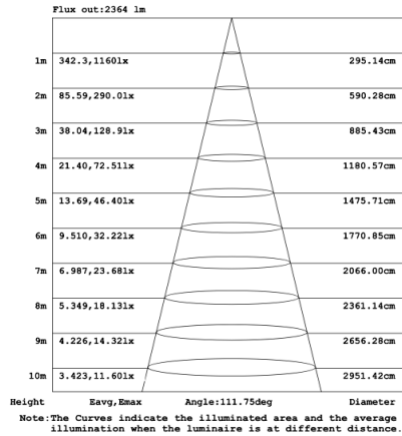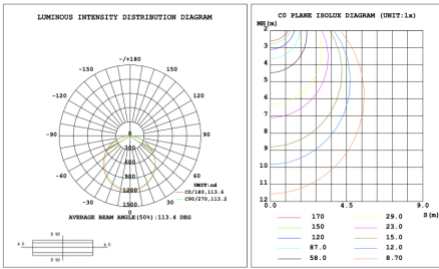

70.87" 80W @ 4000K

