



[View Bromont 6 tier on website](#)

[View Video](#)

[View application photos](#)

PRODUCT DESCRIPTION

The **Bromont** circular pendants are made of extruded aluminum with a direct/indirect component and a glare free flash lens. Sizes range from 15.57" to 70.87" and can be combined as desired to create multiple ring masterpieces. Tunable white and RGBW. Over 6500 powder coated colors, ships assembled.

FEATURES


- 5-year limited warranty.
- Ships assembled.
- Illumination direct/indirect.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- Lens: White frosted acrylic diffuser, Glare-free
- Fixture delivered lumens per watt ratio up to 82 LPW, 41 LPW direct, 41 LPW indirect, not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 2700K/3500K/4000K. Or 3000K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch



MODEL INFORMATION:

Example: SB-U106A270WSB

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-U106A	*270W=59.06"+47.24"+39.37"+31.50"+23.62"+15.57"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming	*B=Black Jack	*Blank=10' foot 120" (Standard)
	280W=70.87"+59.06"+47.24"+39.37"+31.50"+23.62"		L=ELV / Triac dimming	S=Platinum Silver	5'=5 foot 60"
SB-U106B SB-U106D	320W=39.37"+47.24"+59.06"+47.24"+39.37"+23.62"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	W=Gloss White	15'=15 foot 180"
	330W=39.37"+47.24"+59.06"+47.24"+39.37"+31.50"			O=Oil Rubbed Bronze	20'=20 foot 240"
	390W=47.24"+59.06"+70.87"+59.06"+47.24"+39.37"				25'=25 foot 300"
SB-U106C	180W=23.62"+31.5"+15.75"+31.5"+23.62"+15.75"	T=3K-4K Tunable White control by remote/wall control	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.		30'=30 foot 360"
	210W=31.50"+47.24"+15.75"+23.62"+15.75"+39.37"	R3= RGB+3000K			
	320W=47.24"+59.06"+39.37"+47.24"+39.37"+23.62"	R4=RGB+4000K	C=Dali		
	380W=59.06"+70.87"+47.24"+59.06"+47.24"+31.50"		. See control options	Find page 3 for color options or select from website Color Collections	
	390W=59.06"+70.87"+47.24"+59.06"+47.24"+39.37"				

STANDARD COLOR FINISHES




In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample, NFL football teams color or any RAL finish. Add Metallic, Sparkle, Transparent texture and originality to create a perfect custom products. Contact factory for quote.


SOLID TONE FINISH



SHIMMER / GLITTER FINISH



PALLEON METALLIC TEXTURE FINISH

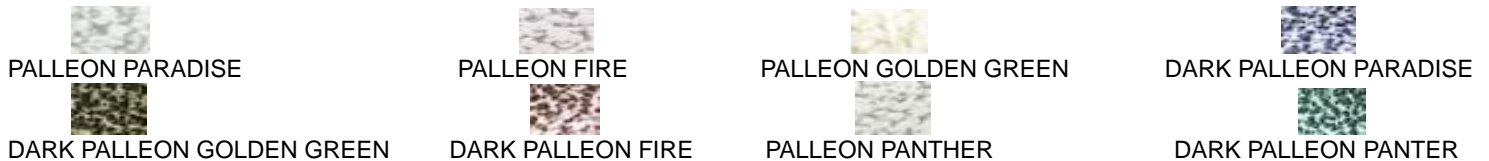

CHROME / SPECIALTY FINISH



SPARKLE FINISH



WETSTON WRINKLED TEXTURE FINISH




LUMEN OUTPUT (for color selectable not RGBW)

Model Number	Size	Wattage	Kelvin Temp field Selectable \pm 500K	Delivered Lumen \pm 10%
SB-U106A	59.06"+47.24"+39.37"+31.50"+23.62"+15.57"	270W	2700K/3500K/4000K or 3000K/3500K/4000K	22140 lm
	70.87"+59.06"+47.24"+39.37"+31.50"+23.62"	280W	2700K/3500K/4000K or 3000K/3500K/4000K	22960 lm
SB-U106B/D	39.37"+47.24"+59.06"+47.24"+39.37"+23.62"	320W	2700K/3500K/4000K or 3000K/3500K/4000K	26240 lm
	39.37"+47.24"+59.06"+47.24"+39.37"+31.50"	330W	2700K/3500K/4000K or 3000K/3500K/4000K	27060 lm
	47.24"+59.06"+70.87"+59.06"+47.24"+39.37"	390W	2700K/3500K/4000K or 3000K/3500K/4000K	31980 lm
SB-U106C	23.62"+31.5"+15.75"+ 31.5"+23.62"+15.75"	180W	2700K/3500K/4000K or 3000K/3500K/4000K	14760 lm
	31.50"+47.24"+15.75"+23.62"+15.75"+39.37"	210W	2700K/3500K/4000K or 3000K/3500K/4000K	17220 lm
	47.24"+59.06"+39.37"+ 47.24"+39.37"+23.62"	320W	2700K/3500K/4000K or 3000K/3500K/4000K	26240 lm
	59.06"+70.87"+47.24"+59.06"+47.24"+31.50"	380W	2700K/3500K/4000K or 3000K/3500K/4000K	31160 lm
	59.06"+70.87"+47.24"+59.06"+47.24"+39.37"	390W	2700K/3500K/4000K or 3000K/3500K/4000K	31980 lm

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

Get Smart


Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"


SB-U106A Canopy mount

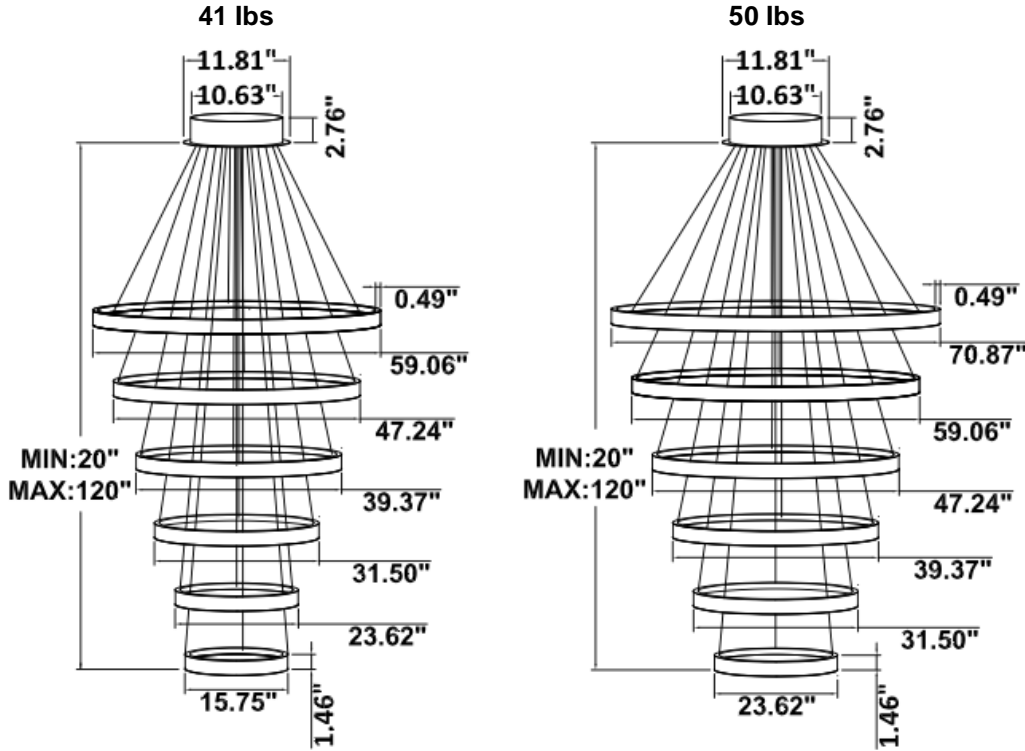


SB-U106B Canopy mount

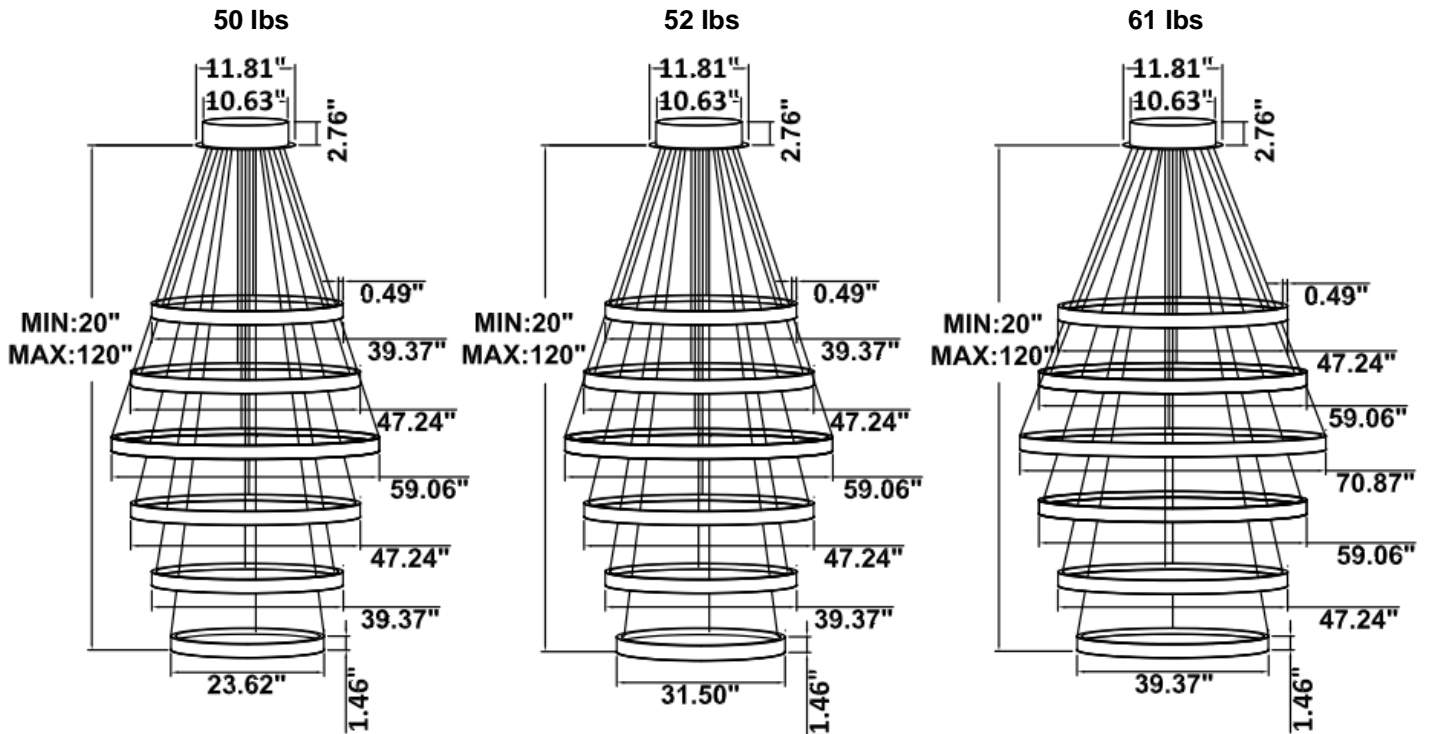


SB-U106C Canopy mount

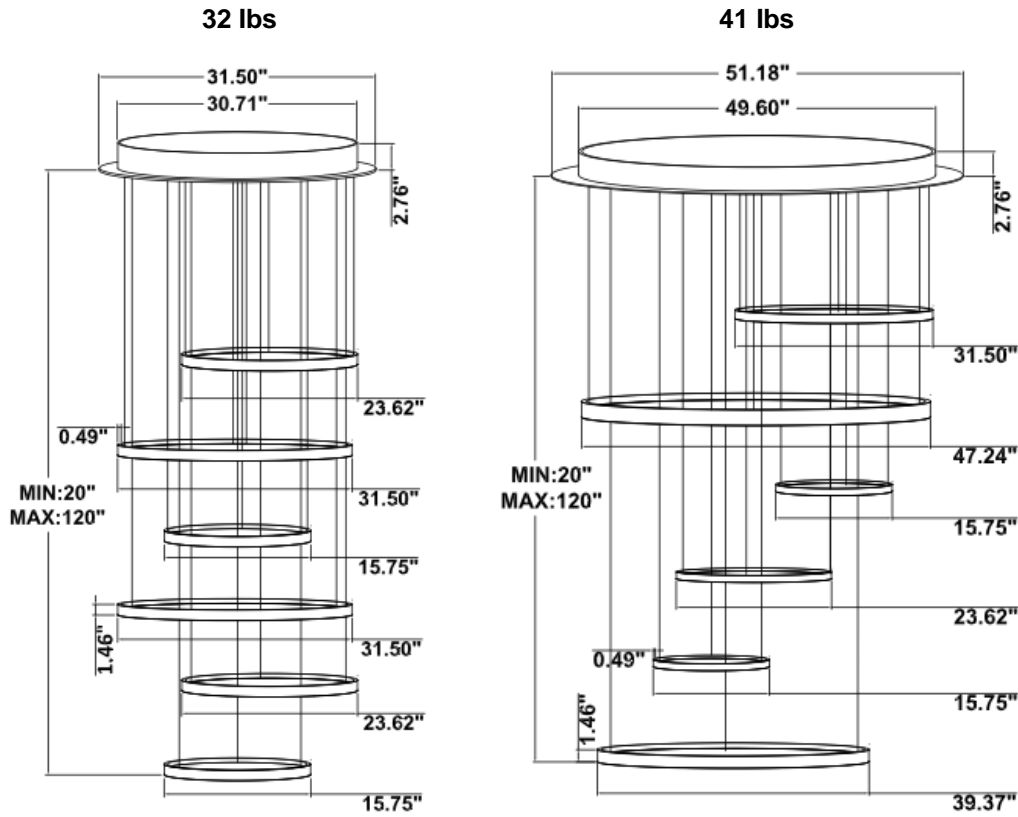

Canopy mount and cables fixed directly in the ceiling

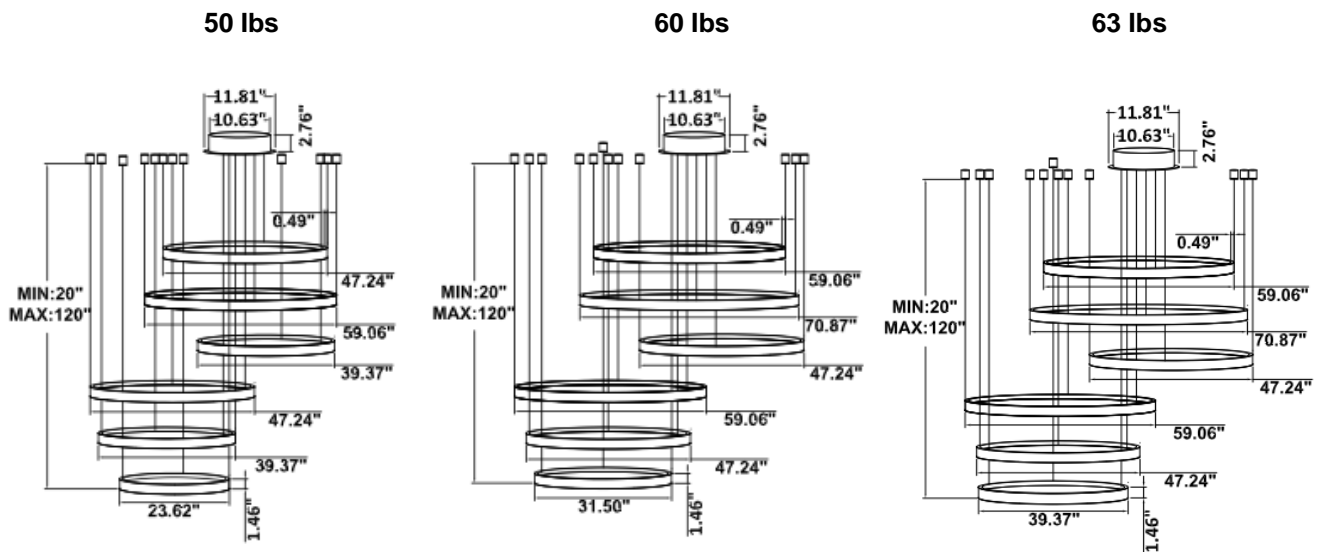


SB-U106D Remote mount and cables fixed directly in the ceiling



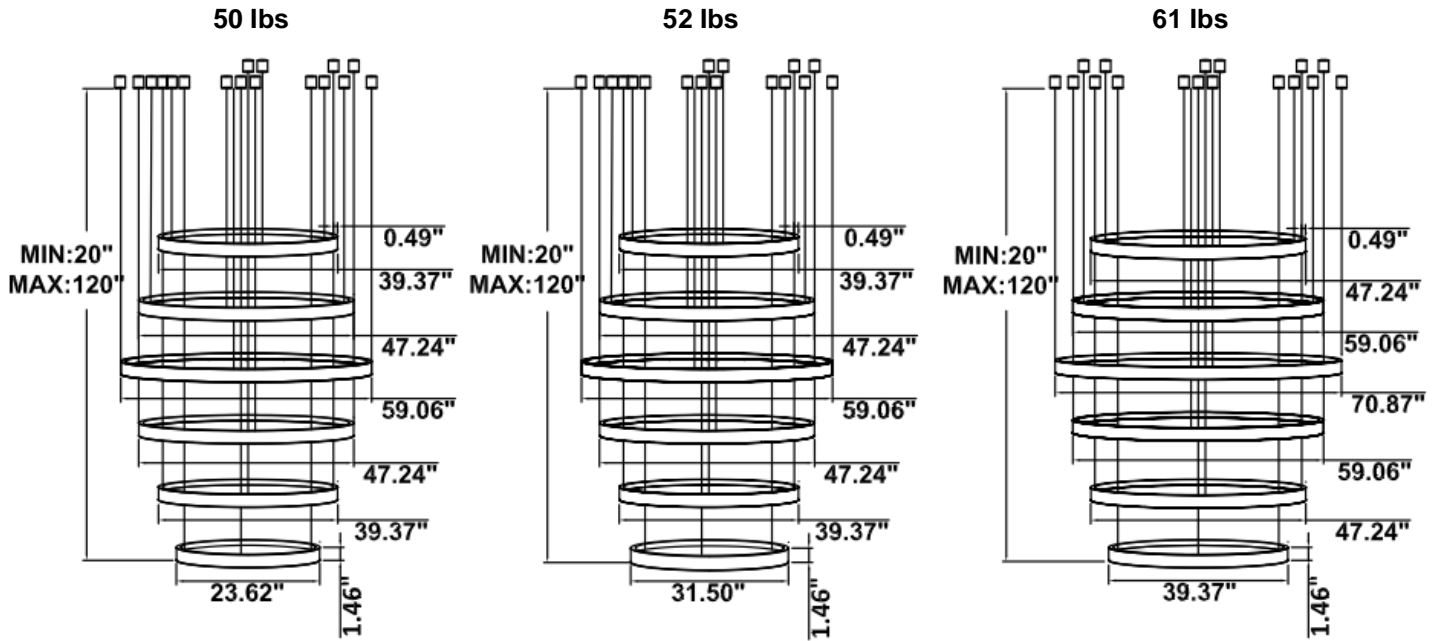


PHOTOMETRIC: Testing for single ring and direct only




15.75" 20W @ 4000K

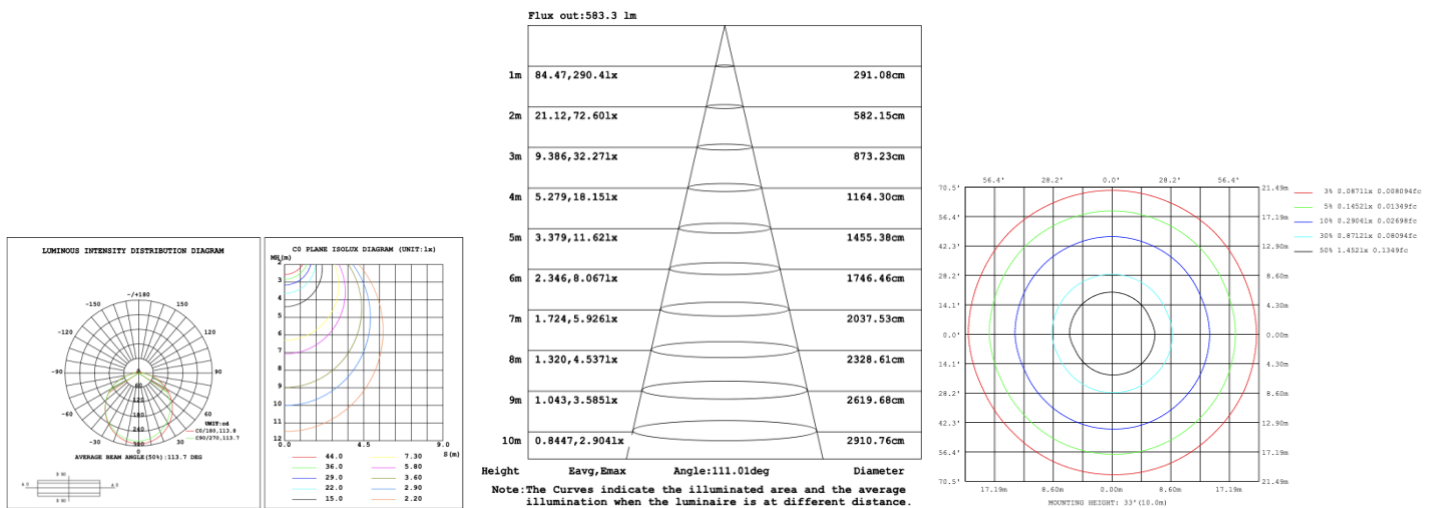




23.62" 30W @ 4000K

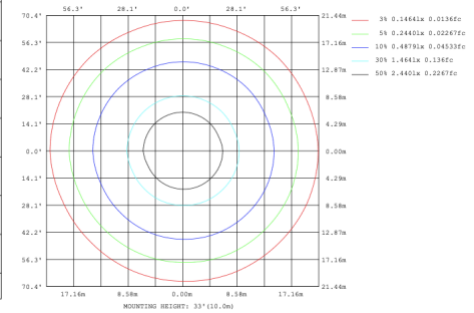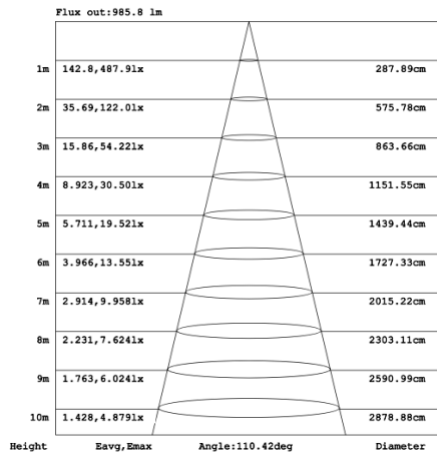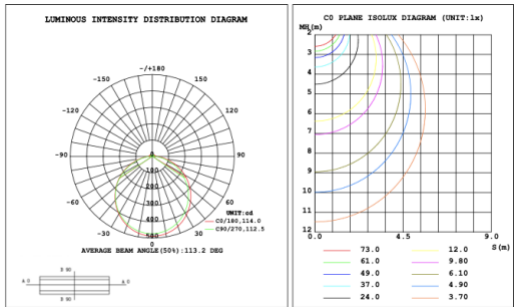




31.50" 40W @ 4000K

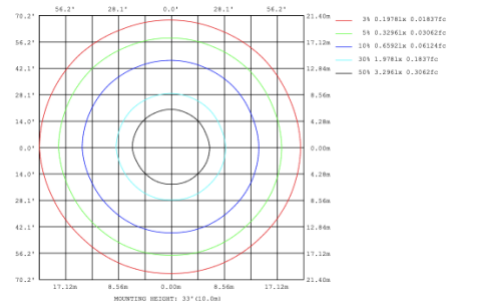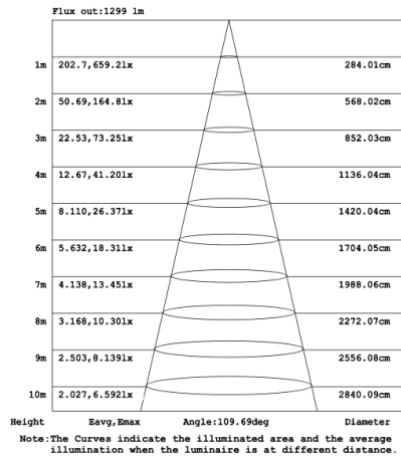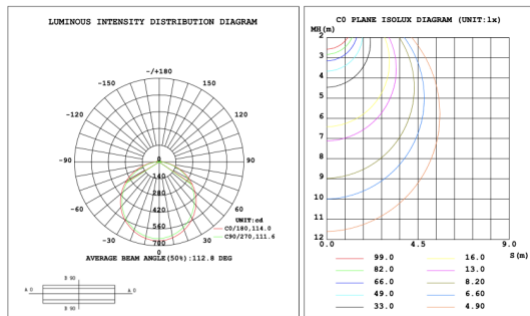




39.37" 50W @ 4000K

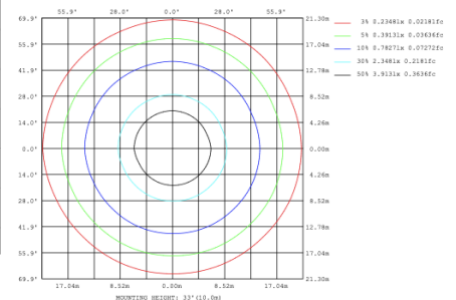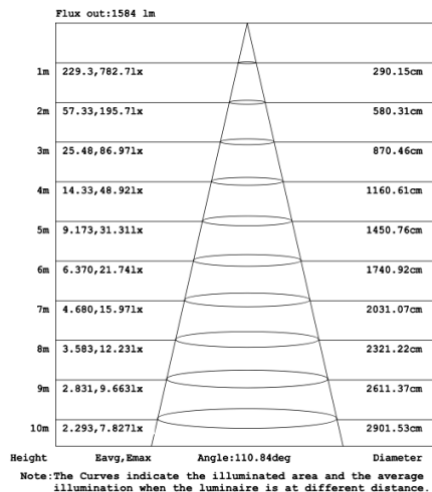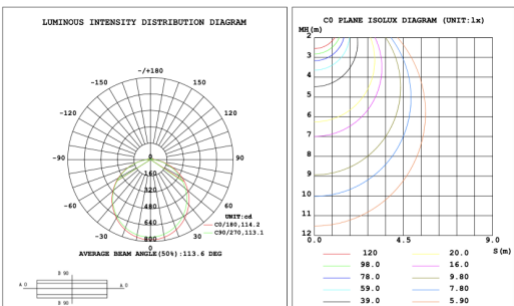

47.24" 60W @ 4000K

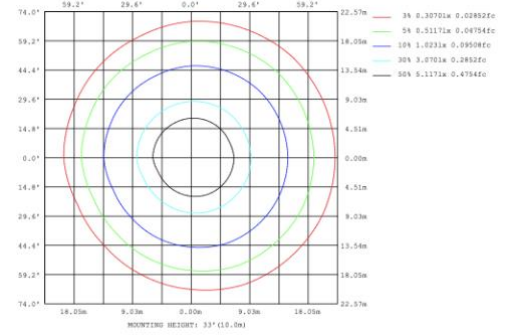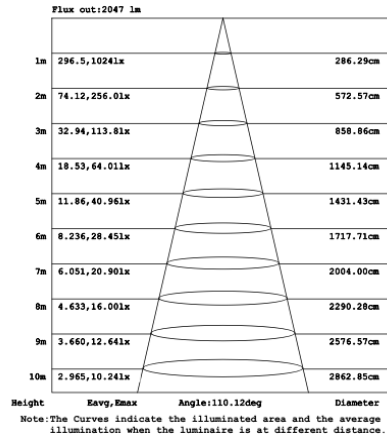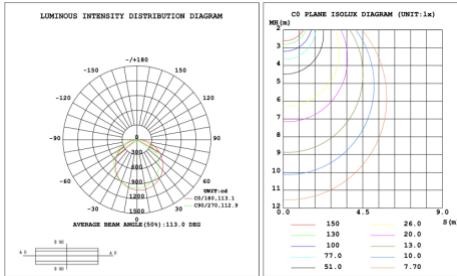

59.06" 70W @ 4000K

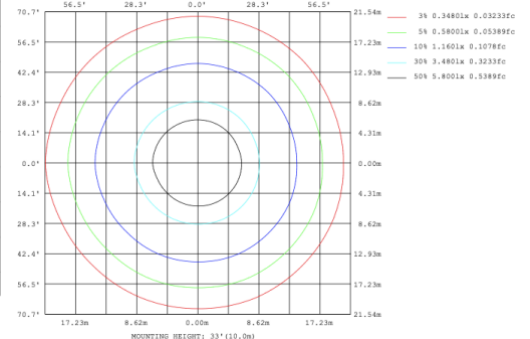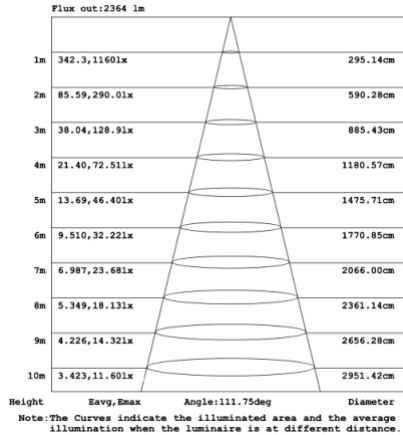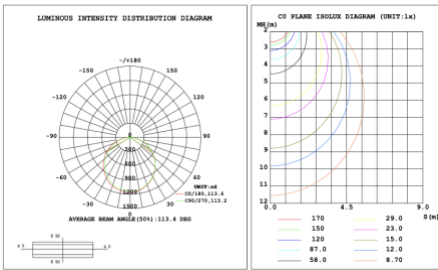

70.87" 80W @ 4000K

