


Light inside



Light outside

[View Davos 3 tier on website](#)
[View Video](#)
[View application photos](#)

Davos 3 Tier

PRODUCT DESCRIPTION

The **Davos** circular design is made of extruded aluminum with either inside or outside lighting and lenses that beautifully blend the LEDs. Sizes ranging from 31.50" to 70.87". Suspension height adjustable, offering over 6,500 custom powder coated colors, ships assembled.

FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination inside or outside the profile.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints. Custom Configuration available.
- Fixture lumens per watt ratio up to 82 LPW for illumination outside, up to 72 LPW for illumination inside, not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location.(BAA) Buy American Compliant.
- Built in color temperature selectable. Choose from 2700K/3500K/4000K Or 3000K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch




MODEL INFORMATION:

Example: SB-H03A90WSB

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
SB-H03A SB-H03D SB-H03H SB-H03J SB-H03M SB-H03N SB-H03K SB-H03R	150W= 47.24"+39.37"+31.50" 180W=59.06"+47.24"+39.37" 200W=70.87"+59.06"+47.24"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	*B=Black Jack S=Platinum Silver	*Blank=10' foot 120" (Standard) 5'=5 foot 60"
SB-H03B SB-H03C SB-H03G	150W=31.50"+39.37"+47.24" 180W=39.37"+47.24"+59.06" 200W=47.24"+59.06"+70.87"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	L=ELV / Triac dimming	W=Gloss White O=Oil Rubbed Bronze	15'=15 foot 180" 20'=20 foot 240" 25'=25 foot 300"
SB-H03E SB-H03F SB-H03I	150W= 39.37"+31.50"+39.37" 160W=47.24"+39.37"+47.24" 200W=59.06"+47.24"+59.06" 240W=70.87"+59.06"+70.87"	T=3K-4K Tunable White control by remote/wall control R3= RGB+3000K	C=Dali Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.		30'=30 feet 360"
SB-H03H	130W=31.50"+39.37"+31.50" 200W=47.24"+59.06"+47.24" 220W=59.06"+70.87"+59.06"	R4=RGB+4000K		Find page 3 for color options or select from website Color Collections	
Request price for other Kelvin temp and configurations			See control options		

STANDARD COLOR FINISHES



GLOSS WHITE



PLATINUM SILVER



BLACK JACK




OIL RUBBED BRONZE

In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample, NFL football teams color or any RAL finish. Add Metallic, Sparkle, Transparent texture and originality to create a perfect custom products.


SOLID TONE FINISH



SHIMMER / GLITTER FINISH



PALLEON METALLIC TEXTURE FINISH

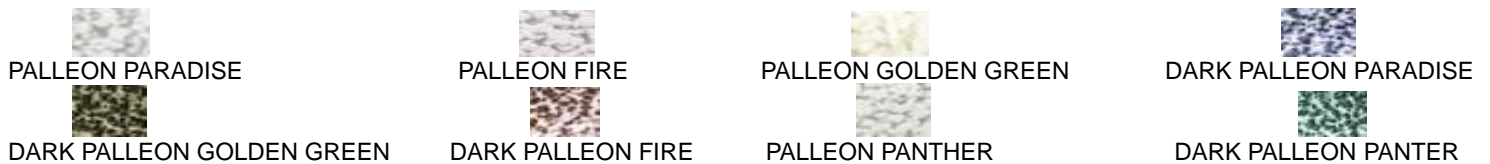

CHROME / SPECIALTY FINISH



SPARKLE FINISH



WETSTON WRINKLED TEXTURE FINISH




LUMEN OUTPUT

Model Number	Size	Wattage	Kelvin Temp field Selectable \pm 500K	Delivered Lumen \pm 10%
SB-H03A/D/K/M/G/R	47.24"+39.37"+31.50"	150W	2700K/3500K/4000K or 3000K/3500K/4000K	10800
	59.06"+47.24"+39.37"	180W	2700K/3500K/4000K or 3000K/3500K/4000K	12960
	70.87"+59.06"+47.24"	200W	2700K/3500K/4000K or 3000K/3500K/4000K	14400
SB-H03B/L/N	31.50"+39.37"+47.24"	150W	2700K/3500K/4000K or 3000K/3500K/4000K	12300
	39.37"+47.24"+59.06"	180W	2700K/3500K/4000K or 3000K/3500K/4000K	14760
	47.24"+59.06"+70.87"	200W	2700K/3500K/4000K or 3000K/3500K/4000K	16400
SB-H03C	31.50"+39.37"+47.24"	150W	2700K/3500K/4000K or 3000K/3500K/4000K	11300
	39.37"+47.24"+59.06"	180W	2700K/3500K/4000K or 3000K/3500K/4000K	13560
	47.24"+59.06"+70.87"	200W	2700K/3500K/4000K or 3000K/3500K/4000K	15920
SB-H03E	39.37"+31.50"+39.37"	150W	2700K/3500K/4000K or 3000K/3500K/4000K	10800
	47.24"+39.37"+47.24"	160W	2700K/3500K/4000K or 3000K/3500K/4000K	11520
	59.06"+47.24"+59.06"	200W	2700K/3500K/4000K or 3000K/3500K/4000K	14400
	70.87"+59.06"+70.87"	240W	2700K/3500K/4000K or 3000K/3500K/4000K	17280
SB-H03F/I	39.37"+31.50"+39.37"	150W	2700K/3500K/4000K or 3000K/3500K/4000K	10480
	47.24"+39.37"+47.24"	160W	2700K/3500K/4000K or 3000K/3500K/4000K	12740
	59.06"+47.24"+59.06"	200W	2700K/3500K/4000K or 3000K/3500K/4000K	15000
	70.87"+59.06"+70.87"	240W	2700K/3500K/4000K or 3000K/3500K/4000K	17260
SB-H03H	31.50"+39.37"+31.50"	130W	2700K/3500K/4000K or 3000K/3500K/4000K	10160
	47.24"+59.06"+47.24"	200W	2700K/3500K/4000K or 3000K/3500K/4000K	14880
	59.06"+70.87"+59.06"	220W	2700K/3500K/4000K or 3000K/3500K/4000K	17240
SB-H03J	47.24"+39.37"+31.50"	150W	2700K/3500K/4000K or 3000K/3500K/4000K	11300
	59.06"+47.24"+39.37"	180W	2700K/3500K/4000K or 3000K/3500K/4000K	13560
	70.87"+59.06"+47.24"	200W	2700K/3500K/4000K or 3000K/3500K/4000K	15820

EMERGENCY BATTERY OPTIONS


[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes


RGBW/TUNABLE WHITE SMART CONTROL: [SEE SPEC AND VIDEO](#)

DIMENSIONS & WEIGHTS: Driver Canopy Size for ZigBee & DMX : 15.75" x 2.76"


SB-H03A Canopy mount with swiveled rings, light inside

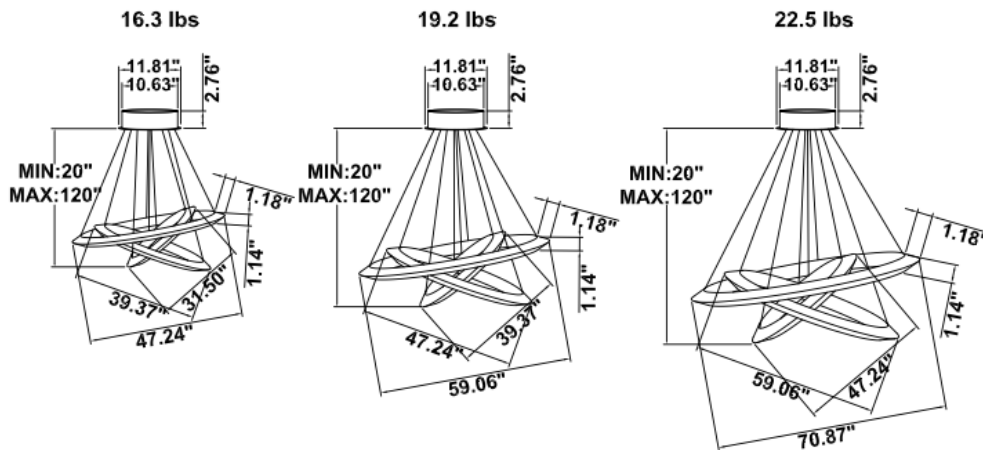


SB-H03B Canopy mount and cables fixed directly in the ceiling, light outside

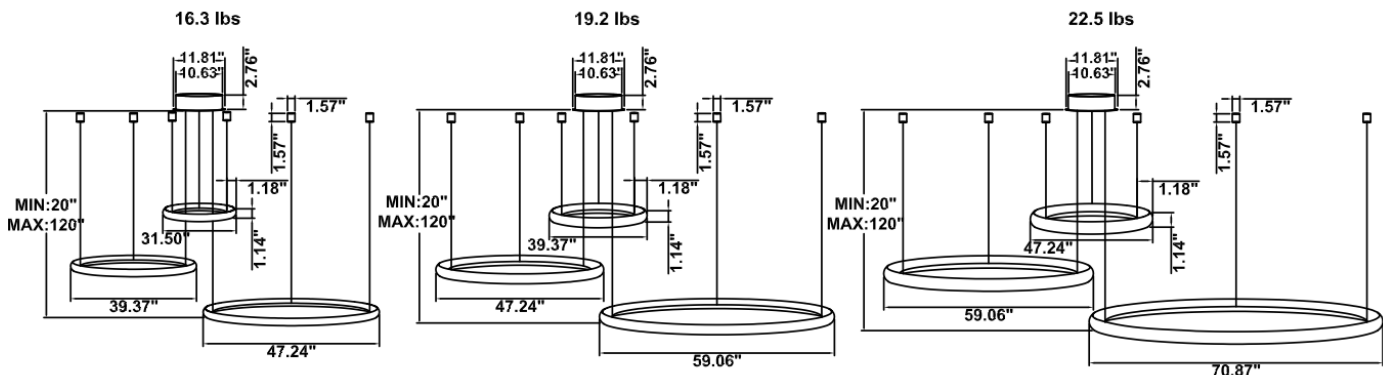


SB-H03C Canopy mount, 1st & 3rd ring light inside, 2nd ring light outside

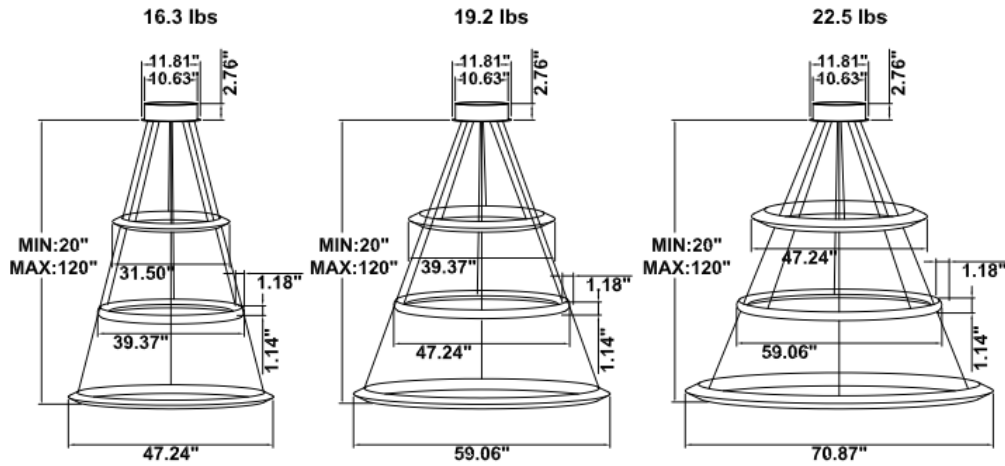


SB-H03D Canopy mount, cables fixed directly in the ceiling, light inside

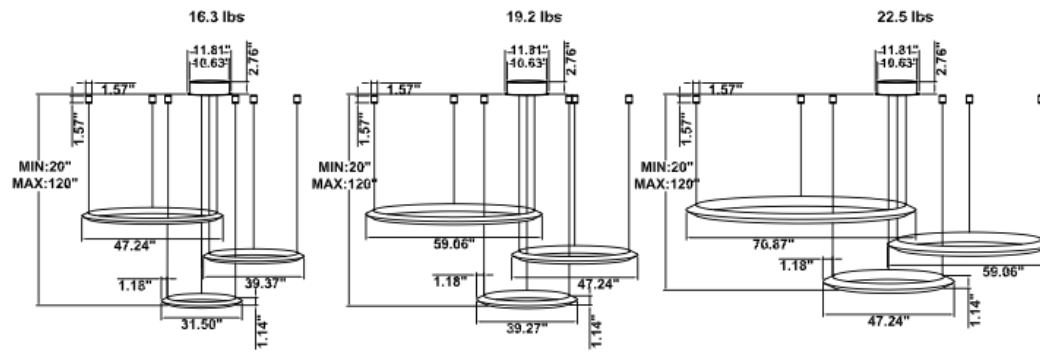


SB-H03E Canopy mount, light inside

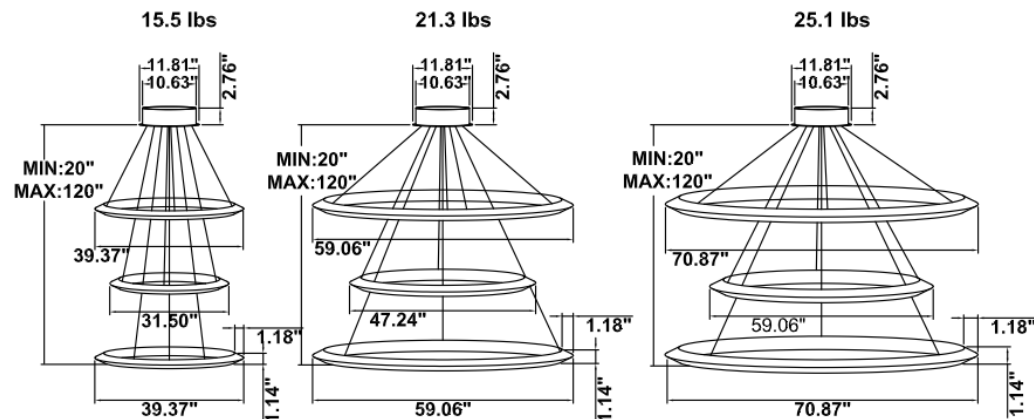


SB-H03F Canopy mount, 1st & 3rd ring light inside, 2nd ring light outside

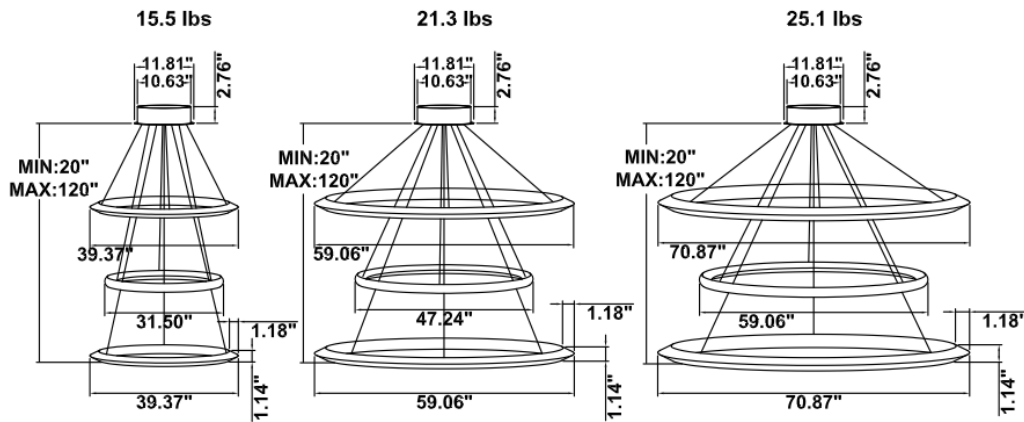


SB-H03G Canopy mount, light inside

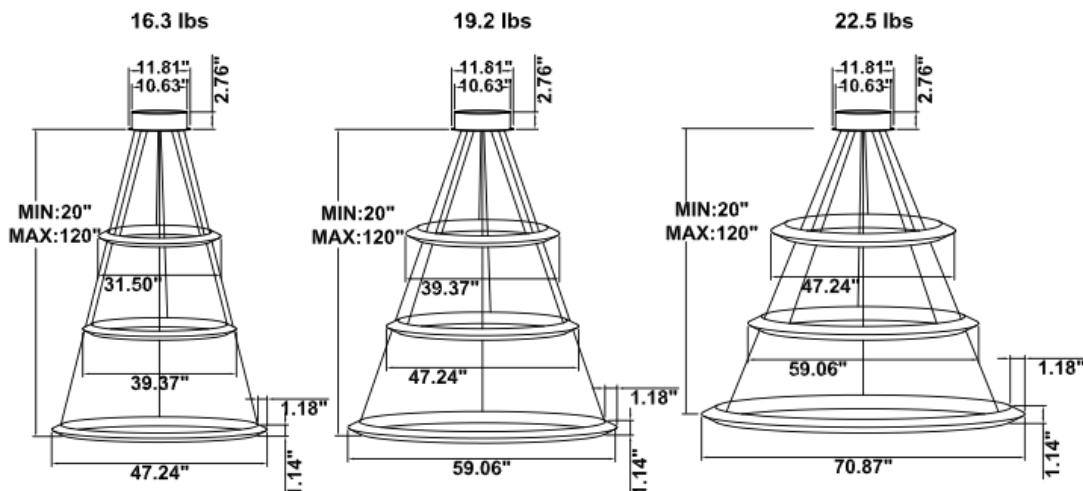


SB-H03H Canopy mount, 1st & 3rd ring light outside, 2nd ring light inside

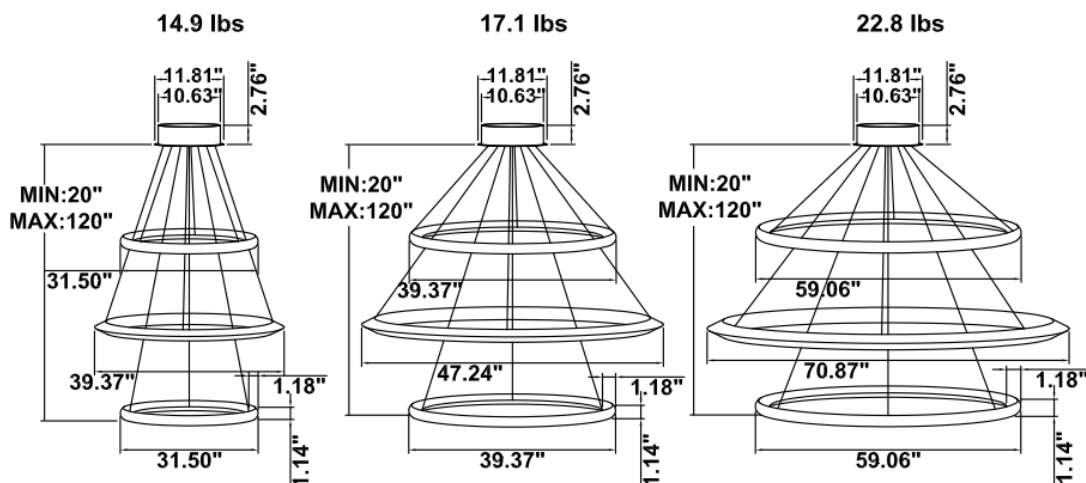


SB-H03I Canopy mount with accent ring ,1st & 3rd ring light inside, 2nd ring light outside

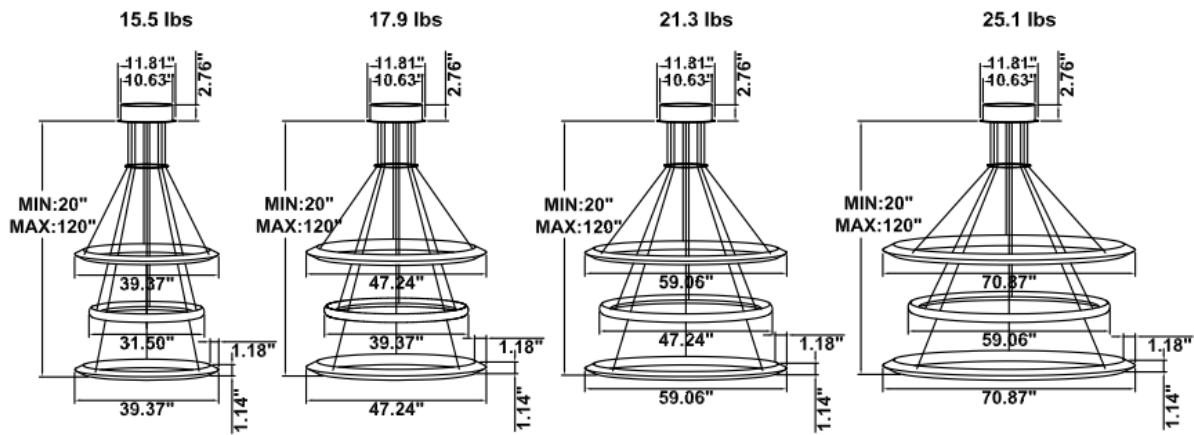


SB-H03J Canopy mount cables fixed directly in the ceiling, 1st & 3rd ring light inside, 2nd ring light outside

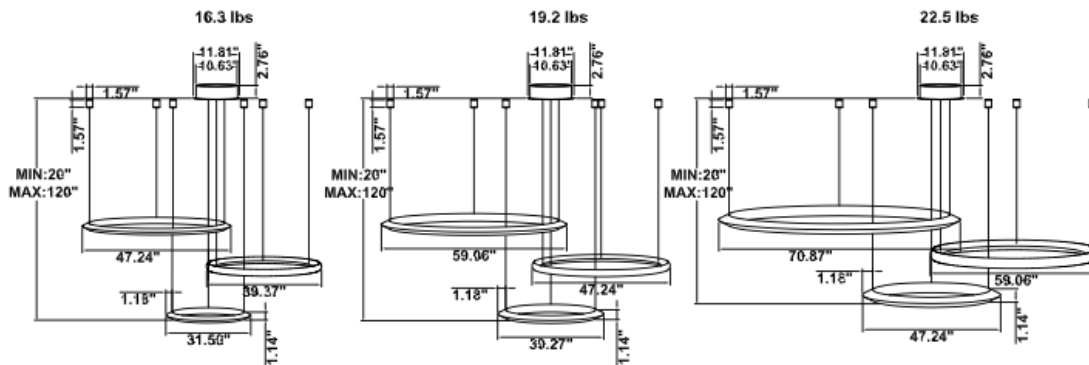


SB-H03K Canopy mount with accent ring, light inside

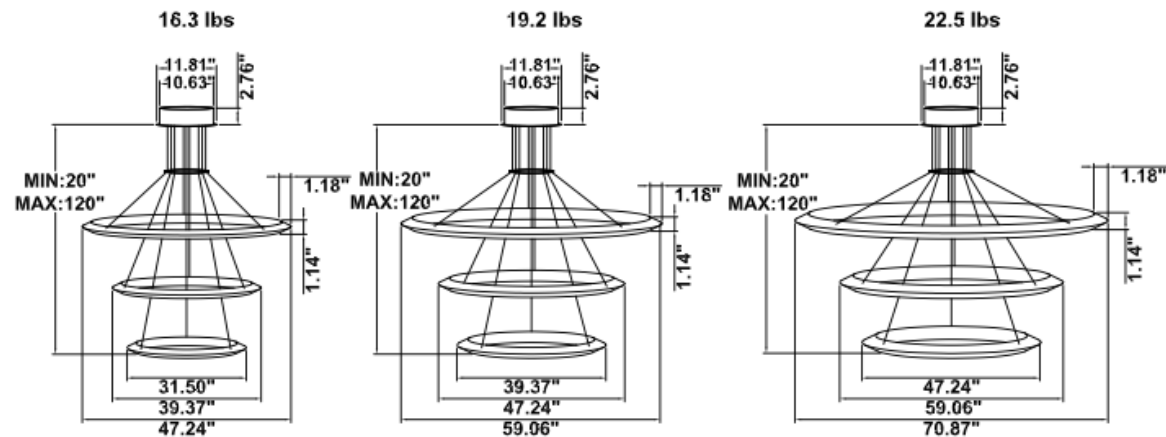


SB-H03L Canopy mount with accent ring light outside

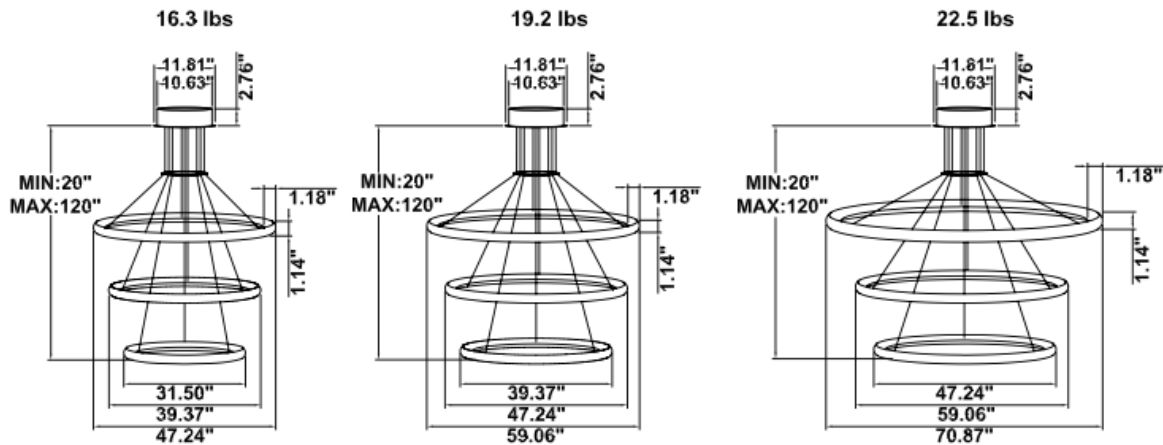


SB-H03M Canopy mount light inside

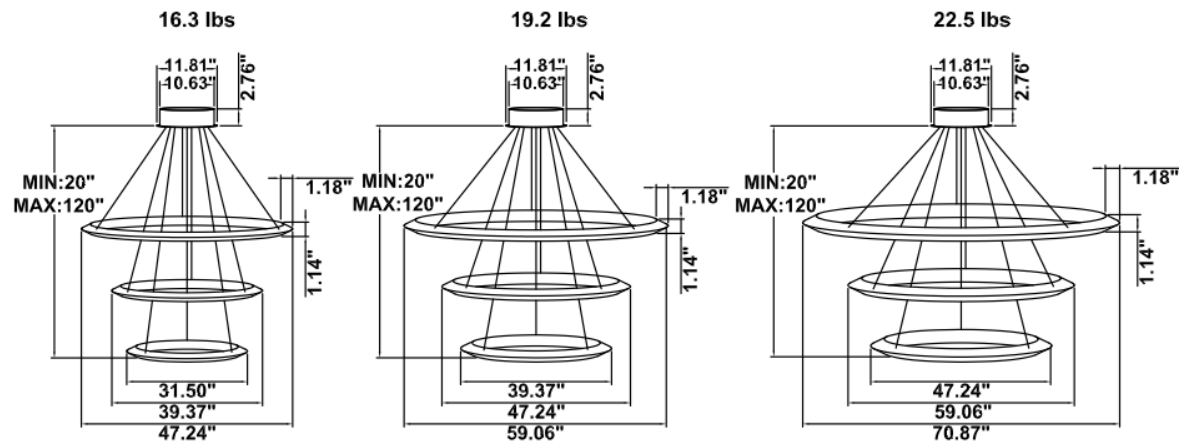

SB-H03N Canopy mount light outside

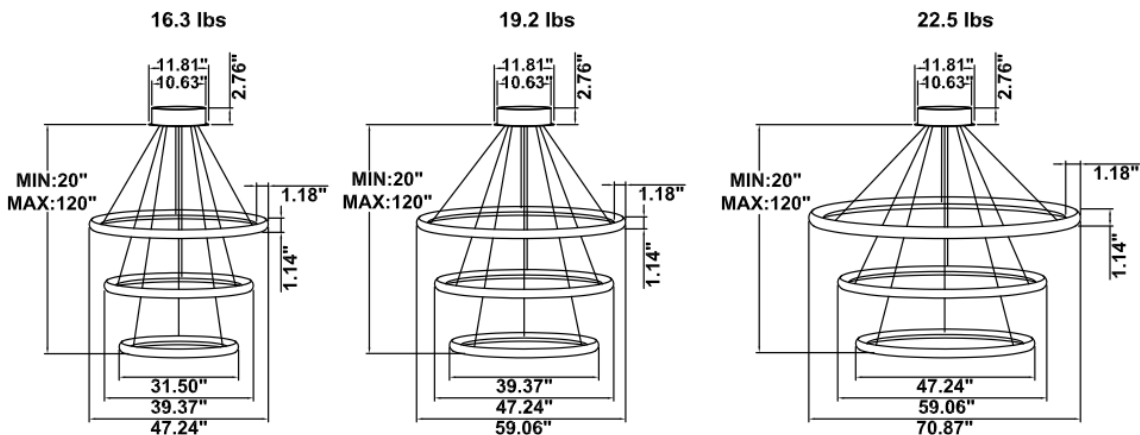


SB-H03R Remote mount, cables fixed directly in the ceiling Light inside, (Driver box size: L10.83" X W3.78" X H1.81")

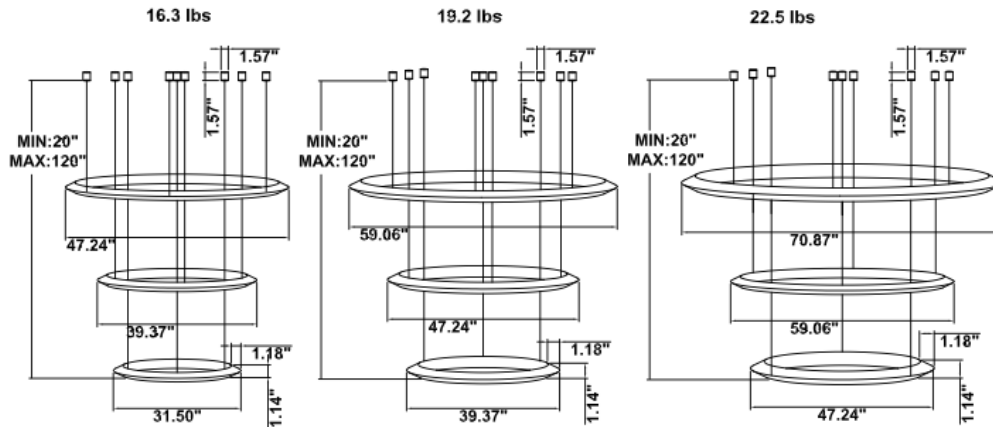


PHOTOMETRIC Test report for 1 Tier Ring only: Illumination Inside the profile




SB-H01A40W 31.50" 40W @ 4000K

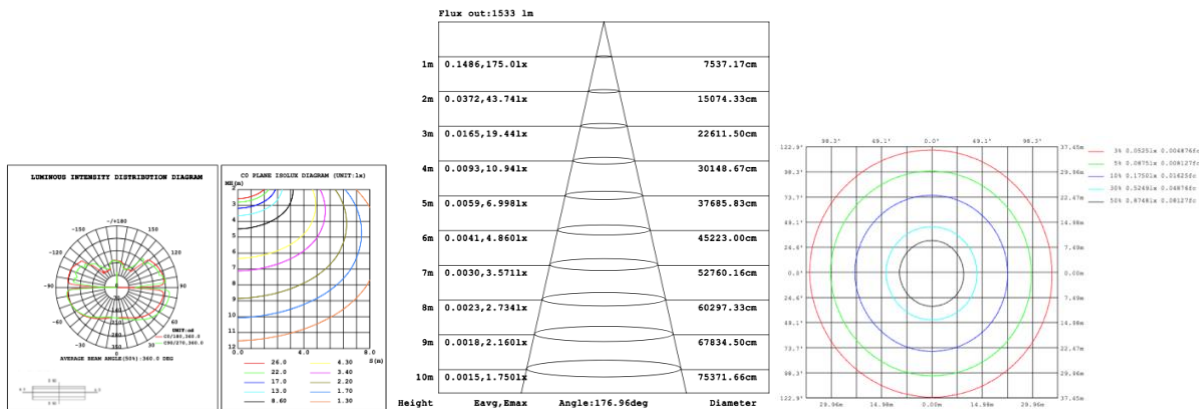




SB-H01A50W 39.37" 50W @ 4000K

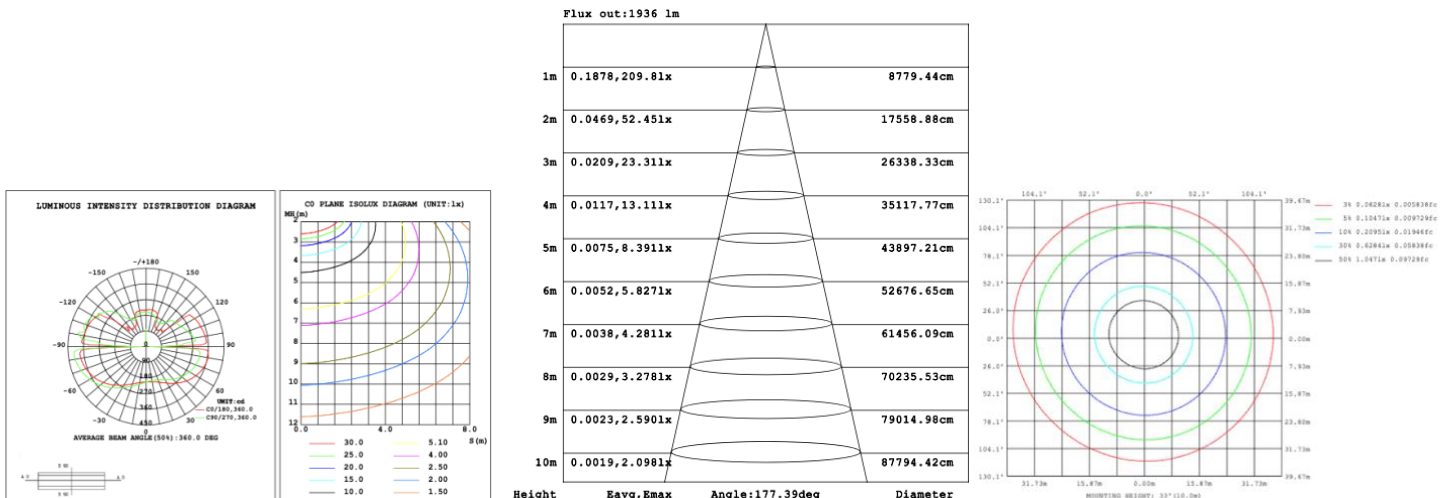




SB-H01A60W 47.24" 60W @ 4000K

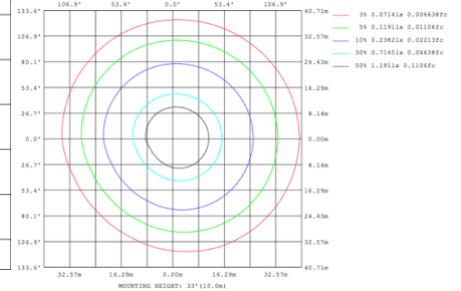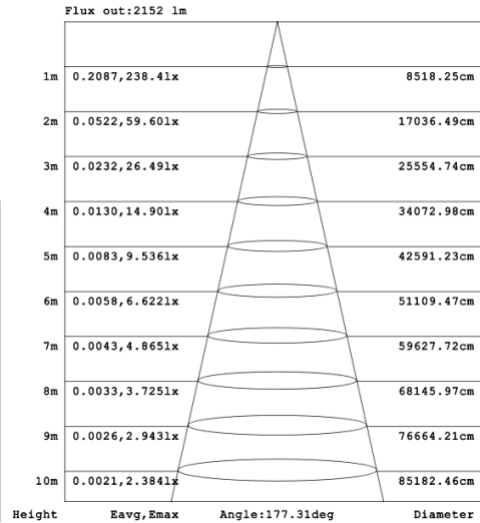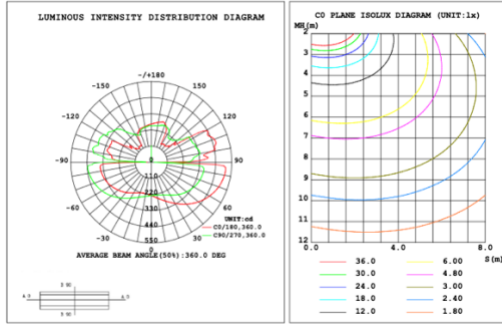

SB-H01A70W 59.06" 70W @ 4000K

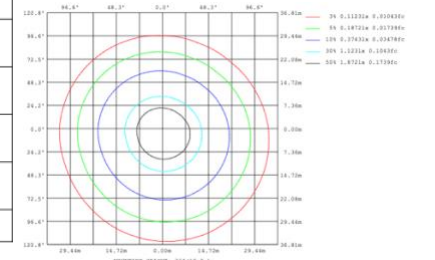
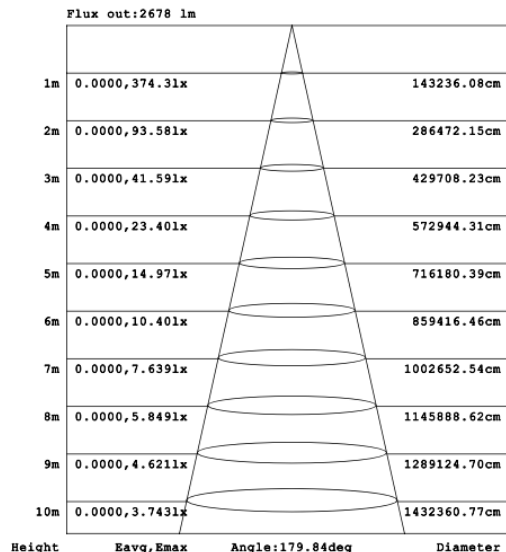
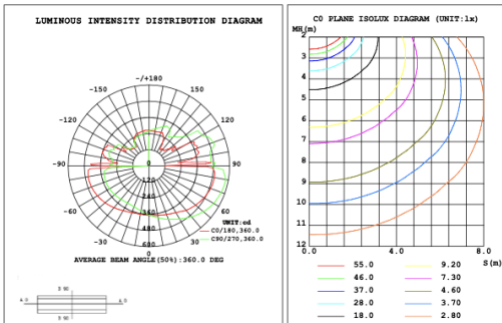


SB-H01A80W 70.87" 80W @ 4000K

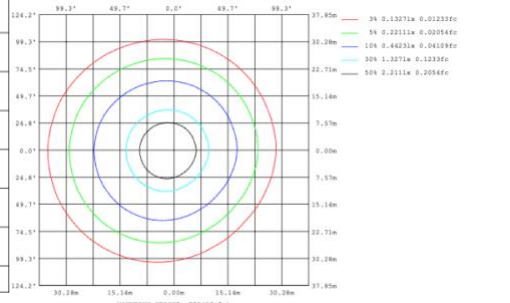
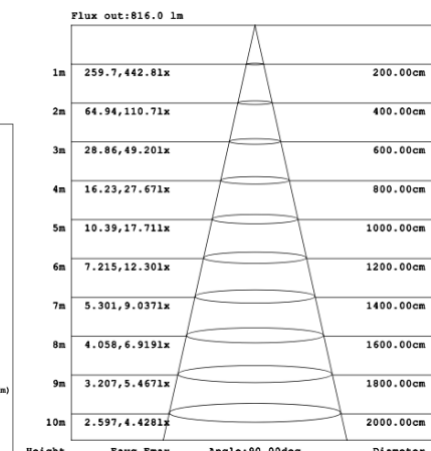
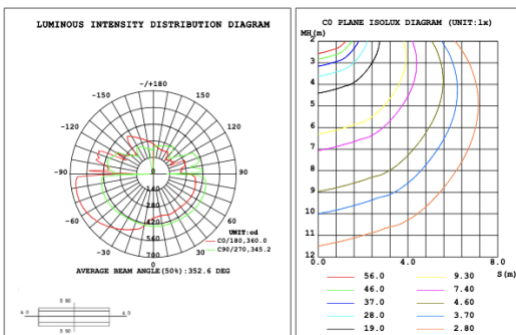


Illumination Outside the profile


SB-H01B40W 31.50" 40W @ 4000K

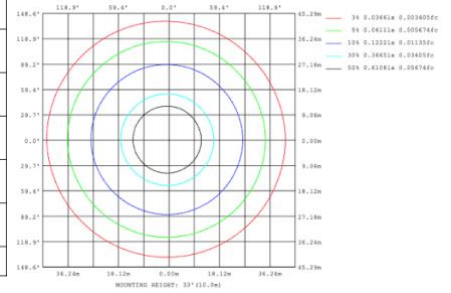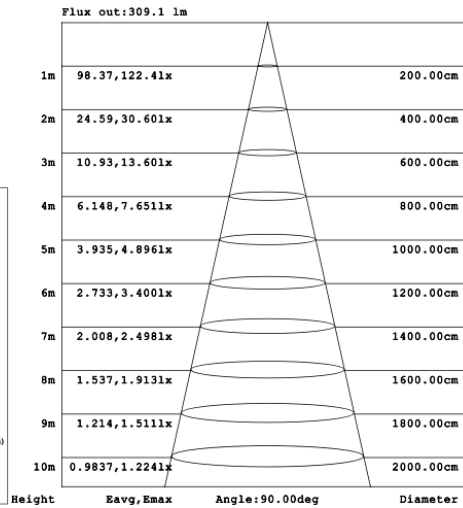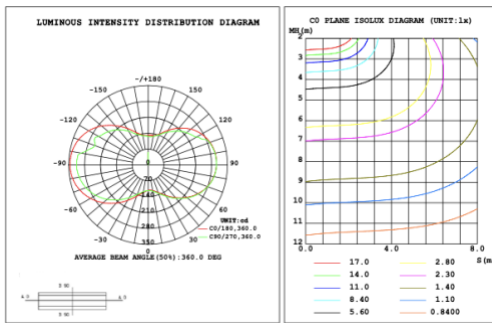


SB-H01B50W 39.37" 50W @ 4000K

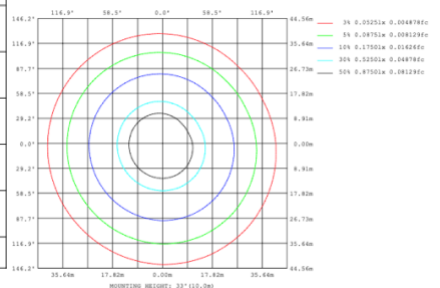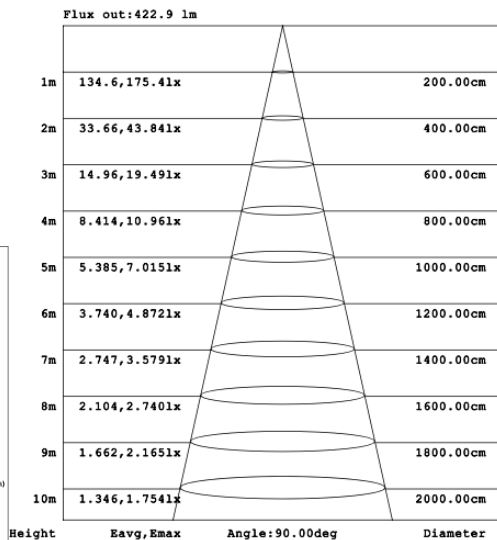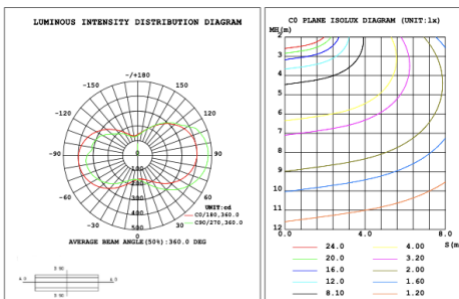

SB-H01B60W 47.24" 60W @ 4000K

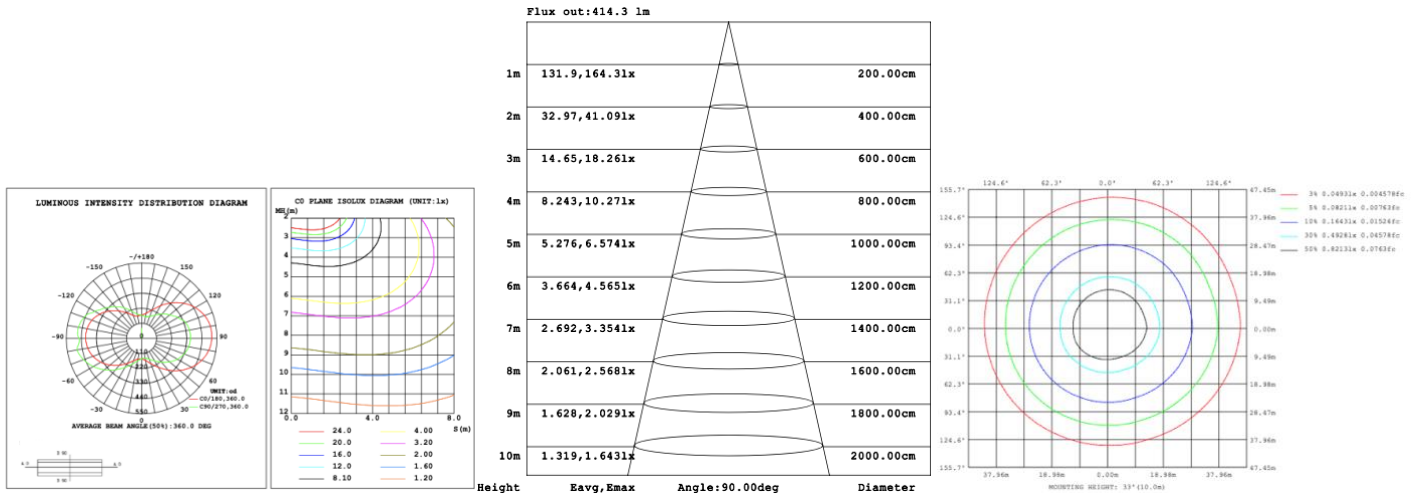

SB-H01B70W 59.06" 70W @ 4000K

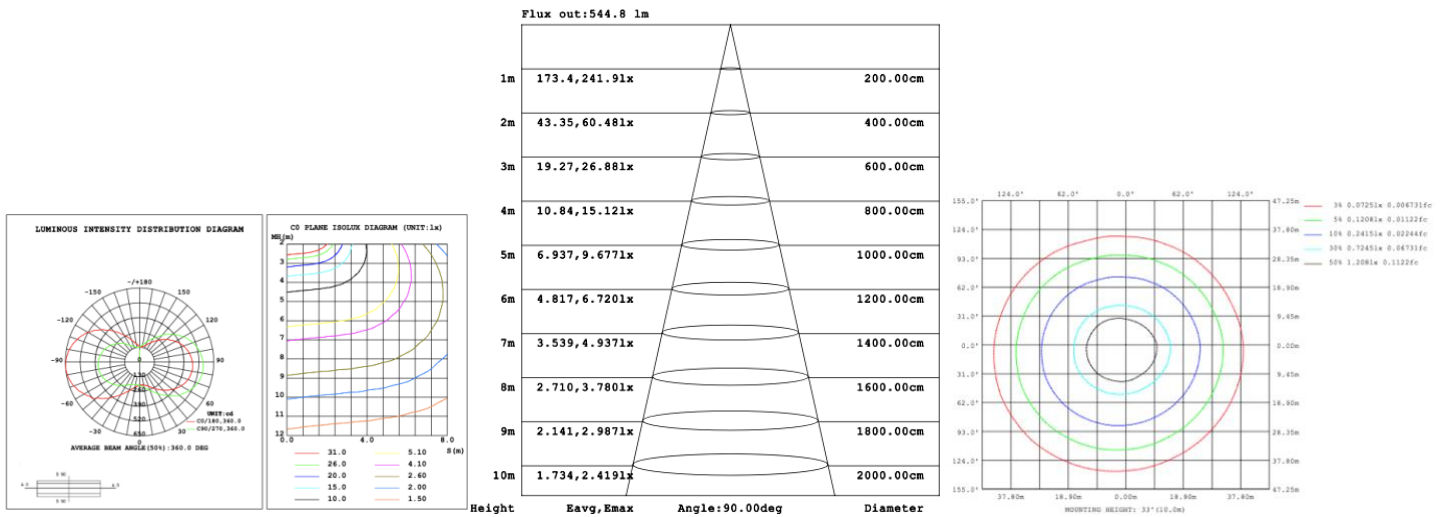

SB-H01B80W 70.87" 80W @ 4000K

