

[View keystone 2 tier on website](#)

[View Video](#)

[View application photos](#)

PRODUCT DESCRIPTION

The **Keystone** circular pendants are made of extruded aluminum with a direct only component and a glare free flash lens. Sizes range from 15.57" to 70.87" and can be combined as desired to create multiple ring masterpieces. Tunable white and RGBW. Over 6500 powder coated colors, ships assembled.

FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination direct.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- Lens: White frosted acrylic diffuser, Glare-free
- Fixture delivered lumens per watt ratio up to 60 LPW not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K ; Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch



MODEL INFORMATION:

Example: SB-D102A90WSB

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-D102A SB-D102B SB-D102C SB-D102D SB-D102E SB-D102F	*90W=39.37"+31.50" 110W=47.24"+39.37" 130W=59.06"+47.24" 150W=70.87"+59.06"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming	*B=Black Jack S=Platinum Silver	*Blank=10' foot 120" (Standard) 5'=5 foot 60"
		A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	L=ELV / Triac dimming	W=Gloss White O=Oil Rubbed Bronze	15'=15 foot 180" 20'=20 foot 240"
		T=3K-4K Tunable White control by remote/wall control	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)		25'=25 foot 300"
		R3= RGB+3000K	C=Dali		30'=30 foot 360"
		Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	Find page 3 for color options or select from website Color Collections		
		Request price for other Kelvin temp	R4=RGB+4000K	See control options	

STANDARD COLOR FINISHES



In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample, NFL football teams color or any RAL finish. Add Metallic, Sparkle, Transparent texture and originality to create a perfect custom products. Contact factory for quote.


SOLID TONE FINISH



SHIMMER / GLITTER FINISH



PALLEON METALLIC TEXTURE FINISH

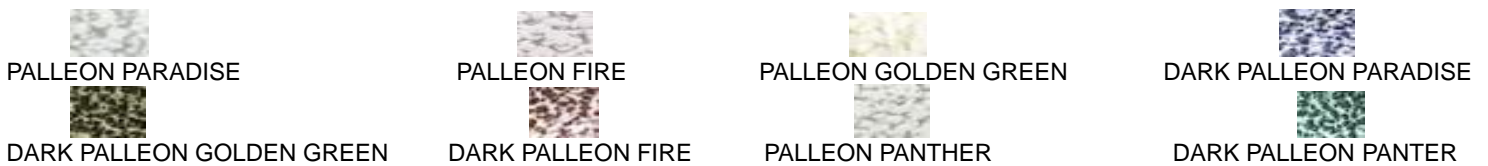

CHROME / SPECIALTY FINISH



SPARKLE FINISH



WETSTON WRINKLED TEXTURE FINISH




LUMEN OUTPUT (for color selectable not RGBW)

Model Number	Size	Wattage	Kelvin Temp field Selectable $\pm 500K$	Delivered Lumen $\pm 10\%$
SB-D102A/B/C/D/E/F	39.37" + 31.50"	90W	2700K/3500K/4000K or 3000K/3500K/4000K	5400 lm
	47.24" + 39.37"	110W	2700K/3500K/4000K or 3000K/3500K/4000K	6600 lm
	59.06" + 47.24"	130W	2700K/3500K/4000K or 3000K/3500K/4000K	7800 lm
	70.87" + 59.06"	150W	2700K/3500K/4000K or 3000K/3500K/4000K	9000 lm

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

Get Smart


Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"


SB-D102A Canopy mount

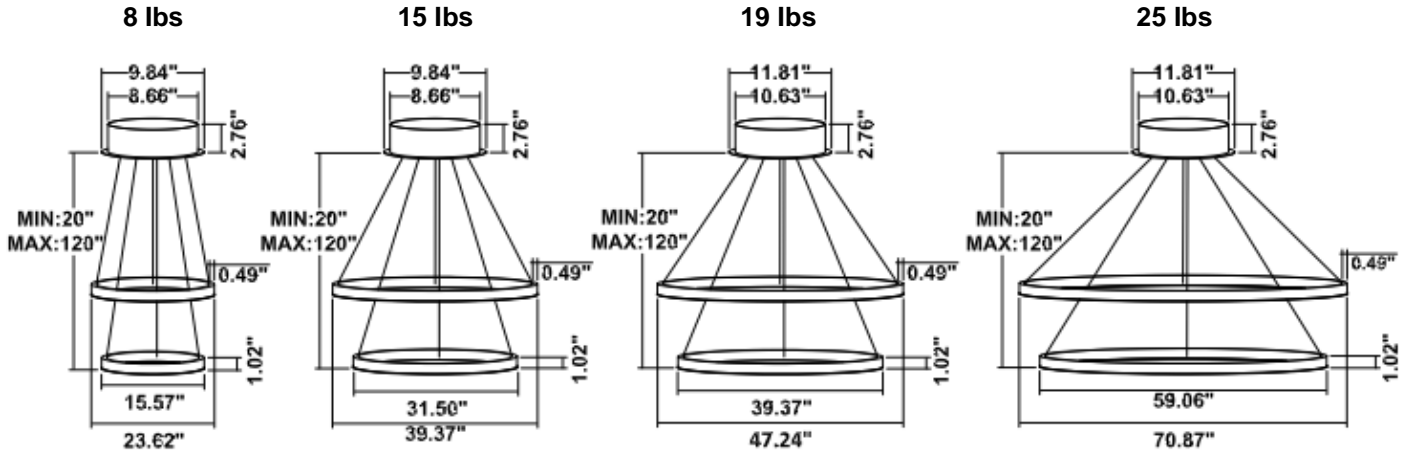


SB-D102B Canopy mount with accent ring

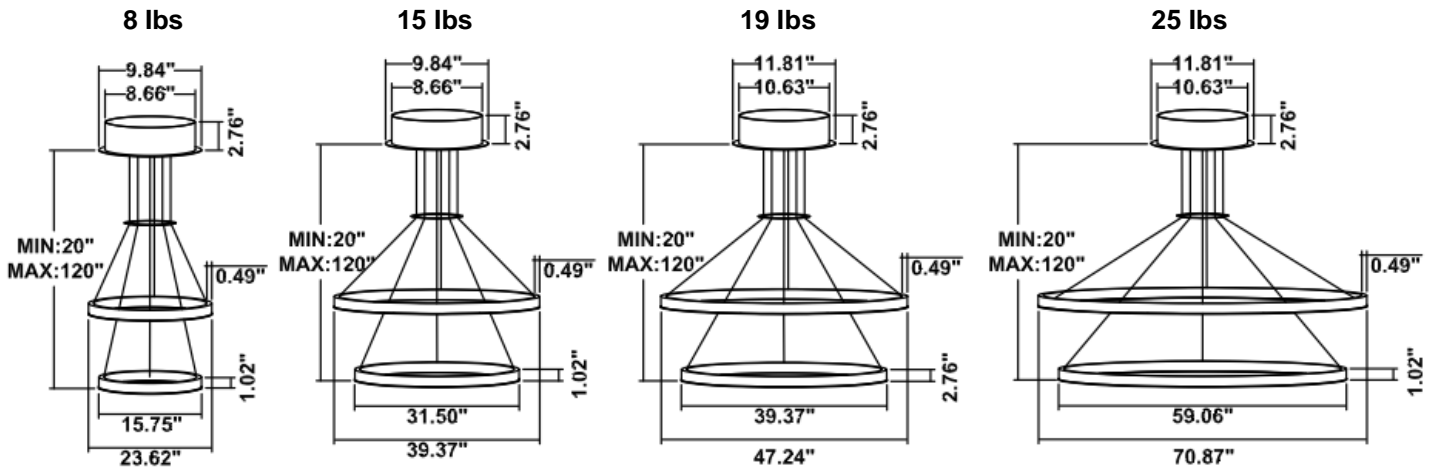


SB-D102C Remote mount and cables fixed directly in the ceiling (Driver box size: L10.83" X W3.78" X H1.81")

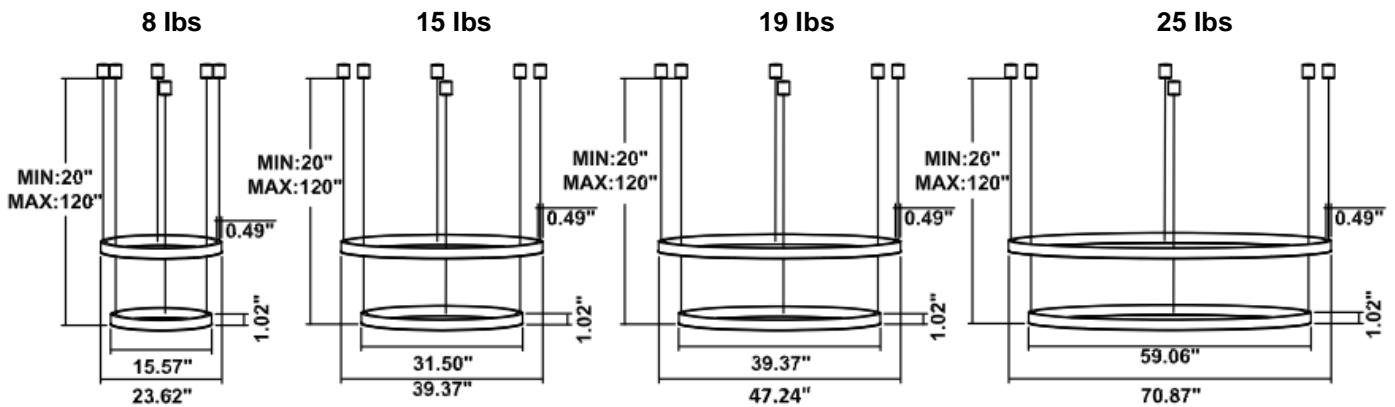


SB-D102D Canopy mount with swiveled rings

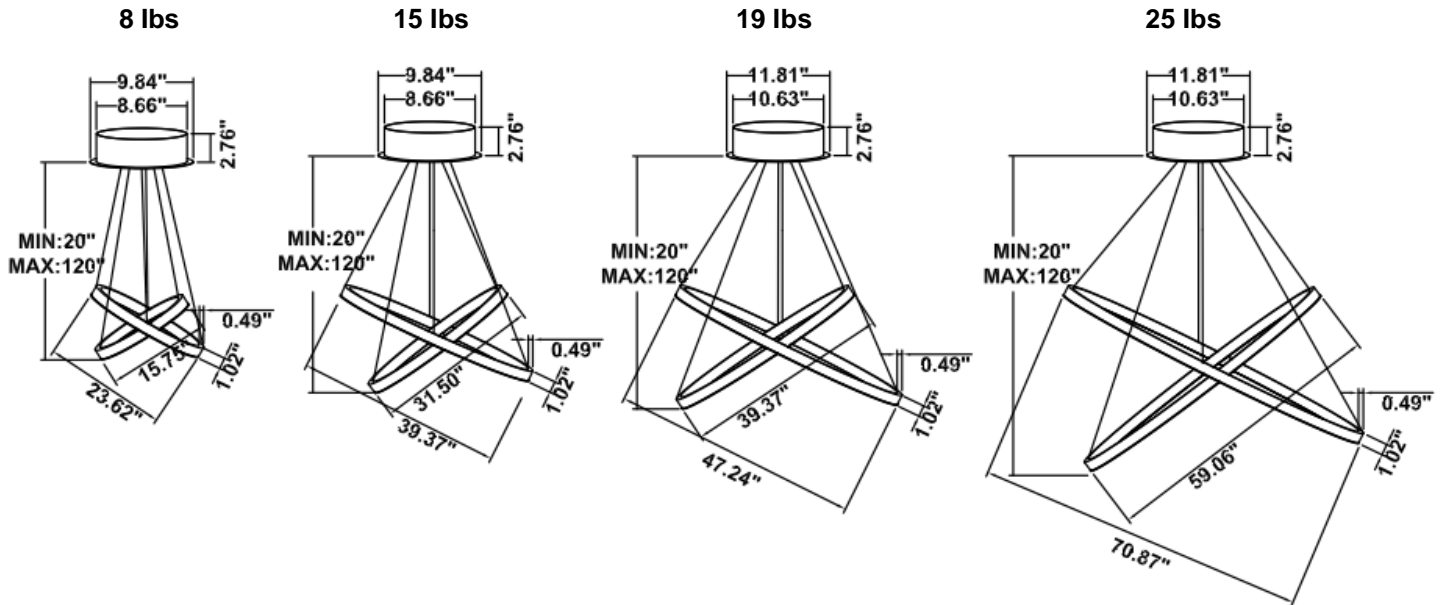

SB-D102E Canopy mount and cables fixed directly in the ceiling



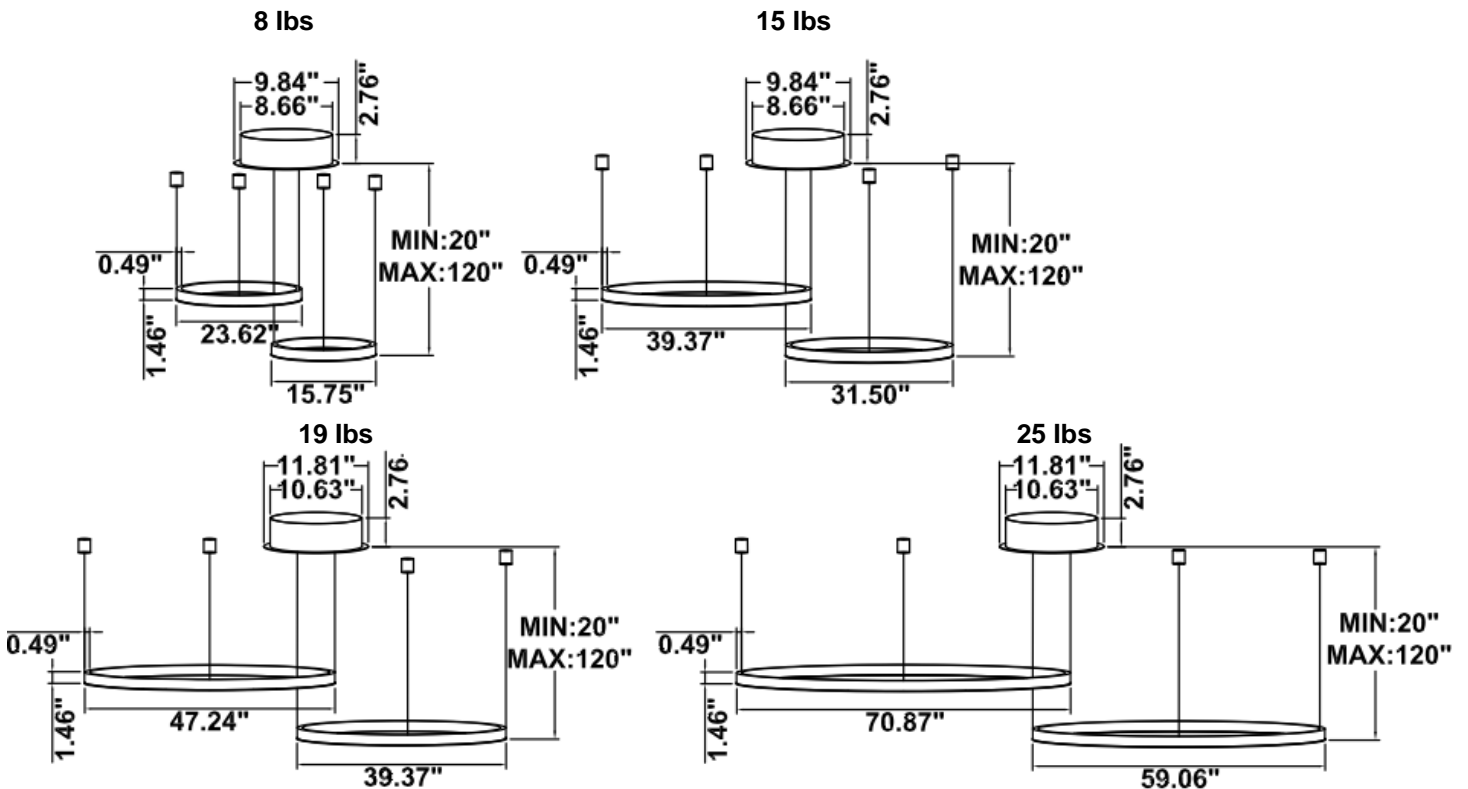


SB-D102F Canopy mount with swiveled rings and accent ring

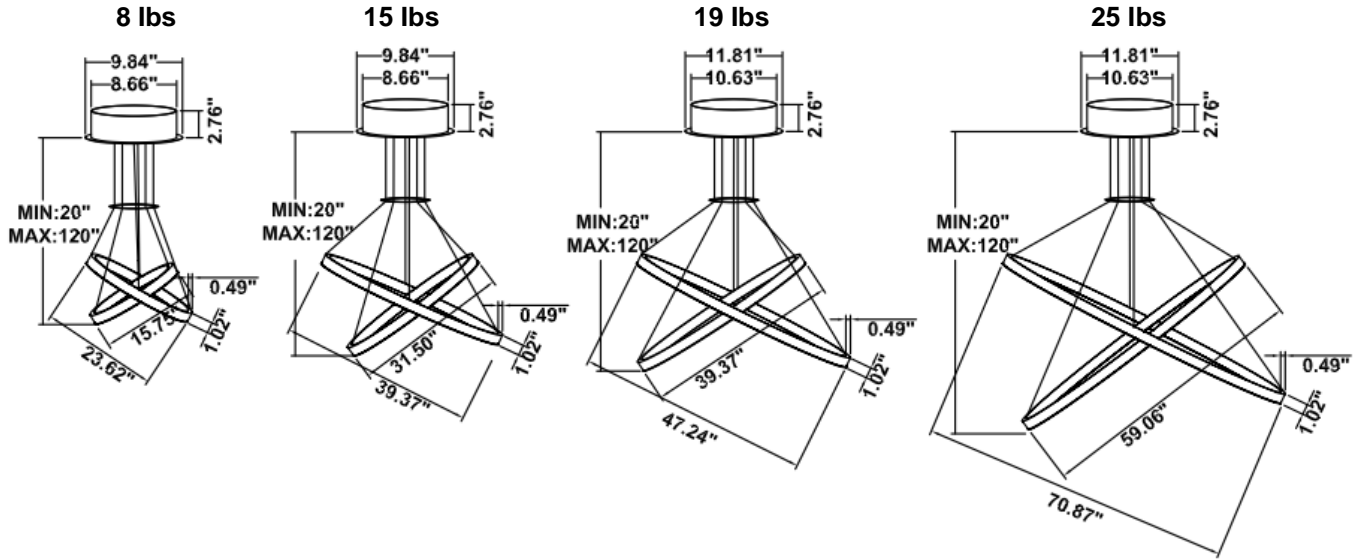


PHOTOMETRIC: Direct Illumination (Testing for single ring only)


SB-D101A20WSZ 15.75" 20W @ 4000K

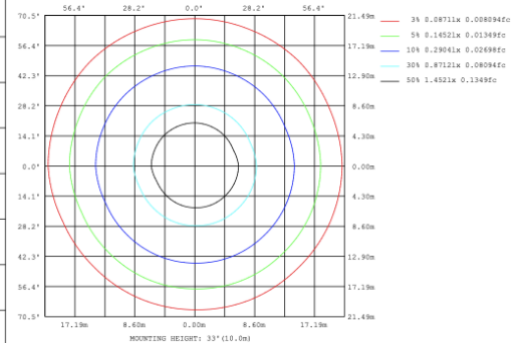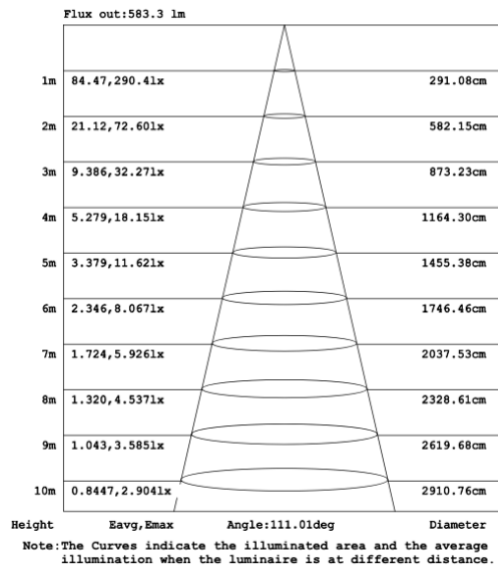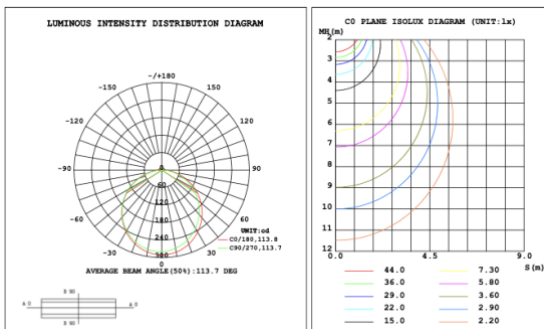


SB-D101A30WSZ 23.62" 30W @ 4000K

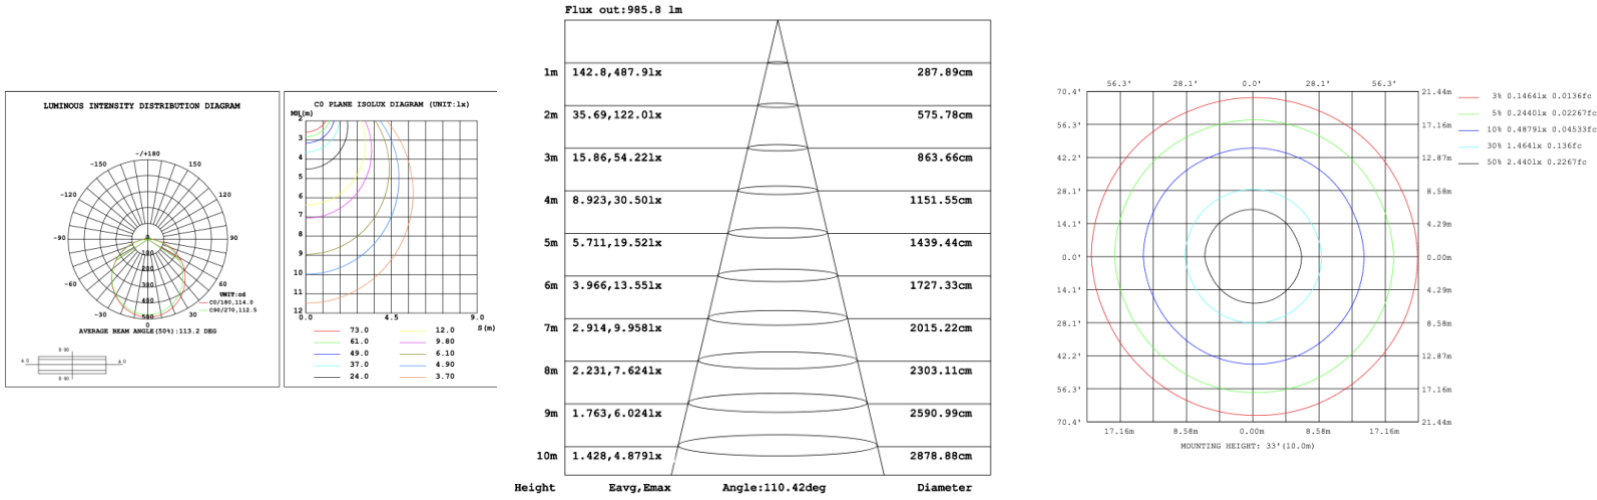




SB-D101A40WSZ 31.50" 40W @ 4000K

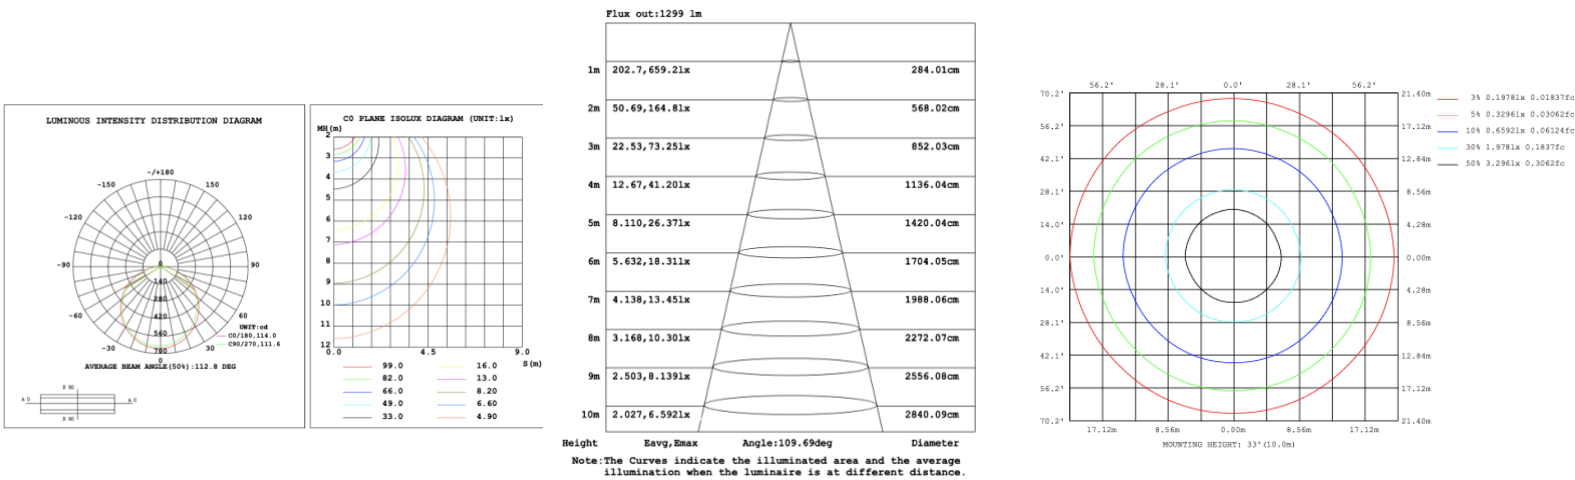




SB-D101A50WSZ 39.37" 50W @ 4000K

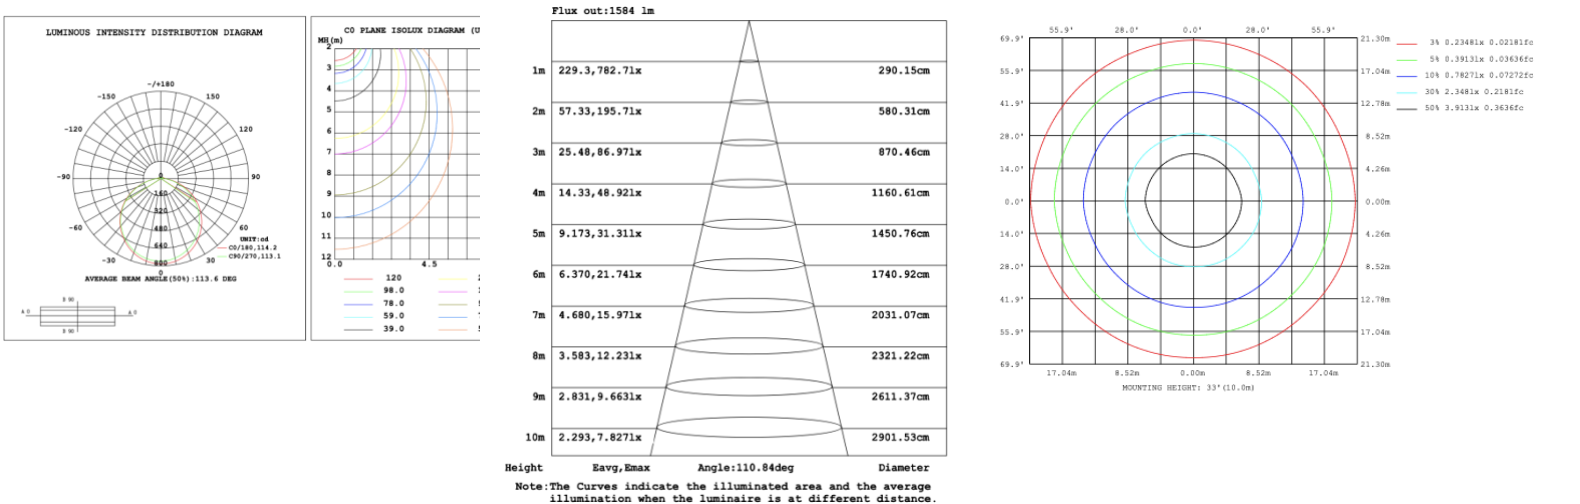

SB-D101A60WSZ 47.24" 60W @ 4000K

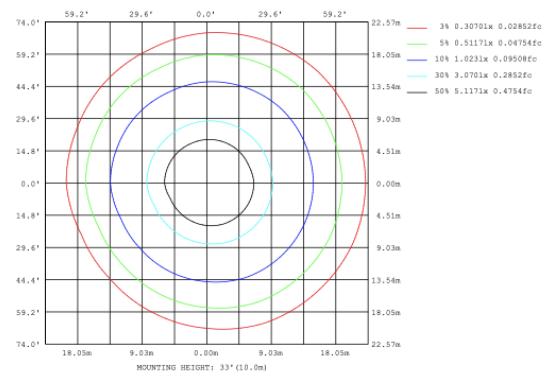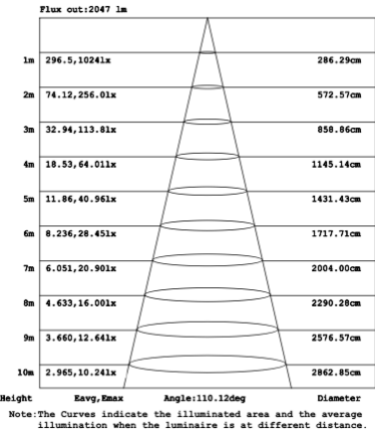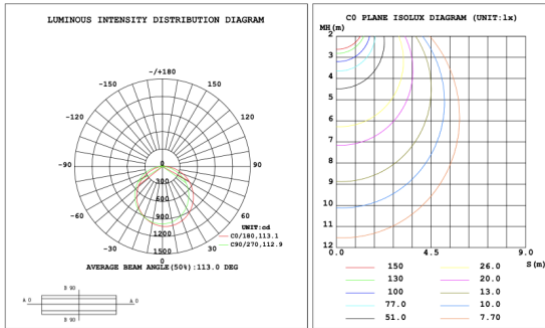

SB-D101A70WSZ 59.06" 70W @ 4000K

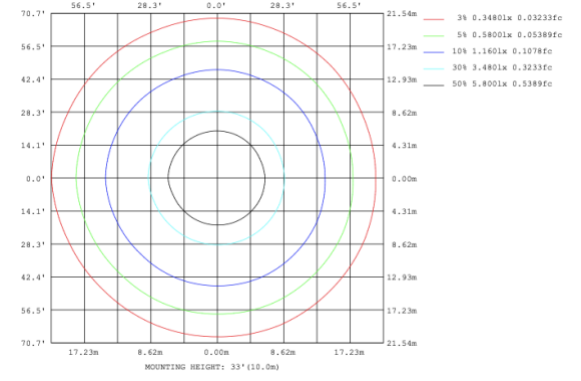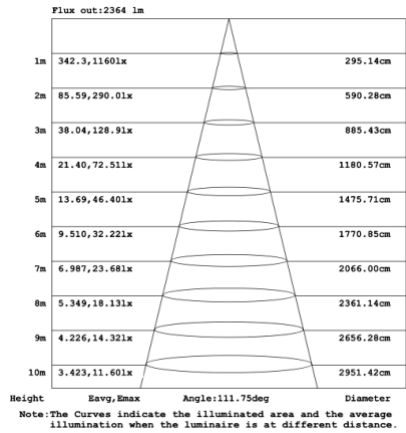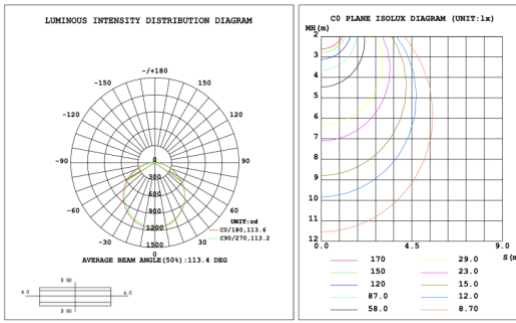

SB-D101A80WSZ 70.87" 80W @ 4000K

