


[View keystone 4 tier on website](#)



[View Video](#)

[View application photos](#)

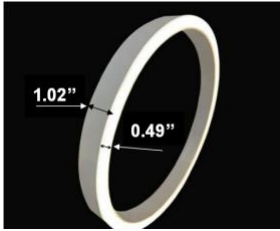

PRODUCT DESCRIPTION

The **Keystone** circular pendants are made of extruded aluminum with a direct only component and a glare free flash lens. Sizes range from 15.57" to 70.87" and can be combined as desired to create multiple ring masterpieces. Tunable white and RGBW. Over 6500 powder coated colors, ships assembled.

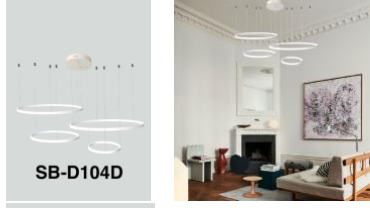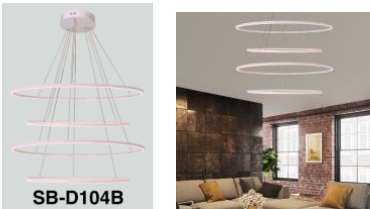

FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination direct.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- Lens: White frosted acrylic diffuser, Glare-free
- Fixture delivered lumens per watt ratio up to 60 LPW not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 2700K/3500K/4000K ; Or 3000K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch




MODEL INFORMATION:

Example: SB-D104A140WSB

| Products Series | Wattage/Size | "E" Kelvin temp options | "W" Controls (don't select this column if selected S or A) | "Z" Profile Finishes | "X" Aircraft Cable |
|-----------------|-----------------------------------|---|---|--|---------------------------------|
| *SB-D104A | *140W=39.37"+31.50"+23.62"+15.75" | *S=3000K/3500K/4000K Color | *Blank=1-10V dimming | *B=Black Jack | *Blank=10' foot 120" (Standard) |
| SB-D104F | 220W=59.06"+47.24"+39.37"+31.50" | Select by internal CCT Color Selector, 4000K factory color default set, CRI 90 | L=ELV / Triac dimming | S=Platinum Silver | 5'=5 foot 60" |
| | 260W=70.87"+59.06"+47.24"+39.37" | | C=Dali | W=Gloss White | 15'=15 foot 180" |
| SB-D104B | 100W=23.62"+15.75"+23.62"+15.75" | A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90 | D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system) | O=Oil Rubbed Bronze | 20'=20 foot 240" |
| | 140W=31.50"+23.62"+31.50"+23.62" | | | | 25'=25 foot 300" |
| | 180W=39.37"+31.50"+39.37"+31.50" | | | | 30'=30 foot 360" |
| SB-D104E | 220W=47.24"+39.37"+47.24"+39.37" | T=3K-4K Tunable White control by remote/wall control | Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice. | | |
| | 260W=59.06"+47.24"+59.06"+47.24" | R3= RGB+3000K | | | |
| | 300W=70.87"+59.06"+70.87"+59.06" | R4=RGB+4000K | | | |
| SB-D104C | 140W=15.75"+23.62"+31.50"+39.37" | Request price for other Kelvin temp and configurations | See control options | Find page 3 and 4 for color options or select from website Color Collections | |
| SB-D104G | 220W=31.50"+39.37"+47.24"+59.06" | | | | |
| | 260W=39.37"+47.24"+59.06"+70.87" | | | | |
| SB-D104D | 140W=15.75"+39.37"+31.50"+23.62" | | | | |
| | 220W=31.50"+59.06"+47.24"+39.37" | | | | |
| | 260W=39.37"+70.87"+59.06"+47.24" | | | | |

STANDARD COLOR FINISHES

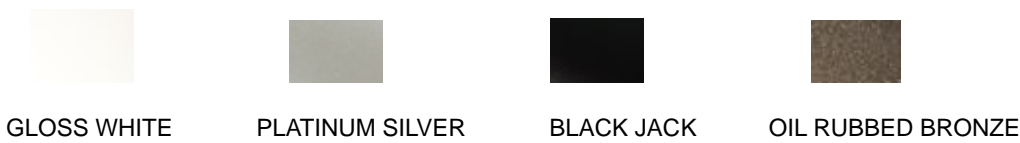


In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample, NFL football teams color or any RAL finish. Add Metallic, Sparkle, Transparent texture and originality to create a perfect custom products. Contact factory for quote


SOLID TONE FINISH



SHIMMER / GLITTER FINISH



PALLEON METALLIC TEXTURE FINISH

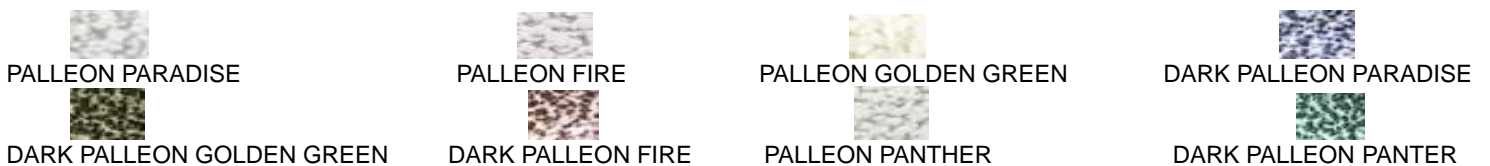

CHROME / SPECIALTY FINISH



SPARKLE FINISH



WETSTON WRINKLED TEXTURE FINISH



LUMEN OUTPUT (for color selectable not RGBW)

| Model Number | Size | Wattage | Kevin Temp field Selectable ±500K | Delivered Lumen ±10% |
|------------------|-----------------------------|---------|--|----------------------|
| SB-D104A/C/D/F/G | 39.37"+31.50"+23.62"+15.75" | 140W | 2700K/3500K/4000K or 3000K/3500K/4000K | 8400 lm |
| | 59.06"+47.24"+39.37"+31.50" | 220W | 2700K/3500K/4000K or 3000K/3500K/4000K | 13200 lm |
| | 70.87"+59.06"+47.24"+39.37" | 260W | 2700K/3500K/4000K or 3000K/3500K/4000K | 15600 lm |
| SB-D104B/E | 23.62"+15.75"+23.62"+15.75" | 100W | 2700K/3500K/4000K or 3000K/3500K/4000K | 6000 lm |
| | 31.50"+23.62"+31.50"+23.62" | 140W | 2700K/3500K/4000K or 3000K/3500K/4000K | 8400 lm |
| | 39.37"+31.50"+39.37"+31.50" | 180W | 2700K/3500K/4000K or 3000K/3500K/4000K | 10800 lm |
| | 47.24"+39.37"+47.24"+39.37" | 220W | 2700K/3500K/4000K or 3000K/3500K/4000K | 13200 lm |
| | 59.06"+47.24"+59.06"+47.24" | 260W | 2700K/3500K/4000K or 3000K/3500K/4000K | 15600 lm |
| | 70.87"+59.06"+70.87"+59.06" | 300W | 2700K/3500K/4000K or 3000K/3500K/4000K | 18000 lm |

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)


| PICTURE | MODEL NUMBER | DESCRIPTION |
|---------|----------------|--|
| | SB-EBP/5W/B | Factory installed Remote Emergency Battery Pack 5W 90 minutes |
| | SB-EBP/10.7W/B | Factory installed Remote Emergency Battery Pack 10.7W 90 minutes |
| | SB-EBP/17W/B | Factory installed Remote Emergency Battery Pack 17W 90 minutes |

RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"


SB-D104A Canopy mount

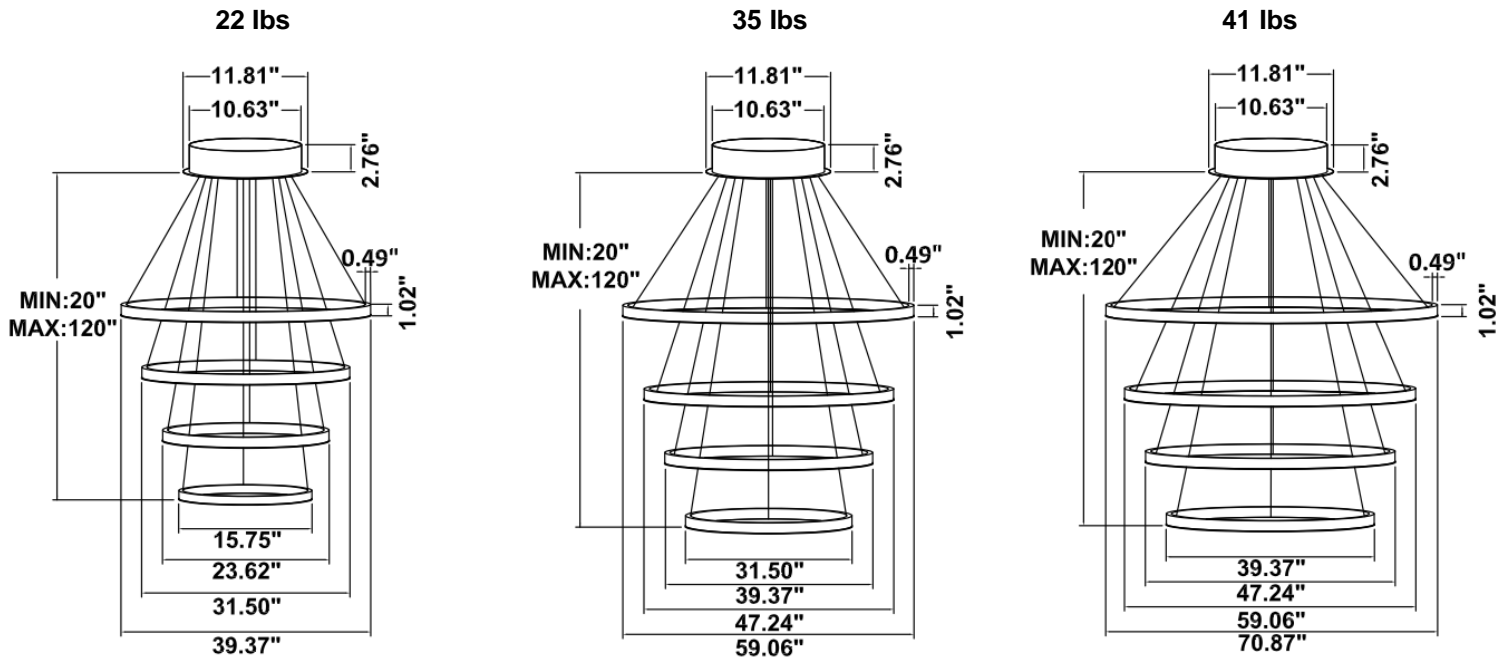


SB-D104B Canopy mount

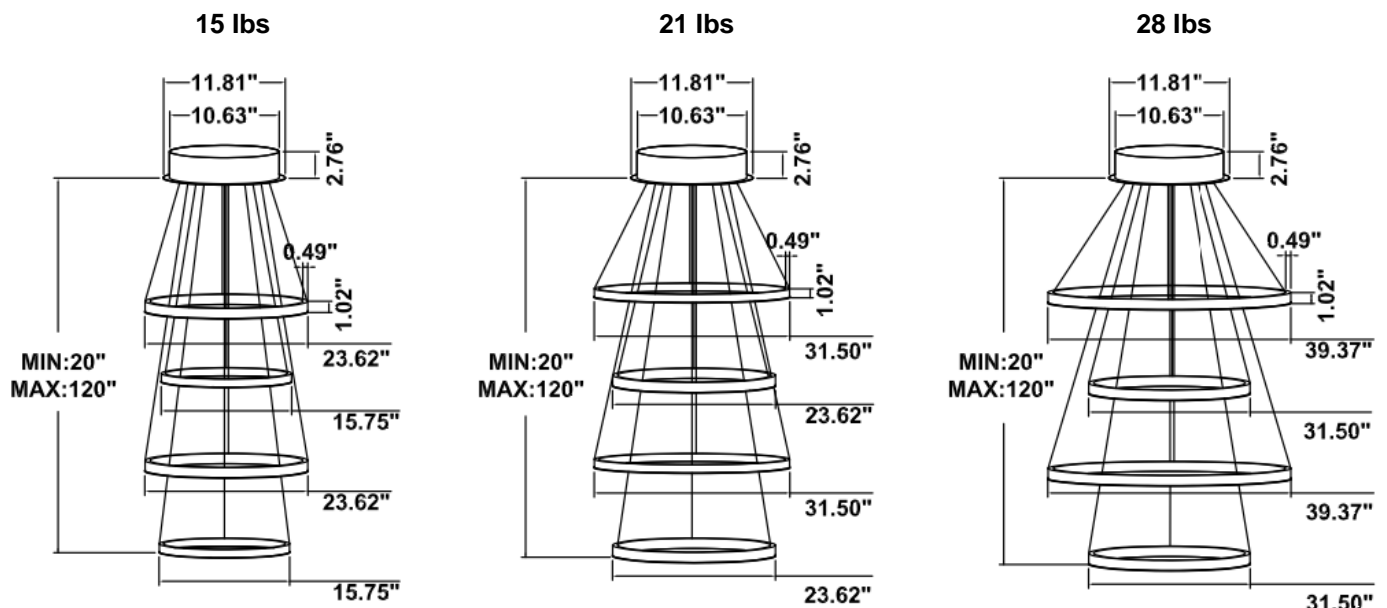


SB-D104B Canopy mount

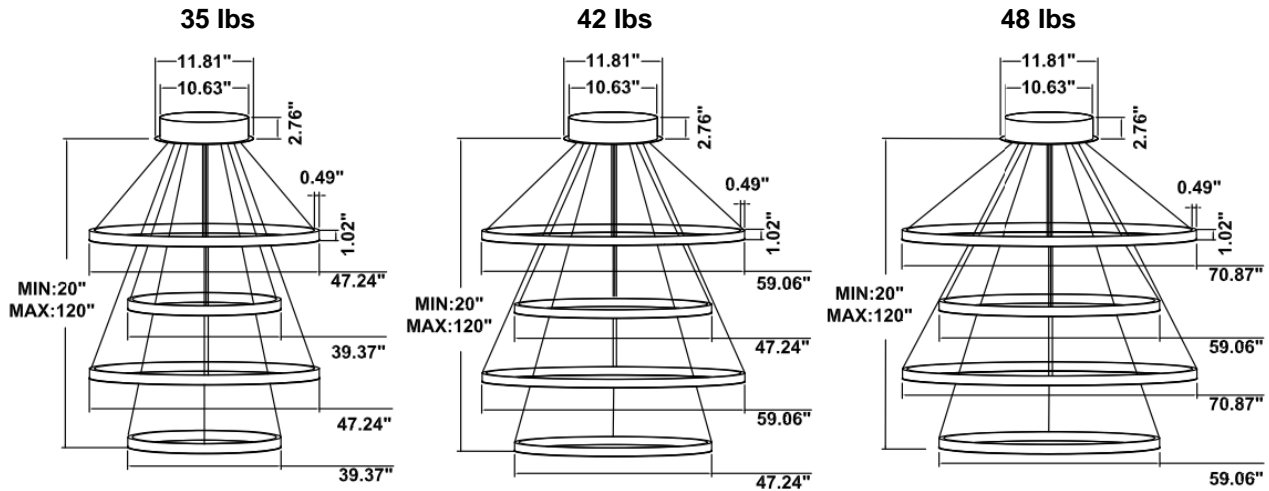


SB-D104C Canopy mount

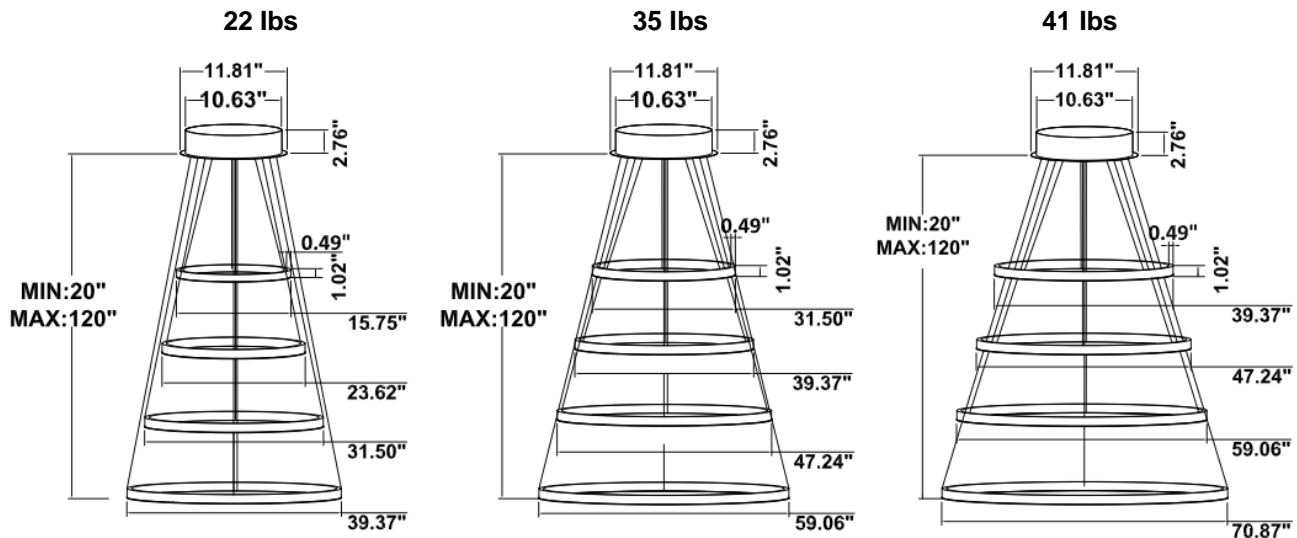


SB-D104D Canopy mount and cables fixed directly in the ceiling

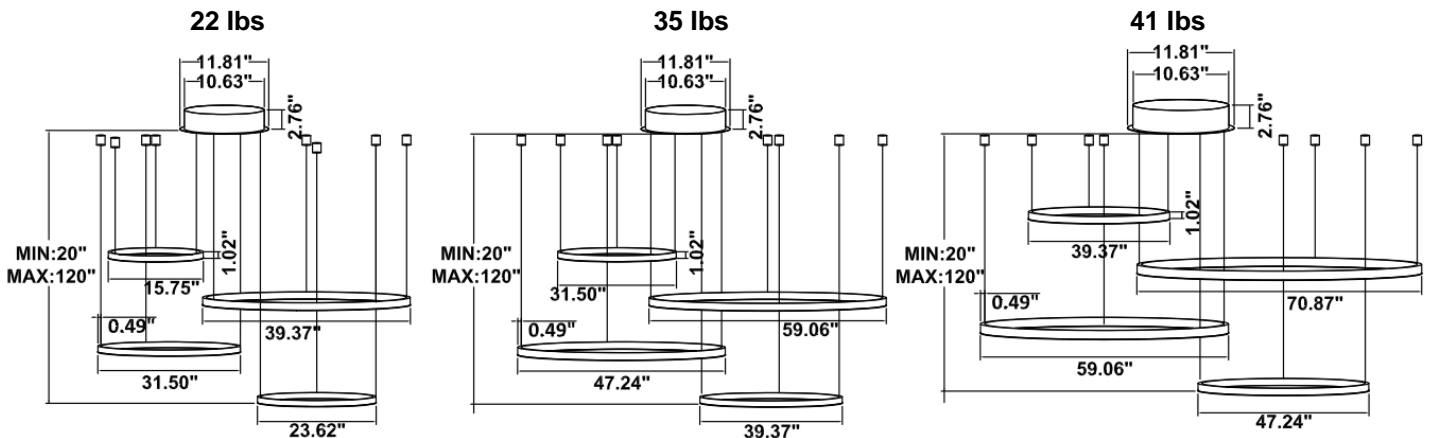


SB-D104E Canopy mount with accent ring

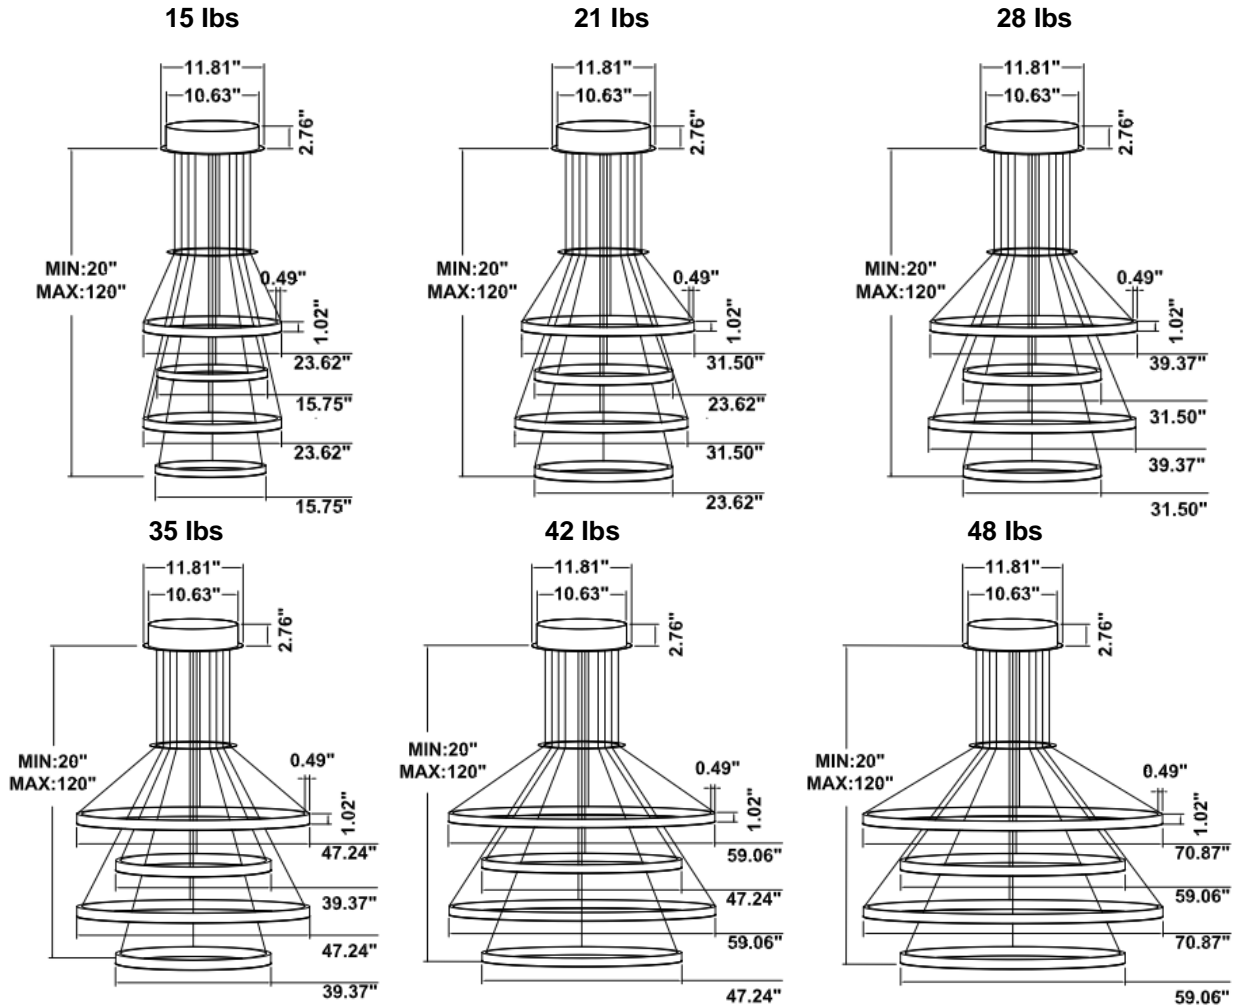

SB-D104F Canopy mount with accent ring

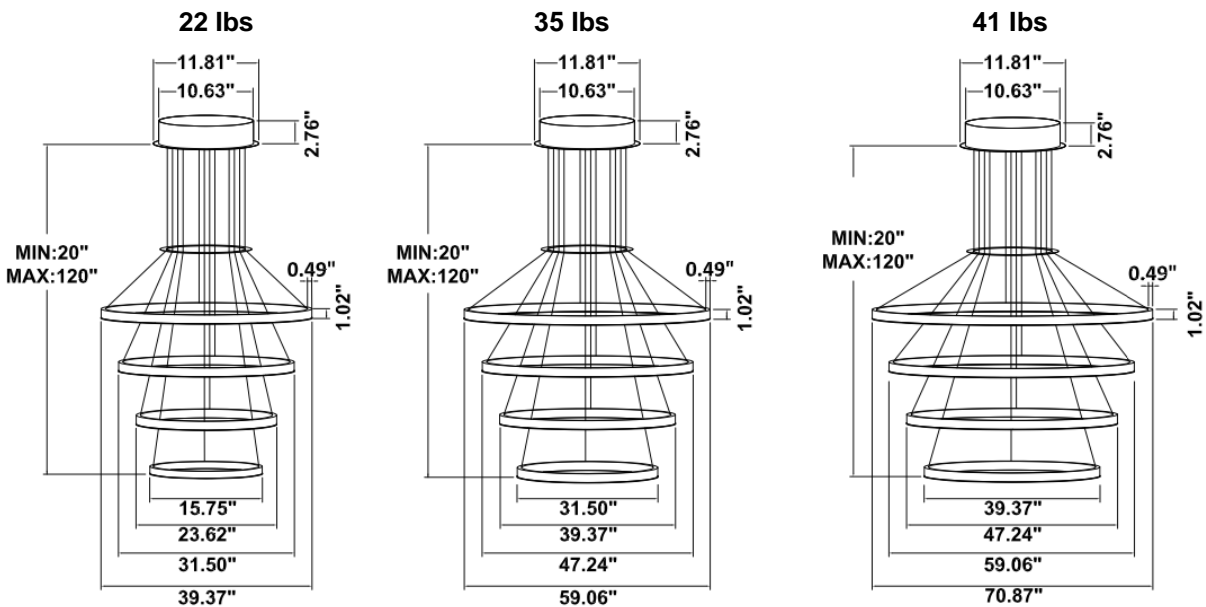


SB-D104G Canopy mount with accent ring

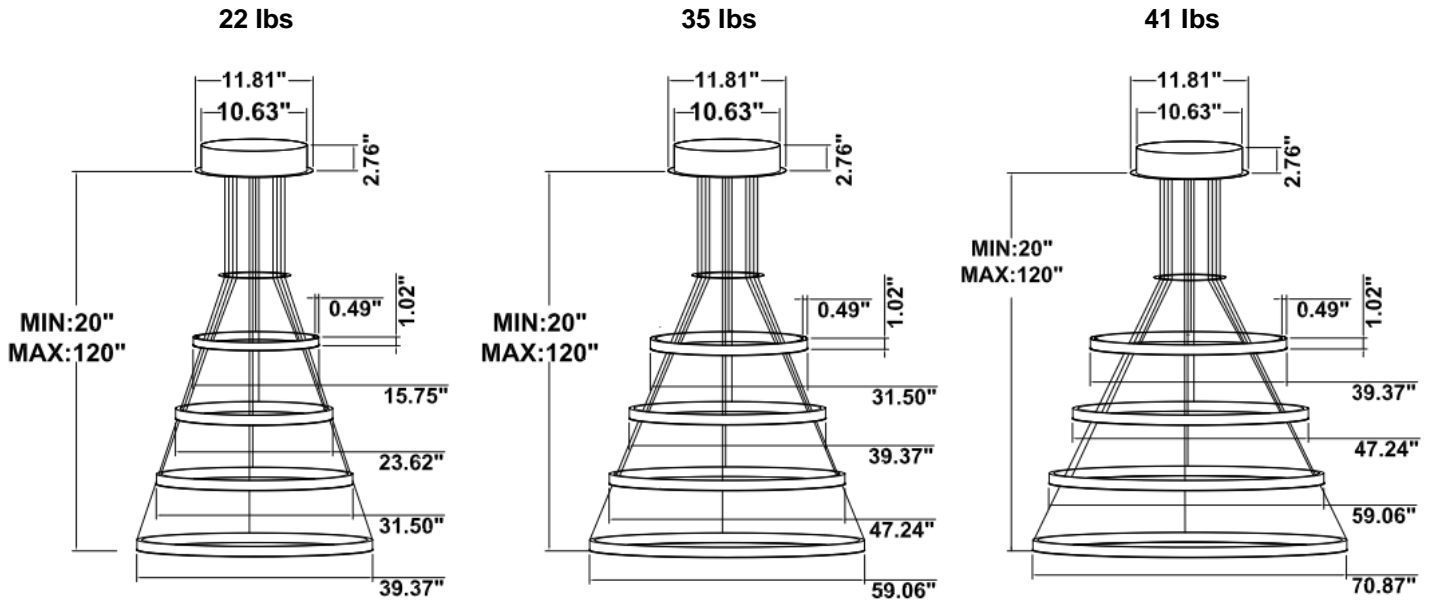

PHOTOMETRIC: Direct Illumination (Testing for single ring only)


SB-D101A20WSZ 15.75\" 20W @ 4000K

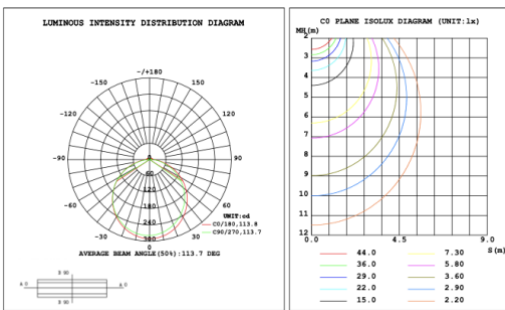


Flux out: 583.3 lm

| Height | Eavg, Emax | Angle: 111.01deg | Diameter |
|--------|----------------|------------------|-----------|
| 1m | 84.47, 290.4lx | | 291.08cm |
| 2m | 21.12, 72.60lx | | 582.15cm |
| 3m | 9.386, 32.27lx | | 873.23cm |
| 4m | 5.279, 18.15lx | | 1164.30cm |
| 5m | 3.379, 11.62lx | | 1455.38cm |
| 6m | 2.346, 8.06lx | | 1746.46cm |
| 7m | 1.724, 5.92lx | | 2037.53cm |
| 8m | 1.320, 4.53lx | | 2328.61cm |
| 9m | 1.043, 3.58lx | | 2619.68cm |
| 10m | 0.8447, 2.90lx | | 2910.76cm |


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

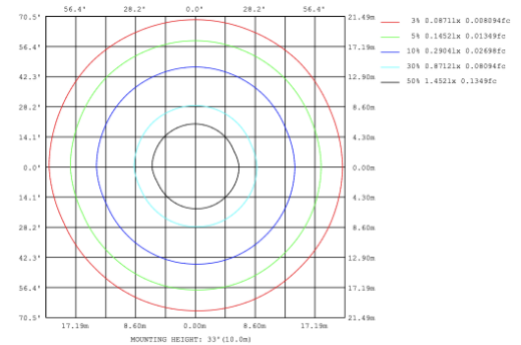


SB-D101A30WSZ 23.62" 30W @ 4000K

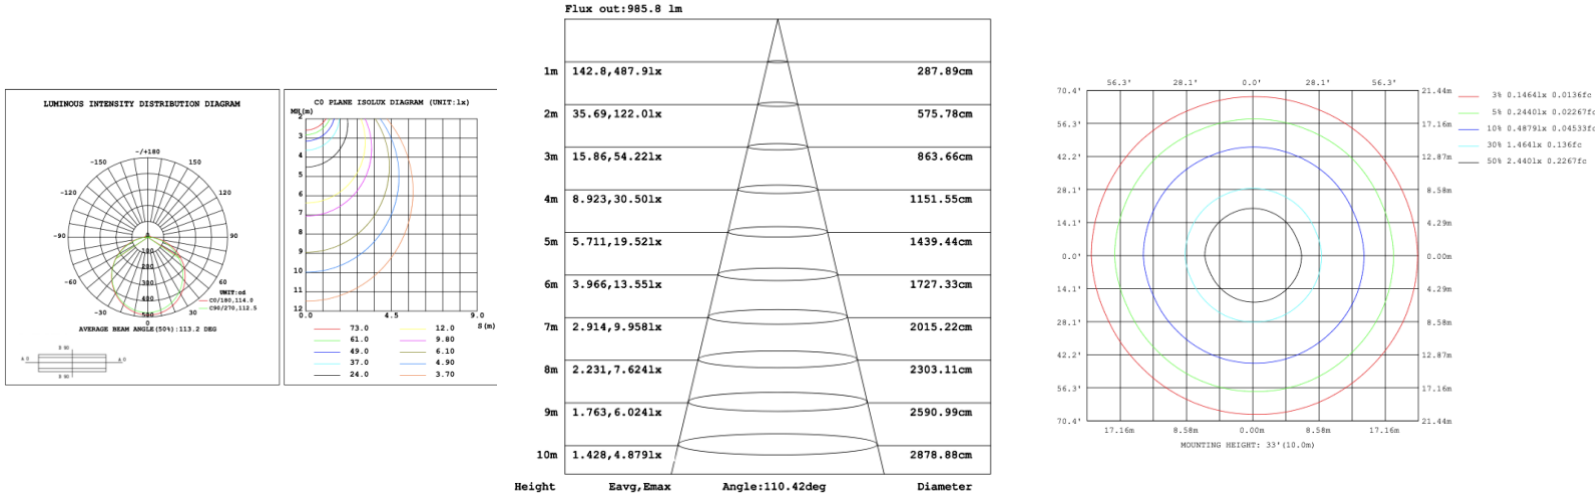



SB-D101A40WSZ 31.50" 40W @ 4000K

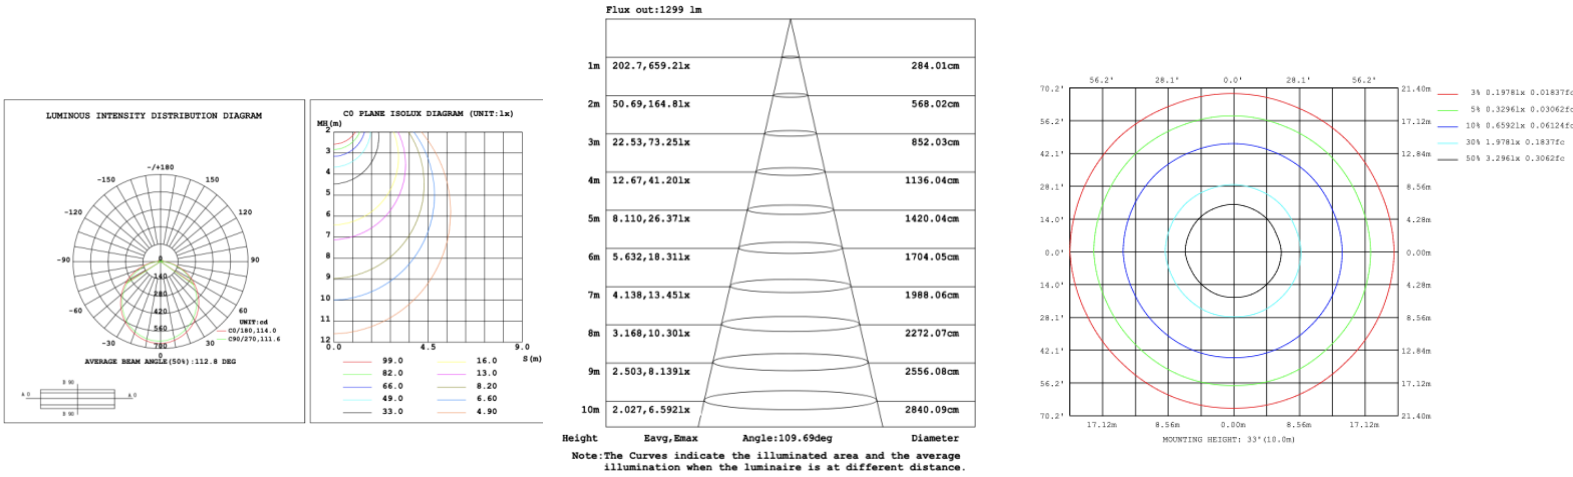

SB-D101A50WSZ 39.37" 50W @ 4000K

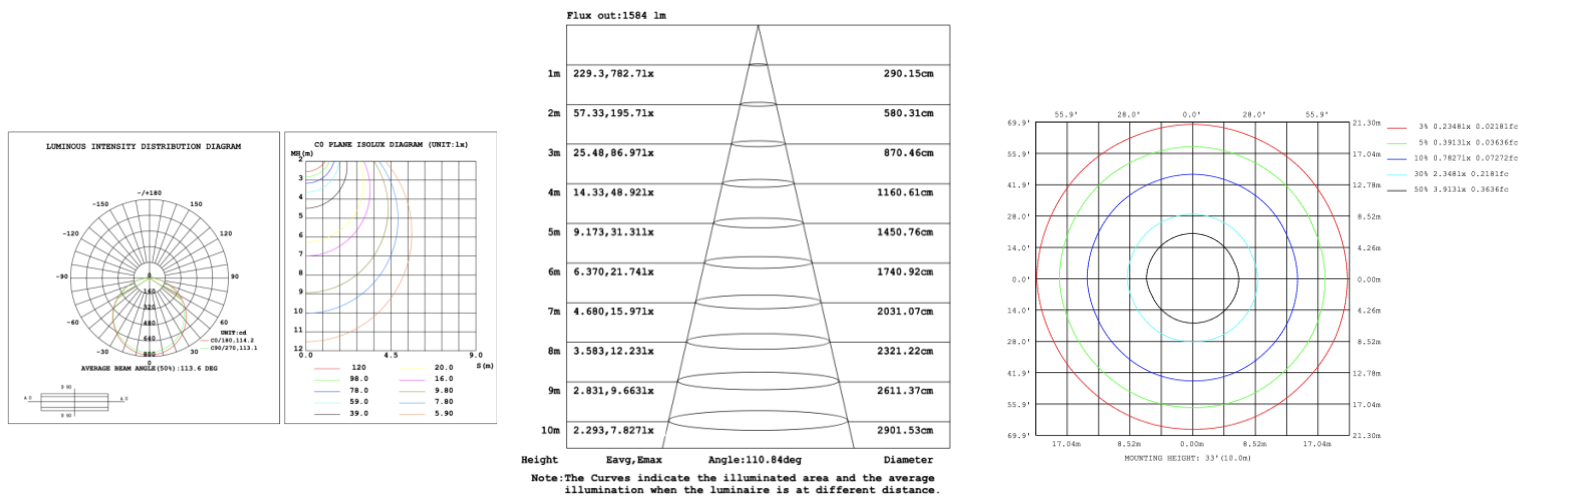


SB-D101A60WSZ 47.24" 60W @ 4000K

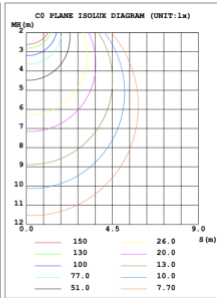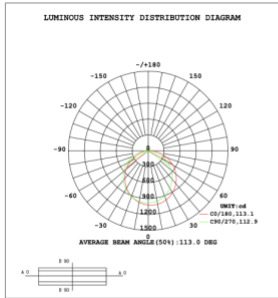



Flux out:2047 lm

| Height | Eavg,Emax | Angle:110.12deg | Diameter |
|--------|---------------|-----------------|-----------|
| 1m | 296.5,1024lx | | 286.29cm |
| 2m | 74.12,256.0lx | | 572.57cm |
| 3m | 32.94,113.8lx | | 858.86cm |
| 4m | 18.53,64.0lx | | 1145.14cm |
| 5m | 11.86,40.96lx | | 1431.43cm |
| 6m | 8.236,28.45lx | | 1717.71cm |
| 7m | 6.051,20.90lx | | 2004.00cm |
| 8m | 4.633,16.00lx | | 2290.28cm |
| 9m | 3.660,12.64lx | | 2576.57cm |
| 10m | 2.965,10.24lx | | 2862.85cm |

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

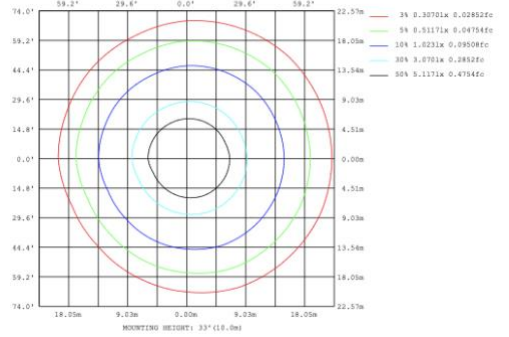


SB-D101A70WSZ 59.06" 70W @ 4000K

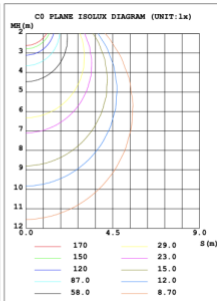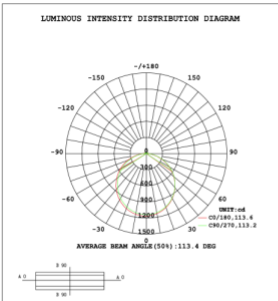



Flux out:2364 lm

| Height | Eavg,Emax | Angle:111.75deg | Diameter |
|--------|---------------|-----------------|-----------|
| 1m | 342.3,1160lx | | 295.14cm |
| 2m | 85.59,290.0lx | | 590.28cm |
| 3m | 38.04,128.9lx | | 885.43cm |
| 4m | 21.40,72.5lx | | 1180.57cm |
| 5m | 13.69,46.40lx | | 1475.71cm |
| 6m | 9.510,32.22lx | | 1770.85cm |
| 7m | 6.987,23.68lx | | 2066.00cm |
| 8m | 5.349,18.13lx | | 2361.14cm |
| 9m | 4.226,14.32lx | | 2656.28cm |
| 10m | 3.423,11.60lx | | 2951.42cm |

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

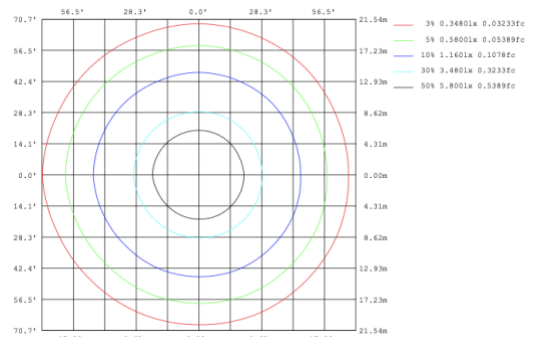

SB-D101A80WSZ 70.87" 80W @ 4000K

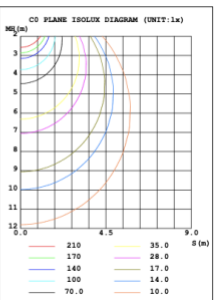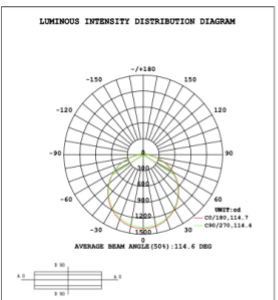

Flux out:2941 lm

| Height | Eavg,Emax | Angle:113.14deg | Diameter |
|--------|---------------|-----------------|-----------|
| 1m | 394.8,1394lx | | 302.99cm |
| 2m | 98.70,348.5lx | | 605.99cm |
| 3m | 43.87,154.9lx | | 908.98cm |
| 4m | 24.67,87.12lx | | 1211.98cm |
| 5m | 15.79,55.76lx | | 1514.97cm |
| 6m | 10.97,38.72lx | | 1817.96cm |
| 7m | 8.057,28.45lx | | 2120.96cm |
| 8m | 6.169,21.78lx | | 2423.95cm |
| 9m | 4.874,17.21lx | | 2726.95cm |
| 10m | 3.948,13.94lx | | 3029.94cm |

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

