

[View keystone 5 tier on website](#)

[View Video](#)

[View application photos](#)

## PRODUCT DESCRIPTION

The **Keystone** circular pendants are made of extruded aluminum with a direct only component and a glare free flash lens. Sizes range from 15.57" to 70.87" and can be combined as desired to create multiple ring masterpieces. Tunable white and RGBW. Over 6500 powder coated colors, ships assembled.

### FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination direct.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- Lens: White frosted acrylic diffuser, Glare-free
- Fixture delivered lumens per watt ratio up to 60 LPW not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.

### SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K ; Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

### PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch




SB-D105A



SB-D105B



SB-D105C

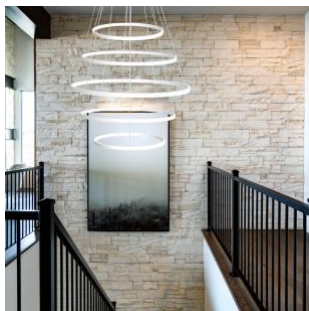

SB-105D

**MODEL INFORMATION:**

**Example: SB-D105A220WSB**

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-D105A	*200W=47.24"+39.37"+31.50"+23.62"+15.57"	*S=3000K/3500K/4000K	*Blank=1-10V dimming	*B=Black Jack	*Blank=10' foot 120" (Standard)
	250W=59.06"+47.24"+39.37"+31.50"+23.62"	Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	L=ELV / Triac dimming	S=Platinum Silver	5'=5 foot 60"
	300W=70.87"+59.06"+47.24"+39.37"+31.50"		C=Dali	W=Gloss White	15'=15 foot 180"
SB-D105B SB-D105C	190W=23.62"+31.50"+39.37"+31.50"+23.62"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	O=Oil Rubbed Bronze	20'=20 foot 240"
	240W=31.50"+39.37"+47.24"+39.37"+31.50"				25'=25 foot 300"
	290W=39.37"+47.24"+59.06"+47.24"+39.37"				30'=30 foot 360"
	340W=47.24"+59.06"+70.87"+59.06"+47.24"				
SB-D105D	140W=23.62"+31.50"+15.75"+23.62"+15.75"	T=3K-4K Tunable White control by remote/wall control	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.		
	180W=31.50"+39.37"+23.62"+31.50"+23.62"	R3= RGB+3000K			
	190W=31.50"+47.24"+15.75"+23.62"+39.37"	R4=RGB+4000K			
	240W=39.37"+47.24"+31.50"+39.37"+31.50"	<b>Request price for other Kelvin temp and configurations</b>	<a href="#">See control options</a>	<b>Find page 3 for color options or select from website <a href="#">Color Collections</a></b>	
	290W=47.24"+59.06"+39.37"+47.24"+39.37"				
	340W=59.06"+70.87"+47.24"+59.06"+47.24"				

**STANDARD COLOR FINISHES**



In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample, NFL football teams color or any RAL finish. Add Metallic, Sparkle, Transparent texture and originality to create a perfect custom products. Contact factory for quote


### SOLID TONE FINISH



### SHIMMER / GLITTER FINISH



### PALLEON METALLIC TEXTURE FINISH

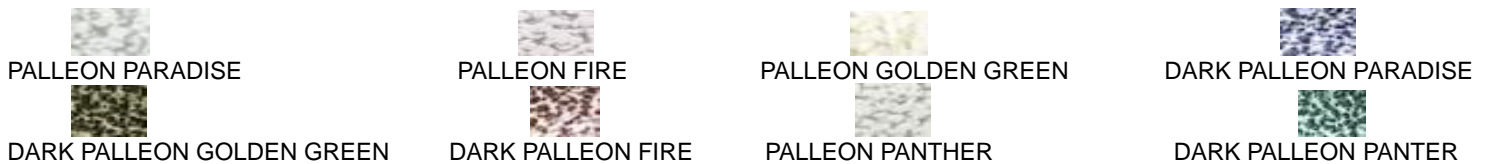

### CHROME / SPECIALTY FINISH



### SPARKLE FINISH



### WETSTON WRINKLED TEXTURE FINISH




## LUMEN OUTPUT (for color selectable not RGBW)

Model Number	Size	Wattage	Kelvin Temp field Selectable ±500K	Delivered Lumen ±10%
SB-D105A	47.24"+39.37"+31.50"+23.62"+15.57"	200W	2700K/3500K/4000K or 3000K/3500K/4000K	12000 lm
	59.06"+47.24"+39.37"+31.50"+23.62"	250W	2700K/3500K/4000K or 3000K/3500K/4000K	15000 lm
	70.87"+59.06"+47.24"+39.37"+31.50"	300W	2700K/3500K/4000K or 3000K/3500K/4000K	18000 lm
SB-D105B/C	23.62"+31.50"+39.37"+31.50"+23.62"	190W	2700K/3500K/4000K or 3000K/3500K/4000K	11400 lm
	31.50"+39.37"+47.24"+39.37"+31.50"	240W	2700K/3500K/4000K or 3000K/3500K/4000K	14400 lm
	39.37"+47.24"+59.06"+47.24"+39.37"	290W	2700K/3500K/4000K or 3000K/3500K/4000K	17400 lm
	47.24"+59.06"+70.87"+59.06"+47.24"	340W	2700K/3500K/4000K or 3000K/3500K/4000K	20400 lm
SB-D105D	23.62"+31.50"+15.75"+23.62"+15.75"	140W	2700K/3500K/4000K or 3000K/3500K/4000K	8400 lm
	31.50"+39.37"+23.62"+31.50"+23.62"	180W	2700K/3500K/4000K or 3000K/3500K/4000K	10800 lm
	31.50"+47.24"+15.75"+23.62"+39.37"	190W	2700K/3500K/4000K or 3000K/3500K/4000K	11400 lm
	39.37"+47.24"+31.50"+39.37"+31.50"	240W	2700K/3500K/4000K or 3000K/3500K/4000K	14400 lm
	47.24"+59.06"+39.37"+47.24"+39.37"	290W	2700K/3500K/4000K or 3000K/3500K/4000K	17400 lm
	59.06"+70.87"+47.24"+59.06"+47.24"	340W	2700K/3500K/4000K or 3000K/3500K/4000K	20400 lm

## EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)


PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

## RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

**DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"**


**SB-D105A Canopy mount**

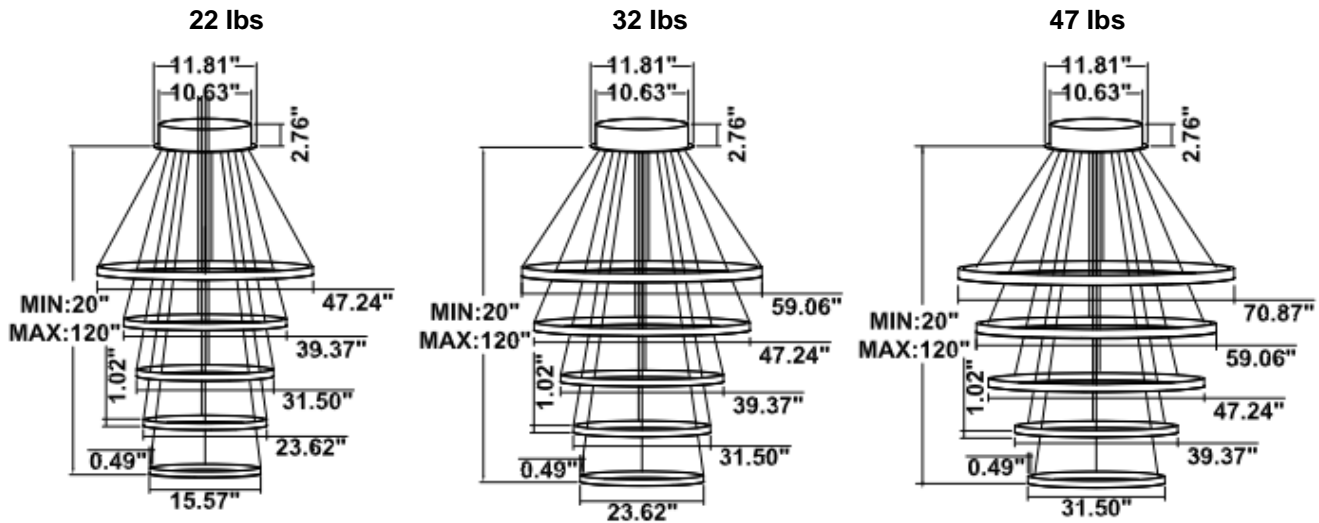


**SB-D105B Canopy mount**

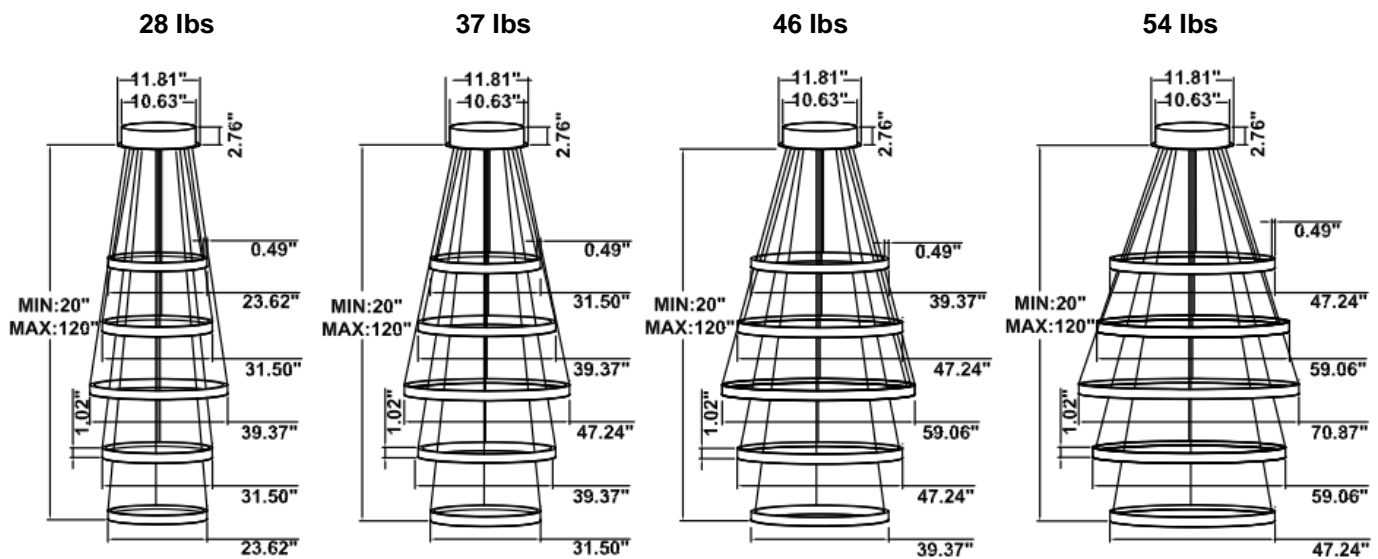

**SB-D105C Remote mount and cables fixed directly in the ceiling (Driver box size: L10.83" X W3.78" X H1.81")**

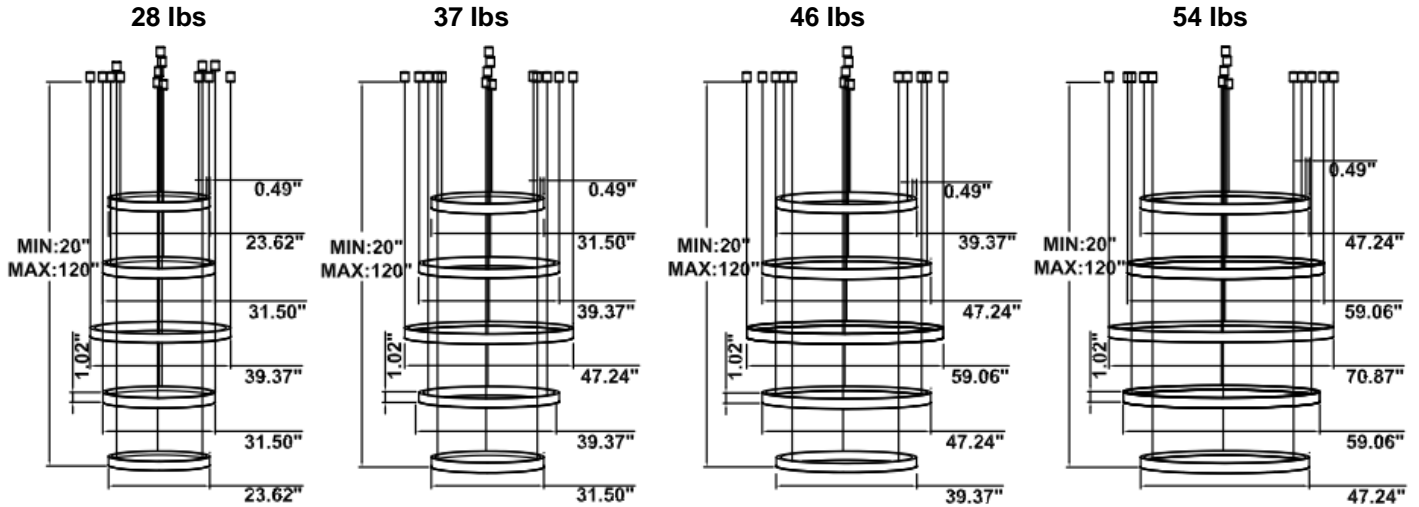


**SB-D105D Canopy mount**

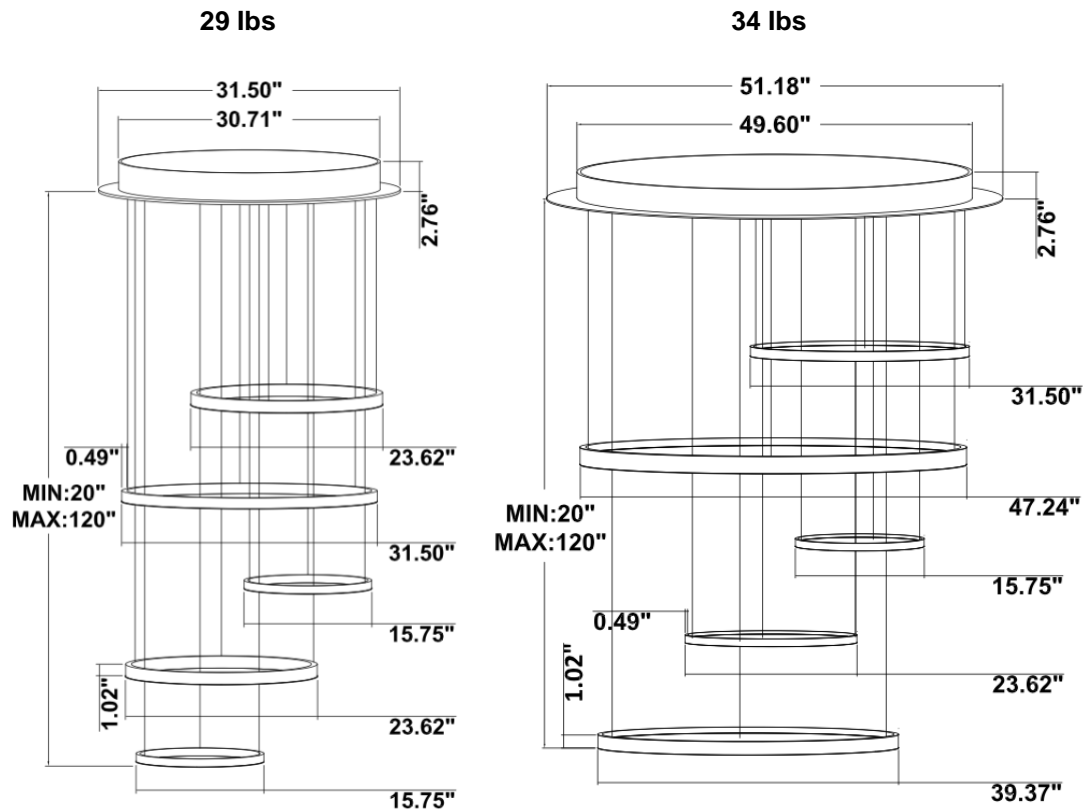




**SB-D105D Canopy mount and cables fixed directly in the ceiling**

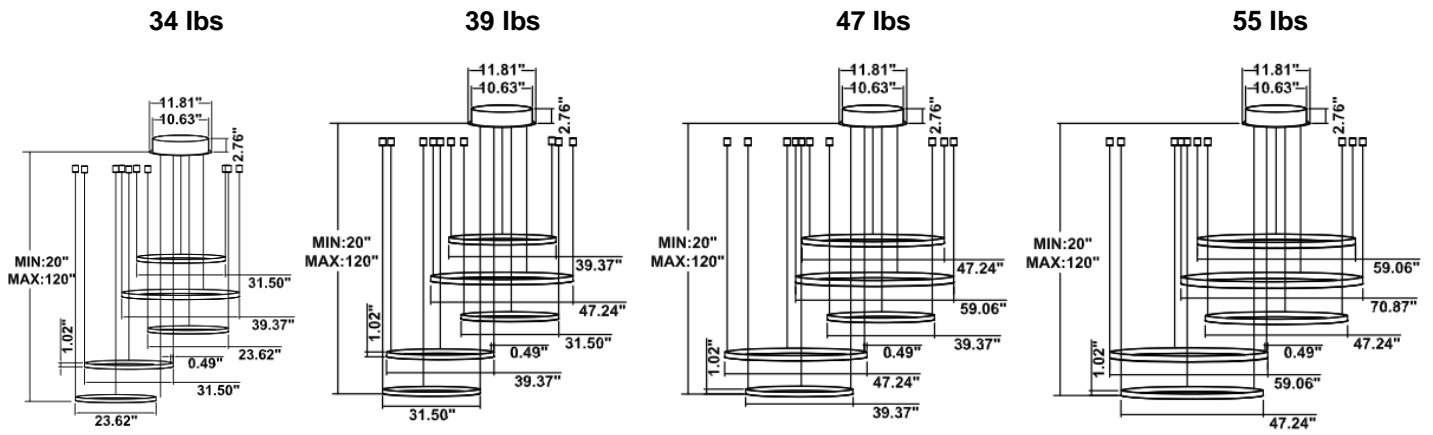


**PHOTOMETRIC: Direct Illumination (Testing for single ring only)**


**SB-D101A20WSZ 15.75\"/>**

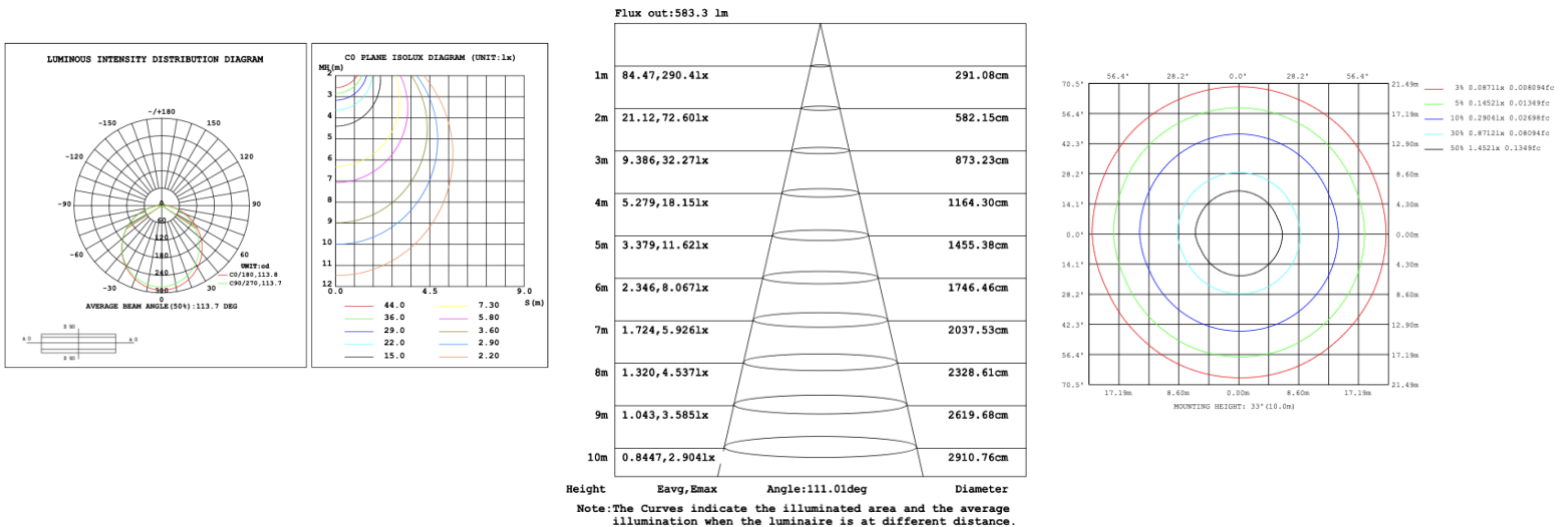


### SB-D101A30WSZ 23.62" 30W @ 4000K

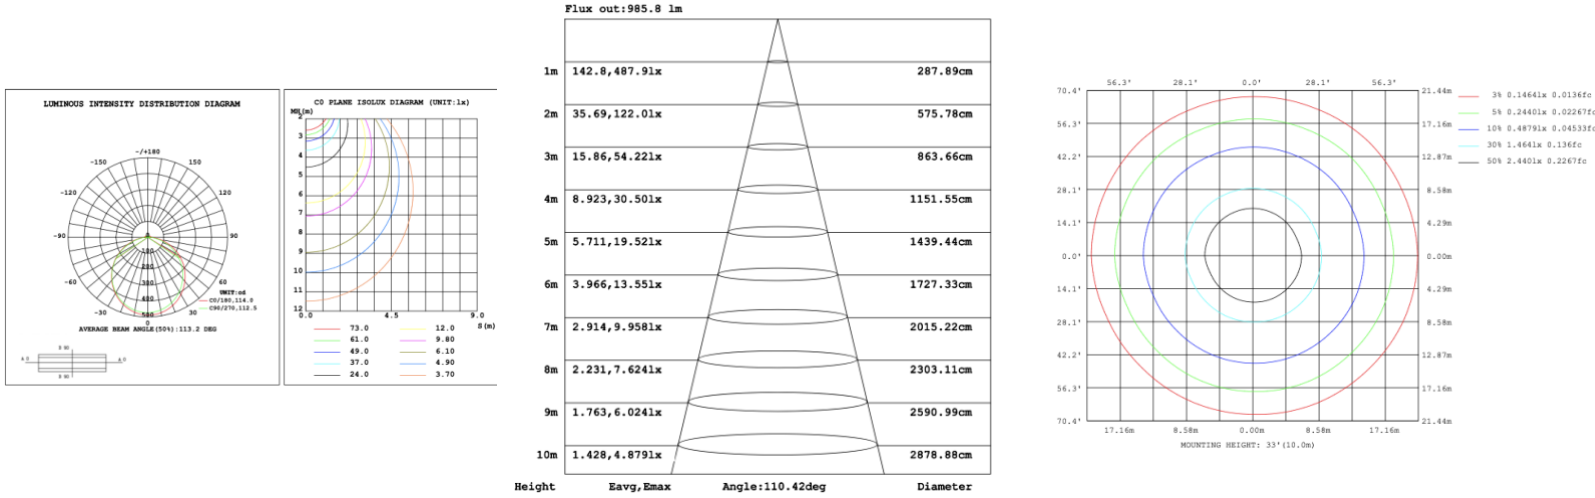

### SB-D101A40WSZ 31.50" 40W @ 4000K



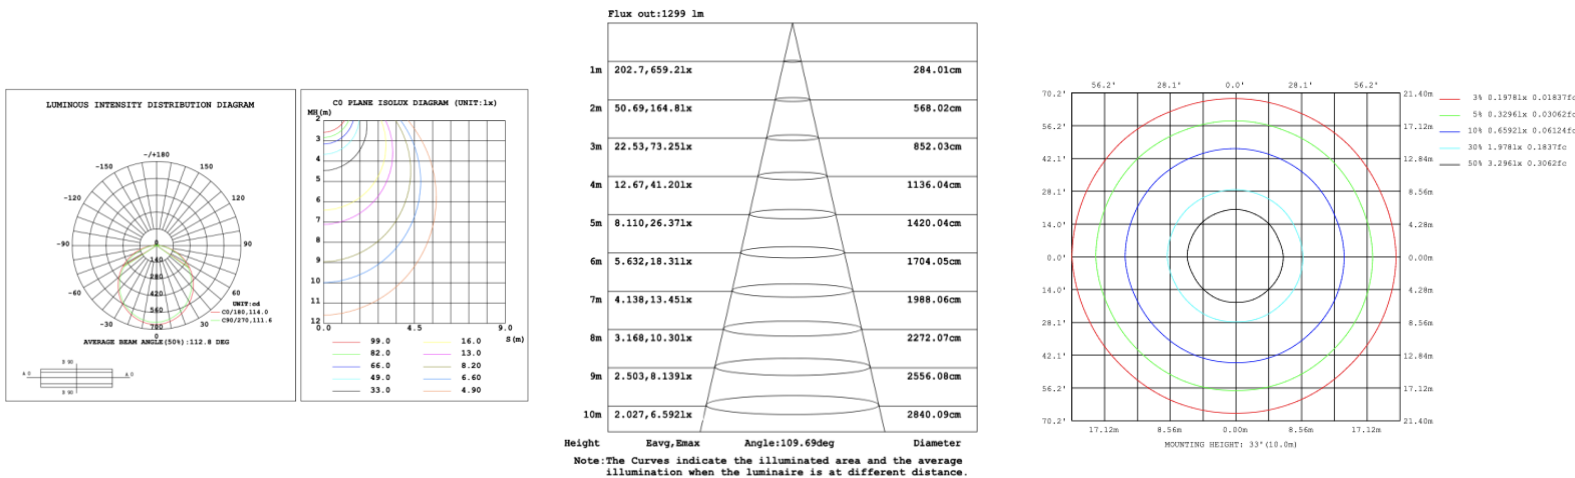


### SB-D101A50WSZ 39.37" 50W @ 4000K

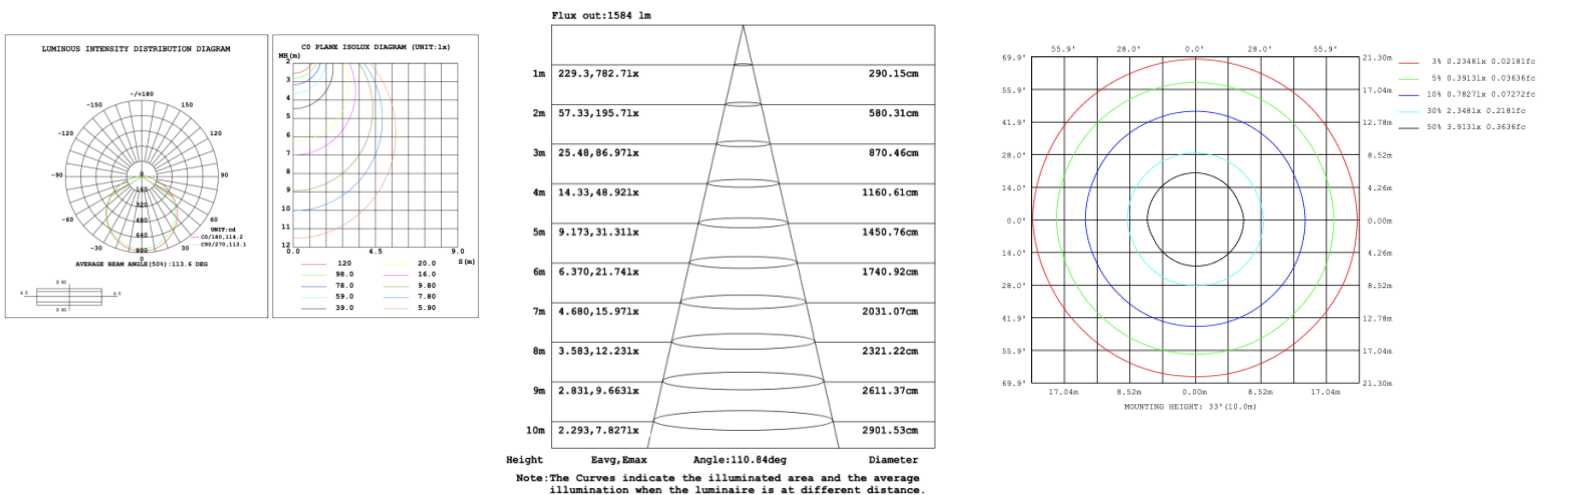






### SB-D101A60WSZ 47.24" 60W @ 4000K

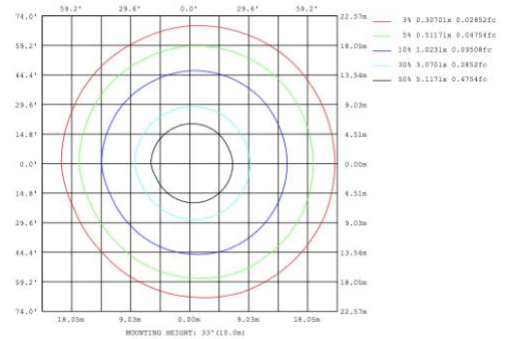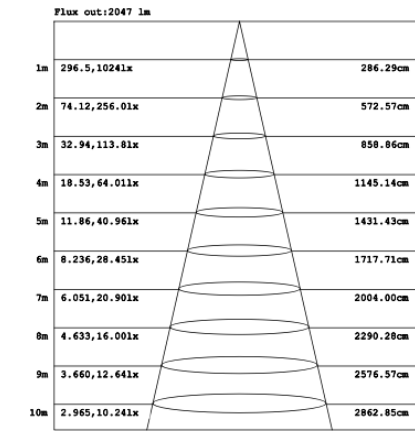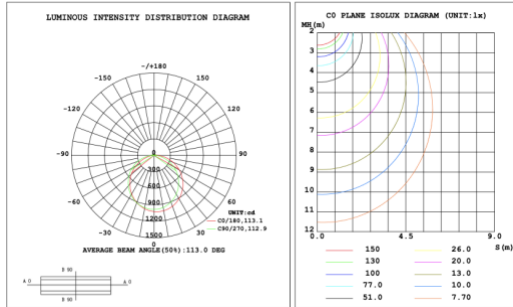




Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

### SB-D101A70WSZ 59.06" 70W @ 4000K

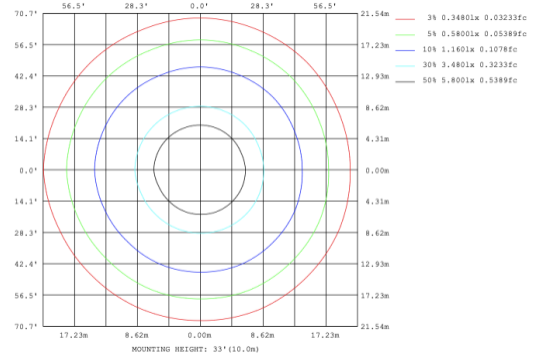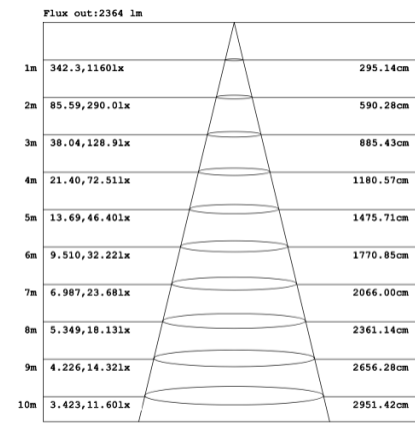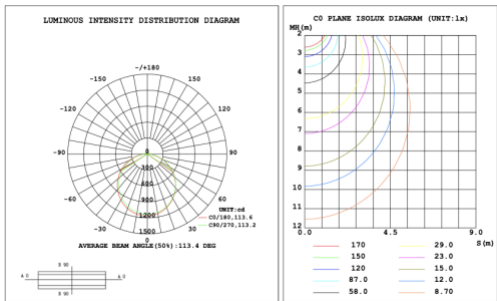

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

### SB-D101A80WSZ 70.87" 80W @ 4000K

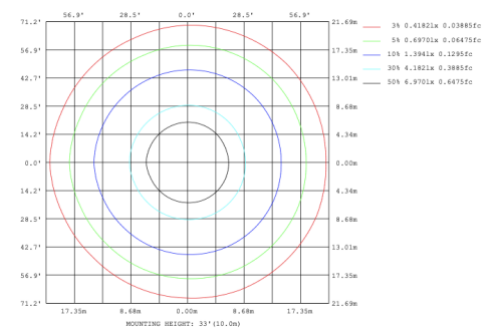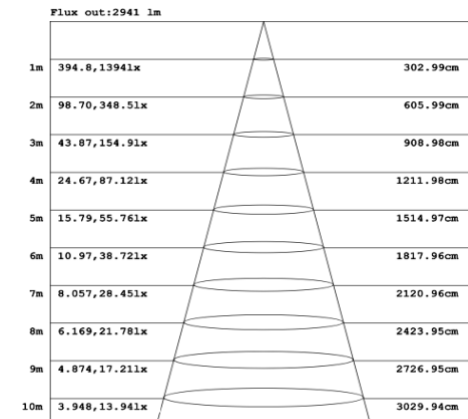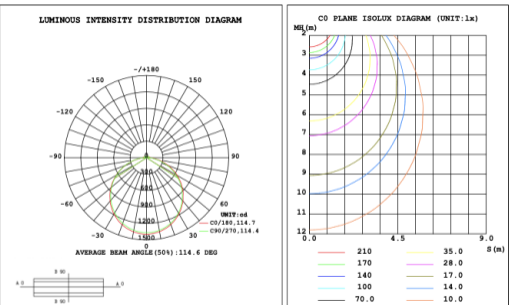

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.