


[View keystone 6 tier on website](#)

[View Video](#)

[View application photo](#)

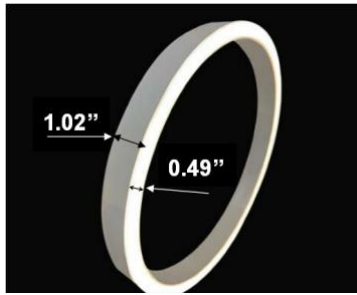

## PRODUCT DESCRIPTION

The **Keystone** circular pendants are made of extruded aluminum with a direct only component and a glare free flash lens. Sizes range from 15.57" to 70.87" and can be combined as desired to create multiple ring masterpieces. Tunable white and RGBW. Over 6500 powder coated colors, ships assembled.



SB-D106A




SB-D106B



SB-D106C



SB-D106D

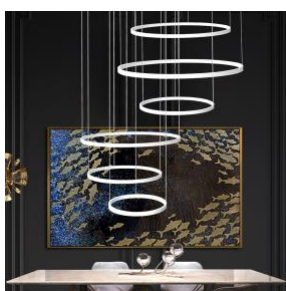

## FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination direct.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- Lens: White frosted acrylic diffuser, Glare-free
- Fixture delivered lumens per watt ratio up to 60 LPW not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.

## SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 2700K/3500K/4000K. Or 3000K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

## PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch




**MODEL INFORMATION:**

**Example: SB-D106A270WSB**

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls ( don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-D106A	*270W=59.06"+47.24"+39.37"+31.50"+23.62"+15.57"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming	*B=Black Jack	*Blank=10' foot 120" (Standard)
	280W=70.87"+59.06"+47.24"+39.37"+31.50"+23.62"		L=ELV / Triac dimming	S=Platinum Silver	5'=5 foot 60"
SB-D106B SB-D106C	320W=39.37"+47.24"+59.06"+47.24"+39.37"+23.62"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	W=Gloss White	15'=15 foot 180"
	330W=39.37"+47.24"+59.06"+47.24"+39.37"+31.50"			O=Oil Rubbed Bronze	20'=20 foot 240"
	390W=47.24"+59.06"+70.87"+59.06"+47.24"+39.37"				25'=25 foot 300"
SB-D106D	180W=23.62"+31.5"+15.75"+31.5"+23.62"+15.75"	T=3K-4K Tunable White control by remote/wall control	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.  C=Dali		30'=30 foot 360"
	210W=31.50"+47.24"+15.75"+23.62"+15.75"+39.37"				
	330W=47.24"+59.06"+39.37"+47.24"+39.37"+31.50"	R3= RGB+3000K			
	380W=59.06"+70.87"+47.24"+59.06"+47.24"+31.50"	R4=RGB+4000K			
	390W=59.06"+70.87"+47.24"+59.06"+47.24"+39.37"				
Request price for other Kelvin temp and configurations			See control options	Find page 3 and 4 for color options or select from website Color Collections	

## STANDARD COLOR FINISHES

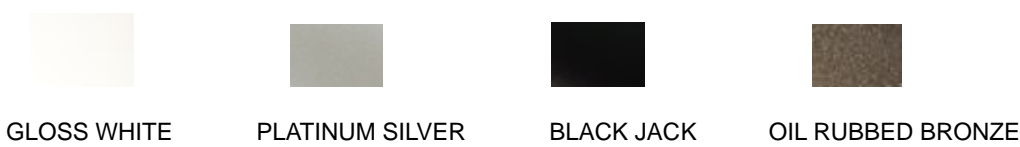


In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample, NFL football teams color or any RAL finish. Add Metallic, Sparkle, Transparent texture and originality to create a perfect custom products. Contact factory for quote


### SOLID TONE FINISH




### SHIMMER / GLITTER FINISH



### PALLEON METALLIC TEXTURE FINISH

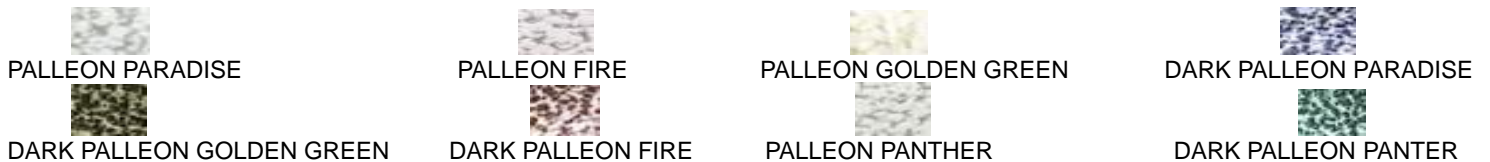

### CHROME / SPECIALTY FINISH

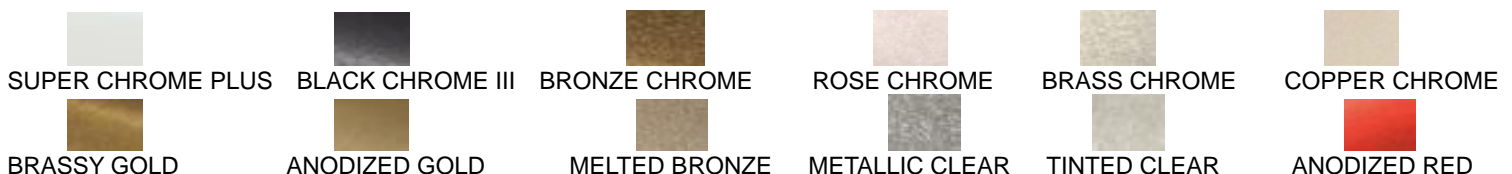

**SPARKLE FINISH**



**WETSTON WRINKLED TEXTURE FINISH**



**LUMEN OUTPUT (for color selectable not RGBW)**

Model Number	Size	Wattage	Kelvin Temp field Selectable ±500K	Delivered Lumen ±10%
SB-D106A	59.06"+47.24"+39.37"+31.50"+23.62"+15.57"	270W	2700K/3500K/4000K or 3000K/3500K/4000K	16200 lm
	70.87"+59.06"+47.24"+39.37"+31.50"+23.62"	280W	2700K/3500K/4000K or 3000K/3500K/4000K	16800 lm
SB-D106B/C	39.37"+47.24"+59.06"+47.24"+39.37"+23.62"	320W	2700K/3500K/4000K or 3000K/3500K/4000K	19200 lm
	39.37"+47.24"+59.06"+47.24"+39.37"+31.50"	330W	2700K/3500K/4000K or 3000K/3500K/4000K	19800 lm
	47.24"+59.06"+70.87"+59.06"+47.24"+39.37"	390W	2700K/3500K/4000K or 3000K/3500K/4000K	23400 lm
SB-D106D	23.62"+31.5"+15.75"+ 31.5"+23.62"+15.75"	180W	2700K/3500K/4000K or 3000K/3500K/4000K	10800 lm
	31.50"+47.24"+15.75"+23.62"+15.75"+39.37"	210W	2700K/3500K/4000K or 3000K/3500K/4000K	12600 lm
	47.24"+59.06"+39.37"+ 47.24"+39.37"+31.50"	330W	2700K/3500K/4000K or 3000K/3500K/4000K	19800 lm
	59.06"+70.87"+47.24"+59.06"+47.24"+31.50"	380W	2700K/3500K/4000K or 3000K/3500K/4000K	22800 lm
	59.06"+70.87"+47.24"+59.06"+47.24"+39.37"	390W	2700K/3500K/4000K or 3000K/3500K/4000K	23400 lm

**EMERGENCY BATTERY OPTIONS**

[SEE SPEC](#)


PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

**RGBW/TUNABLE WHITE SMART CONTROL**


[SEE SPEC AND VIDEO](#)

**DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"**


**SB-D106A Canopy mount**

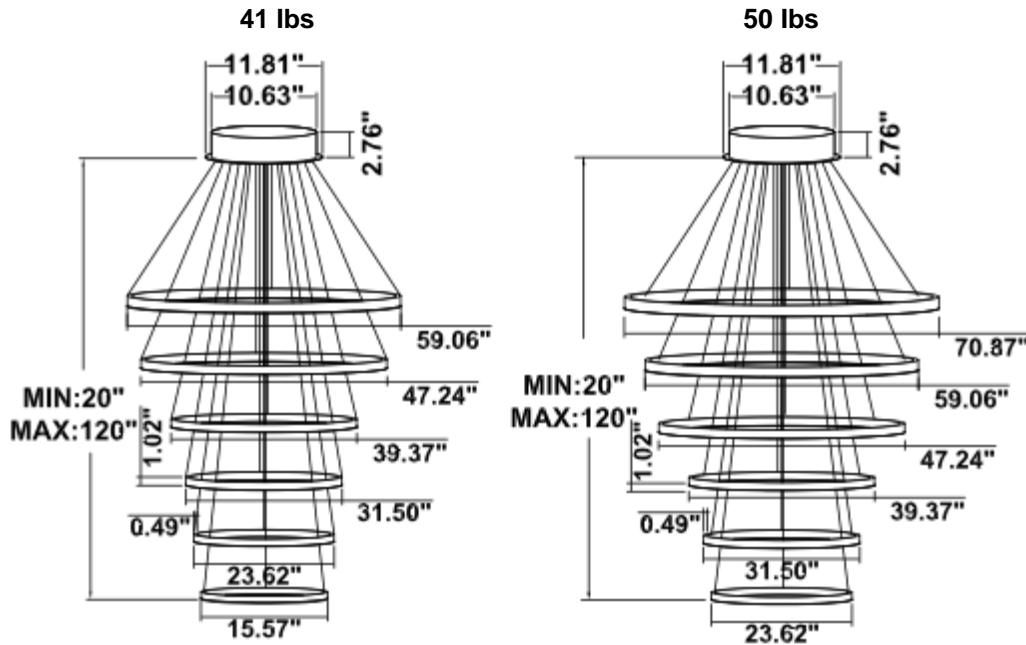


**SB-D106B Canopy mount**

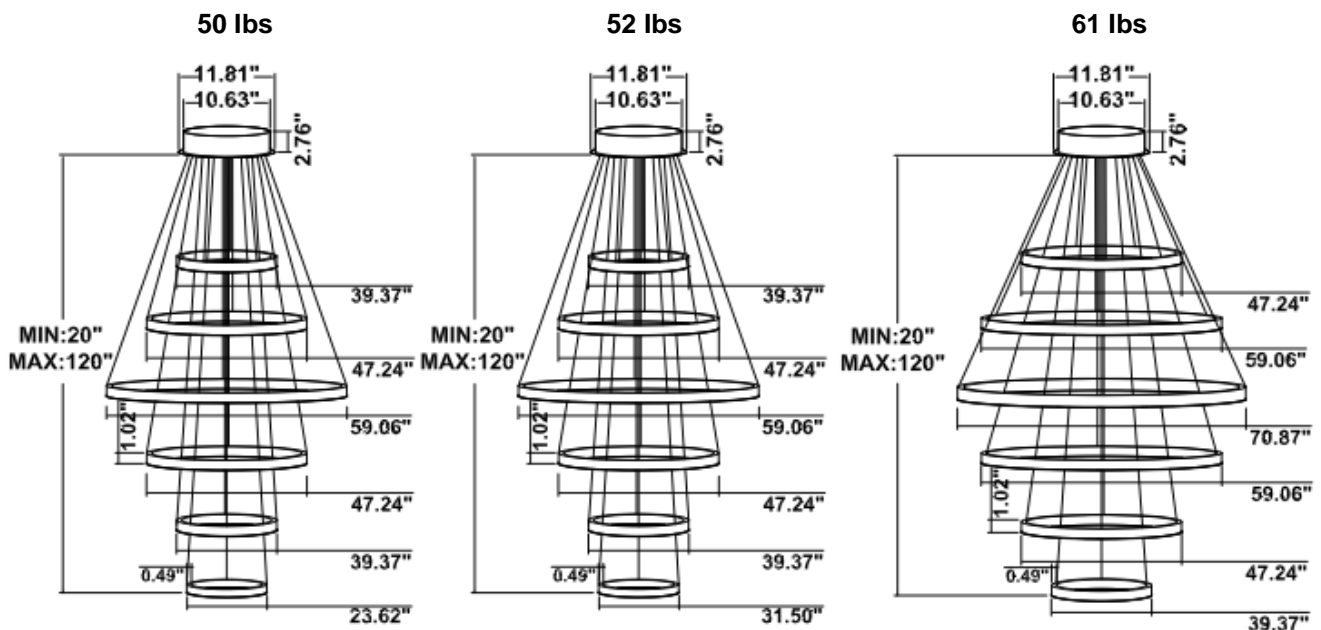


**SB-D106C Remote mount and cables fixed directly in the ceiling (Driver box size: L10.83" X W3.78" X H1.81")**

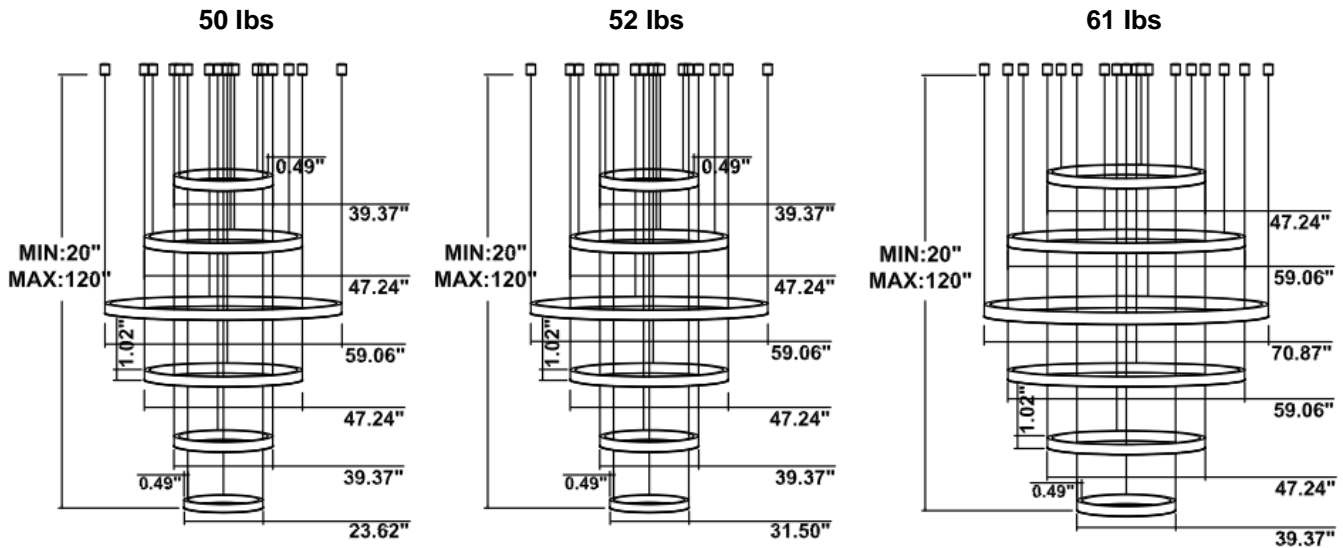

**SB-D106D Canopy mount**

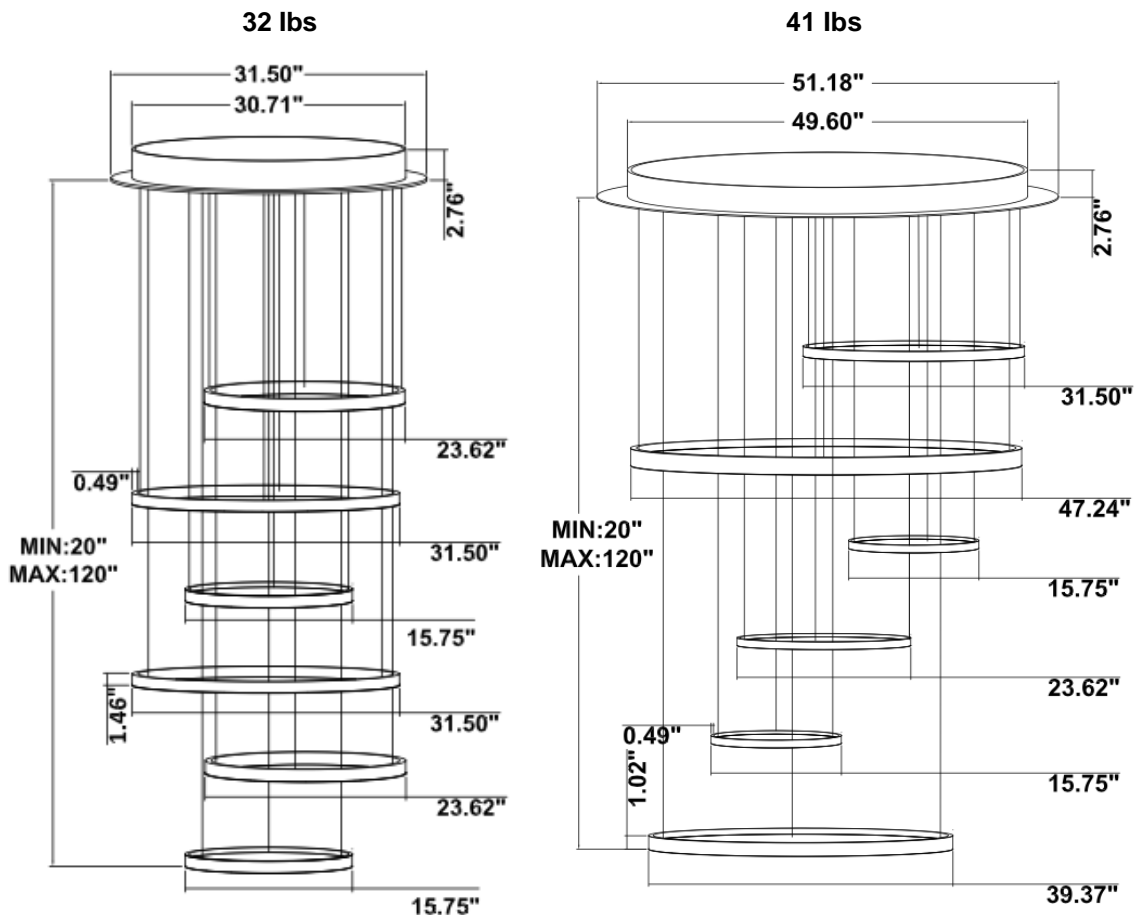


**SB-D106D Canopy mount and cables fixed directly in the ceiling**

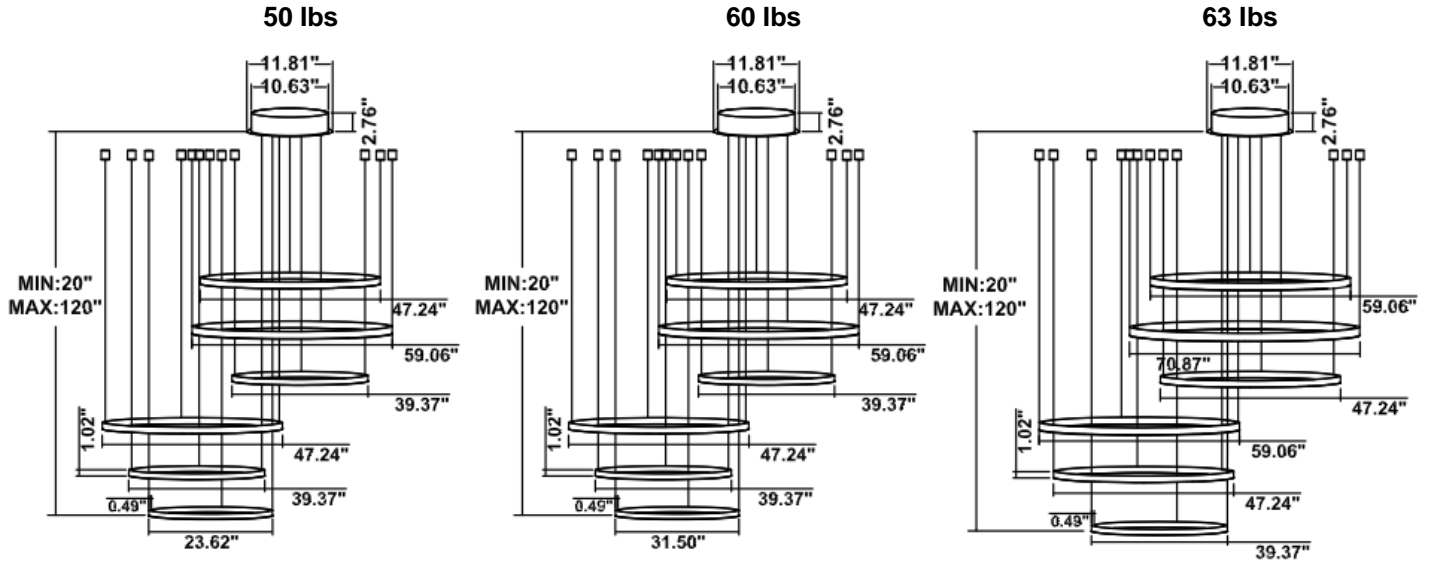


**PHOTOMETRIC: Direct Illumination (Testing for single ring only)**


**SB-D101A20WSZ 15.75\"/>**

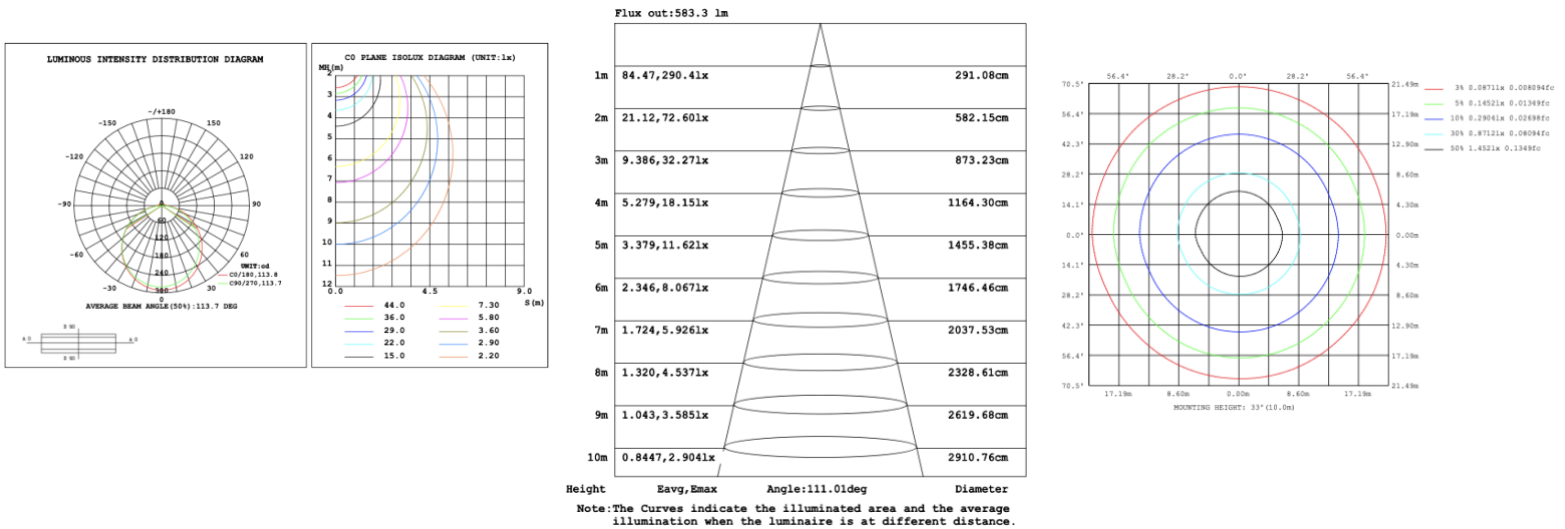


**SB-D101A30WSZ 23.62" 30W @ 4000K**

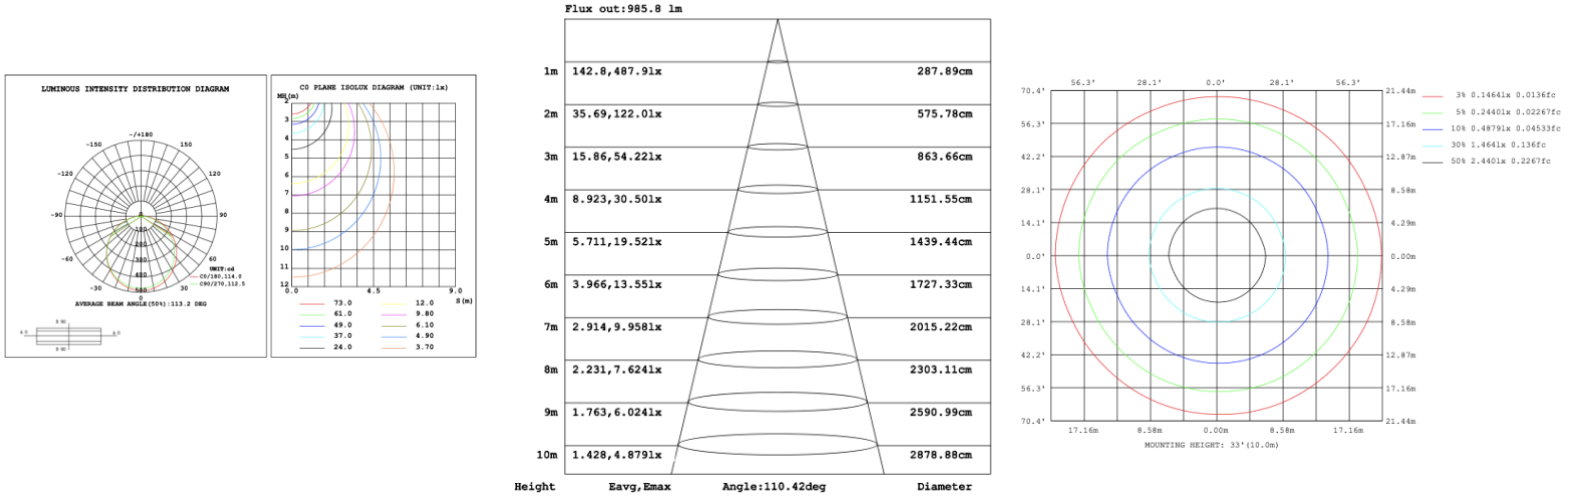

**SB-D101A40WSZ 31.50" 40W @ 4000K**

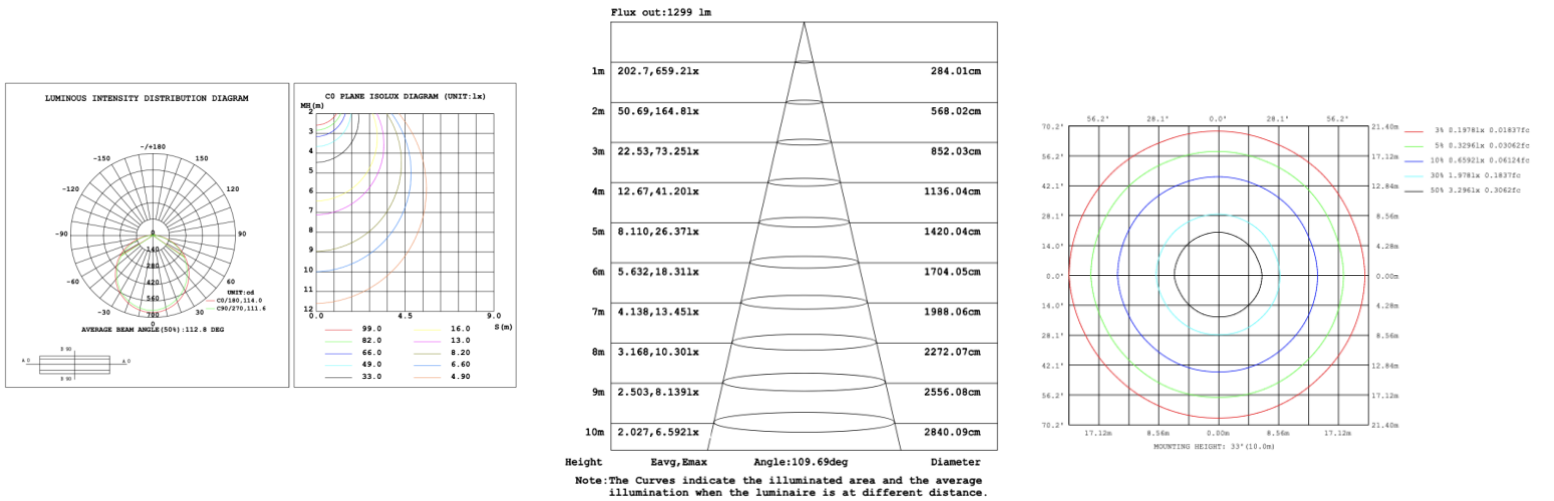


**SB-D101A50WSZ 39.37" 50W @ 4000K**

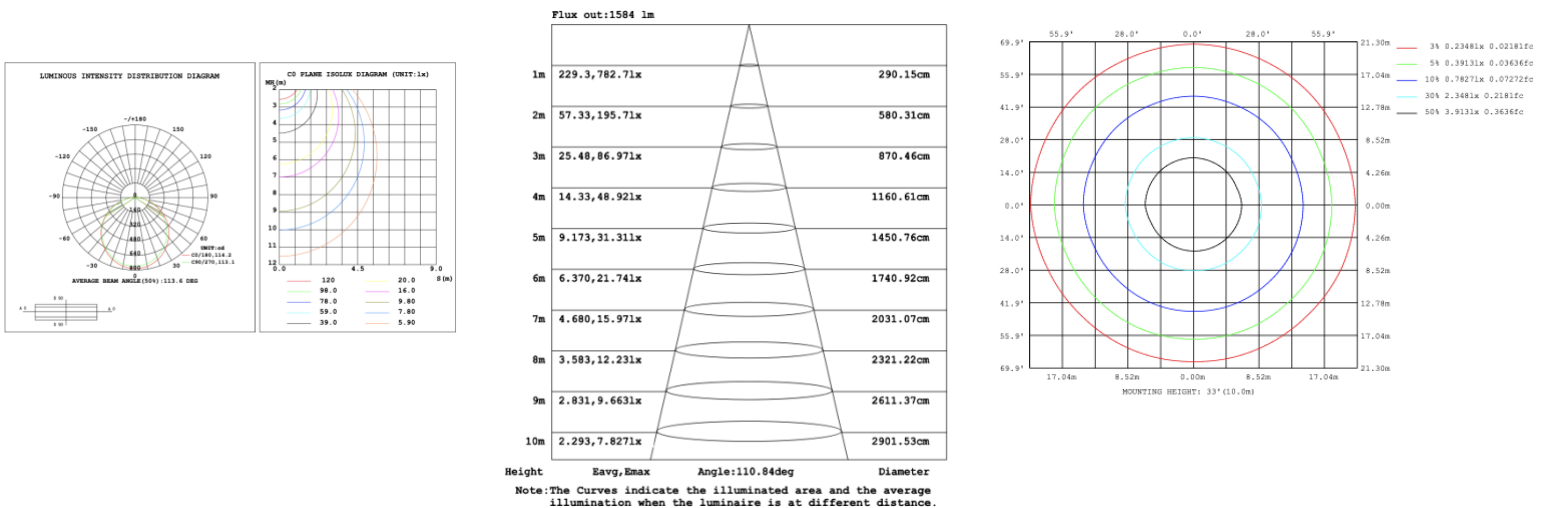




### SB-D101A60WSZ 47.24" 60W @ 4000K

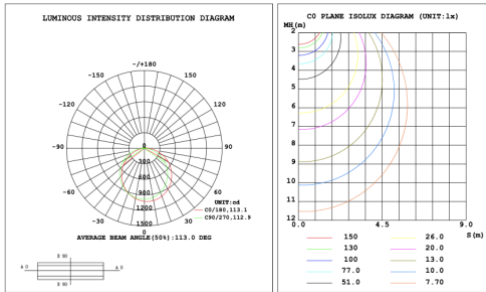


Flux out: 2047 lm

Height	Eavg, Emax	Angle: 110.12deg	Diameter
1m	296.5, 1024lx		286.29cm
2m	74.12, 256.0lx		572.57cm
3m	32.94, 113.8lx		858.86cm
4m	18.53, 64.0lx		1145.14cm
5m	11.86, 40.96lx		1431.43cm
6m	8.236, 28.45lx		1717.71cm
7m	6.051, 20.9lx		2004.00cm
8m	4.633, 16.0lx		2290.28cm
9m	3.660, 12.64lx		2576.57cm
10m	2.965, 10.24lx		2862.85cm

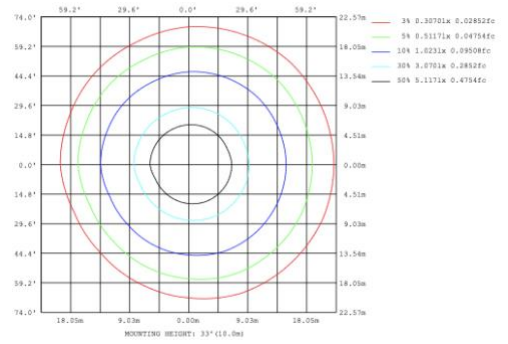


### SB-D101A70WSZ 59.06" 70W @ 4000K

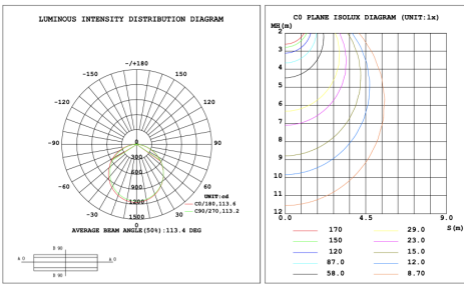


Flux out: 2364 lm

Height	Eavg, Emax	Angle: 111.75deg	Diameter
1m	342.3, 1160lx		295.14cm
2m	85.59, 290.0lx		590.28cm
3m	38.04, 128.9lx		885.43cm
4m	21.40, 72.5lx		1180.57cm
5m	13.69, 46.4lx		1475.71cm
6m	9.510, 32.2lx		1770.85cm
7m	6.987, 23.6lx		2066.00cm
8m	5.349, 18.1lx		2361.14cm
9m	4.226, 14.3lx		2656.28cm
10m	3.423, 11.6lx		2951.42cm

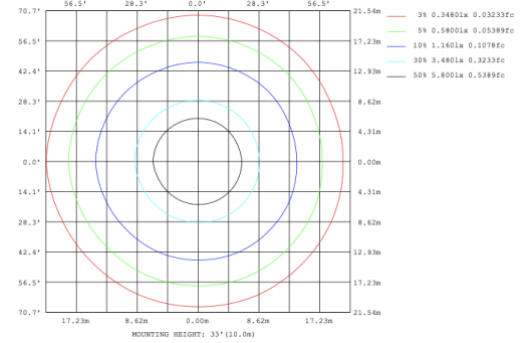

### SB-D101A80WSZ 70.87" 80W @ 4000K

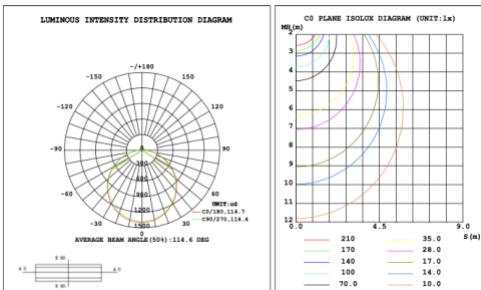

Flux out: 2941 lm

Height	Eavg, Emax	Angle: 113.14deg	Diameter
1m	394.8, 1394lx		302.99cm
2m	98.70, 348.5lx		605.99cm
3m	43.87, 154.9lx		908.98cm
4m	24.67, 87.1lx		1211.98cm
5m	15.79, 55.7lx		1514.97cm
6m	10.97, 38.7lx		1817.96cm
7m	8.057, 28.4lx		2120.96cm
8m	6.169, 21.7lx		2423.95cm
9m	4.874, 17.2lx		2726.95cm
10m	3.948, 13.9lx		3029.94cm

