



Silver Chain



Gold Chain



Rose Gold Chain

[View Sapporo 2 tier website](#)

[View Video](#)

[View application photos](#)

PRODUCT DESCRIPTION

Sapporo Custom Modern Creative Luxury Tassel Aluminum Chain LED Ceiling hanging pendant Light, not only provides ambient illumination but also serves as a stylish focal point to any room.

Sapporo is a grand, cascading pendent to make a dramatic statement. This modern pendent is designed to enhance the ambiance and style of your room, whether you're illuminating your dining room, foyer, wedding hall, hotel or living room offers the perfect blend of contemporary elegance and functional design.

FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination direct.
- Aluminum body, Aluminum chain, metal driver canopy.
- Fixture delivered lumens per watt ratio up to 60 LPW, not including RGBW.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC dimming available.
- UL listed, suitable for dry location. (BAA) Buy American Compliant.
- Gloss White, Black Jack, Platinum Silver and Oil bronze color finish as standard, 6,500 custom colors are available.
- Built in color temperature selectable. Choose from 2700K/3500K/4000K ; 3000K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- [CCT Selector Switch](#)



MODEL INFORMATION:

Example: SB-D202A70WSB

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Canopy Finishes	"Y" Chain Finishes	"X" Aircraft Cable
*SB-D202A	70W= 23.62"+31.50"	*S=3000K/3500K/4000K Color Select by internal	*Blank=1-10V dimming	*B=Black Jack	*S=Silver (standard)	*Blank=10' feet 120"(Standard
	90W= 31.50"+39.37"	CCT Color Selector, 4000K factory color default set, CRI 90	L=ELV / Triac dimming	S=Platinum Silver	R=Rose Gold (standard)	5'=5 feet 60"
	110W= 39.37"+47.24"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	W=Gloss White	G=Gold	15'=15 feet 180"
	150W = 59.06"+70.87"				O=Oil Rubbed Bronze	20'=20 feet 240"
					Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	25'=25 feet 300"
					C=Dali	
		R3= RGB+3000K				
		R4=RGB+4000K (standard)				

Request price for other finishes color for Chain, Canopy and Ring, Full Color Name or RAL number for Custom Colors, select from [Color Collections](#)

STANDARD COLOR FINISHES FOR ALUMINIUM RING AND CANOPY:




In addition to our standard colors, we offer more than 6,500 [finishes and colors](#) for your luminaire. We can match your paint sample or any RAL finish. Add texture and originality to create a perfect match.

LUMEN OUTPUT

Model Number	Size	Wattage	Kevin Temp field Selectable	Delivered Lumen
SB-D202A	23.62"+31.50"	70W	2700K/3500K/3500K 3000K/3500K/4000K	4200 lm
	31.50"+39.37"	90W	2700K/3500K/3500K 3000K/3500K/4000K	5400 lm
	39.37"+47.24"	110W	2700K/3500K/3500K 3000K/3500K/4000K	6600 lm
	59.06"+70.87"	150W	2700K/3500K/3500K 3000K/3500K/4000K	9000 lm
	23.62"+31.50"	70W	2700K/3500K/3500K 3000K/3500K/4000K	4200 lm
	31.50"+39.37"	90W	2700K/3500K/3500K 3000K/3500K/4000K	5400 lm

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes


RGBW/TUNABLE WHITE SMART CONTROL

[SEE SPEC AND VIDEO](#)

Get Smart



Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"

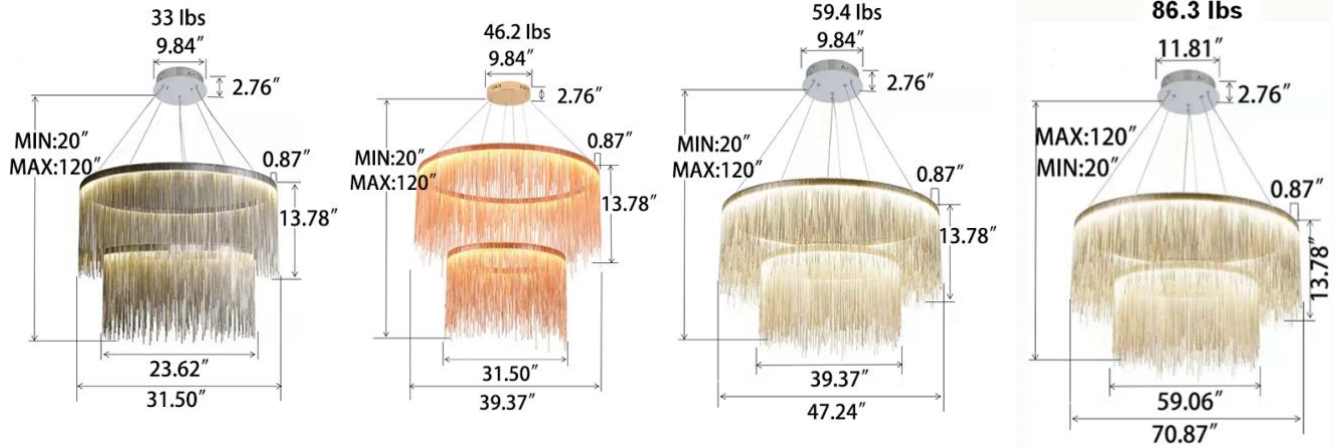


PHOTOMETRIC: Testing for 1 Tier and Direct Illumination

23.62" 30W @ 4000K


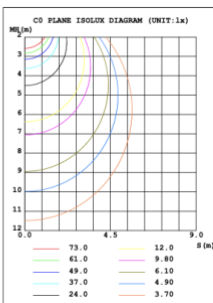
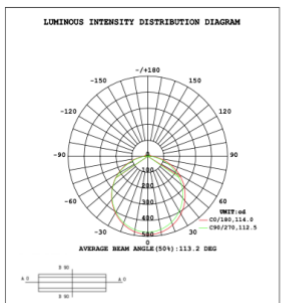


Flux out: 985.8 lm

Height	Eavg, Emax	Angle: 110.42deg	Diameter
1m	142.8, 487.91lx		287.89cm
2m	35.69, 122.01lx		575.78cm
3m	15.86, 54.221lx		863.66cm
4m	8.923, 30.501lx		1151.55cm
5m	5.711, 19.521lx		1439.44cm
6m	3.966, 13.551lx		1727.33cm
7m	2.914, 9.958lx		2015.22cm
8m	2.231, 7.624lx		2303.11cm
9m	1.763, 6.024lx		2590.99cm
10m	1.428, 4.879lx		2878.88cm



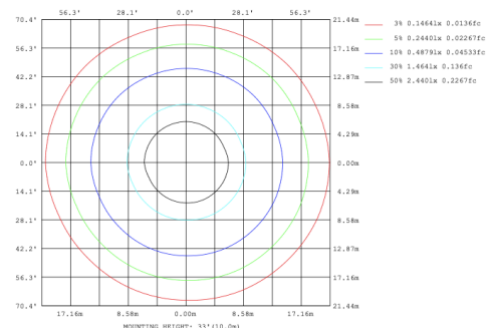


31.50" 40W @ 4000K

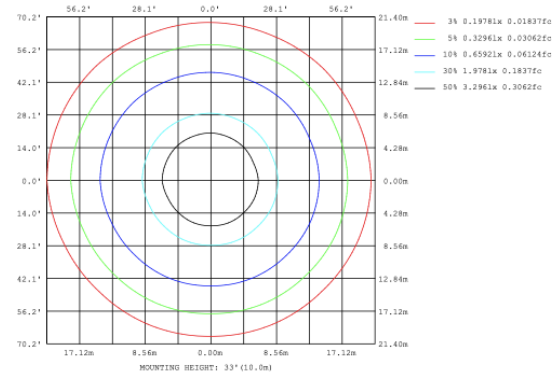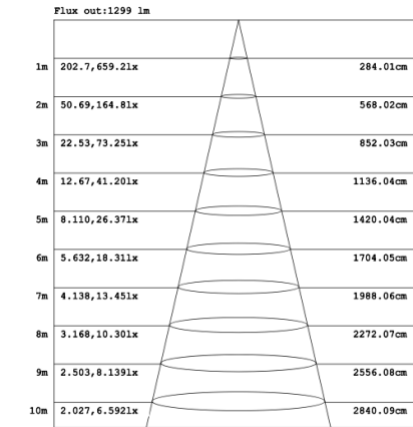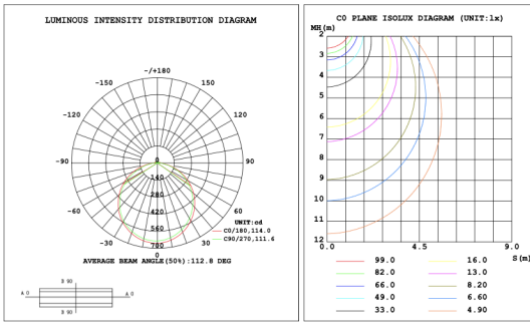




Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

39.37" 50W @ 4000K

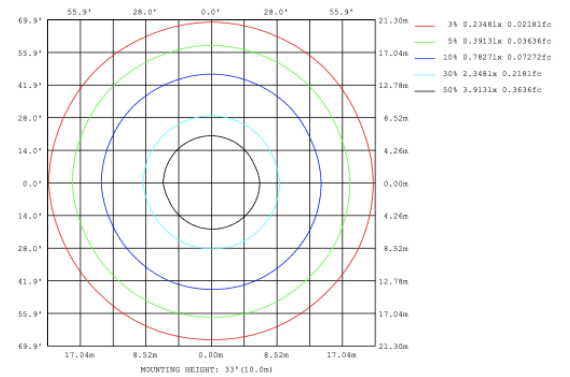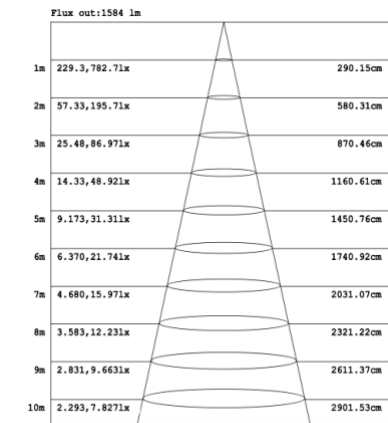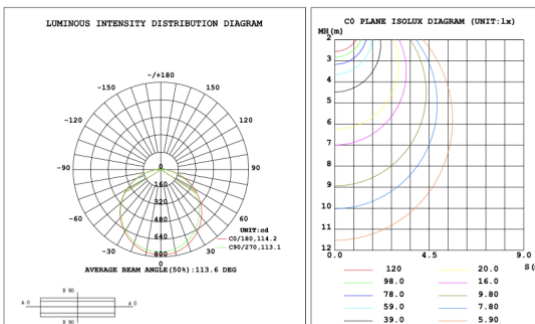

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

59.06" 70W @ 4000K

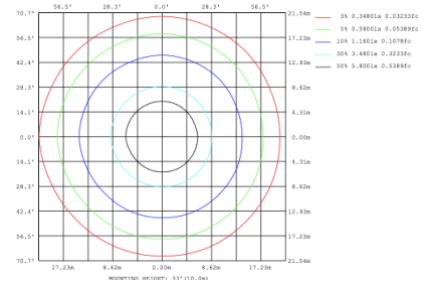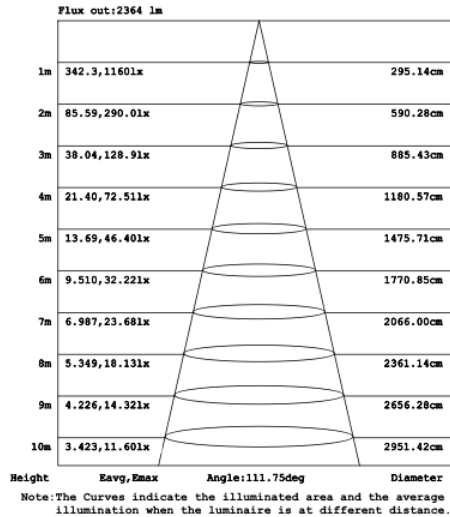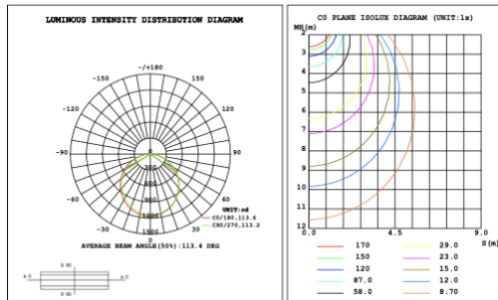

70.87" 80W @ 4000K

