

[View Apache on website](#)

[View Video](#)

[View application photos](#)

Apache

PRODUCT DESCRIPTION

Introducing the Apache Surface Mounted Rings: a fusion of contemporary sophistication and practicality. Crafted from extruded aluminum with a unique direct-only component and a glare-free acrylic ring. With sizes ranging from 18.11" to 61.38", Explore customizable ambiance with tunable white and RGBW options, offering over 6500 powder-coated colors. Shipped assembled for convenience.

FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination direct.
- Size from 18.11" up to 61.38".
- White frosted acrylic diffuser, Glare-free lens.
- Fixture delivered lumens per watt ratio up to 80 LPW not including RGBW.
- Driver concealed within the canopy, can be mounted on wall or sloped ceiling .

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC, Dali, DMX, ZigBee available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch







MODEL INFORMATION:

Example: SB-V01A20WSB

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	
*SB-V01A	*20W=15.75"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming	*B=Black Jack	
	30W=23.62"		C=Dali		
	40W=31.50		L=ELV / Triac dimming	S=Platinum Silver	
SB-V02A	50W=15.75"+23.62"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	W=Gloss White	
	60W=23.62"+31.50"				
SB-V02B	50W=15.75"+23.62"				
	60W=23.62"+31.50"				
SB-V03A	90W=15.75"+23.62"+31.50"		T=3K-4K Tunable White control by remote/wall control	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	Find page 3 for color options or select from website Color Collections
SB-V03B	90W=15.75"+23.62"+31.50"				
SB-V04A	100W=15.75"+15.75"+23.62"+23.62" 140W=23.62"+23.62"+31.50"+31.50"				
SB-V05A	140W=15.75"+15.75"+23.62"+23.62"+31.50"	R3= RGB+3000K	See control options		
SB-V06A	150W=15.75"+15.75"+15.75"+23.62"+23.62"+23.62"	R4=RGB+4000K			
	210W=23.62"+23.62"+23.62"+31.50"+31.50"+31.50"				
<p>Please request specialty pricing for alternative Kelvin temperatures, additional sizes, customizable configurations, specialty color finishes, and available controls.</p>					

STANDARD COLOR FINISHES



Discover beyond our standard hues with over 6,500 [finishes and colors](#) available for your luminaire, including precise color matching, NFL team colors, and custom RAL finishes. Elevate your design with metallic, sparkle, or transparent textures for a touch of individuality. Explore our most popular selections below and contact our factory for personalized quotes.

You can request color swatches by emailing us at customerservice@snowball-inc.com

Please note: Colors may appear differently due to screen display settings.



SOLID TONE FINISH

PMB-4364 Pearl White	PMB-0593 Soft White	PSB-8051 Dirty White	PMB-0513 Silver Metallic II	PMB-6525 BMW Silver	HSS-1336 Silk Satin Black
PSS-0106 Ink Black	USS-2603 Gloss Black	UMB-0336 Metallic Bronze	UMB-0493 US Bronze	EMS-0940 Spanish Gold	PMB-0808 Performance Gold
PSS-4971 Very Red	PSS-2876 Orange Glow	PSS-1791 JuJu Orange	PSS-0118 Spring Yellow	PSB-5945 Bright Green	PMB-10657 Yama Blue
PPB-2846 Purple Glaze	PSS-1670 Rosette Pink	PSS-4008 Jewel Grey	PSS-4500 Crest Grey	PSS-4647 Beach Tan	PMB-5478 Montana Gold

SHIMMER/ GLITTER FINISH

PMB-5567 Champagne Shimmer	UMB-2062 Shimmer Gold	PMS-5677 Shimmer Copper	PMB-6611 Shimmer Black	PPB-8167 Trans Glitter Gold	PMB-6762 Alloy Glitter
--------------------------------------	---------------------------------	-----------------------------------	----------------------------------	---------------------------------------	----------------------------------

PALLEON METALLIC TEXTURED FINISH

PVB-10274 Palleon Paradise	PVB-10272 Palleon Fire	PVB-10271 Palleon Golden Green	PVB-10268 Dark Palleon Paradise	PVB-10267 Dark Palleon Golden Green	PVB-10268 Dark Palleon Fire
PVB-10273 Palleon Panther	PVB-10269 Dark Palleon Panther				

CHROME/SPECIALTY FINISH

UMS-10671 Super Chrome Plus	PPB-6677 Black Chrome III	PMB-4124 Bronze Chrome	UMB-10813 Rose Chrome	UMB-10815 Brass Chrome	UMB-10816 Copper Chrome
PSS-6530 Brassy Gold	PPB-2262 Anodized Gold	PPB-8034 Melted Bronze	PPB-6325 Metallic Clear	PPB-5633 Tinted Clear	PPB-5936 Anodized Red

SPARKLE FINISH

PPB-4694 Super Red Sparkle	PPB-4727 Silver Sparkle	PPB-5835 Rockstar Sparkle	PMB-4130 Pearl Sparkle	PPB-5004 Ultra Blue Sparkle	PPB-5078 Magnum Blue Sparkle
PMB-2750 Dark Grey Sparkle	PMB-6769 Deep Blue Sparkle	PPB-4499 Gold Sparkle	PMB-4417 Baby Blue Sparkle		

WETSTONE WRINKLED TEXTURE FINISH


PWB-2232 Wetstone Black	PWB-9157 Wetstone Gold Bronze	PWB-9156 Wetstone Copper	PWB-2343 Wetstone Rock Bronze	PWB-2590 Wetstone Emerald II
-----------------------------------	---	------------------------------------	---	--

LUMEN OUTPUT

Model Number	Size	Wattage ±10%	Kelvin Temp field Selectable ± 500K	Delivered Lumen ±10%
SB-V01A	15.75"	20W	3000K/3500K/4000K or 2700K/3500K/4000K	1600 lm
	23.62"	30W	3000K/3500K/4000K or 2700K/3500K/4000K	2400 lm
	31.50"	40W	3000K/3500K/4000K or 2700K/3500K/4000K	3200 lm
SB-V02A	15.75"+23.62"	50W	3000K/3500K/4000K or 2700K/3500K/4000K	4000 lm
	23.62"+31.50"	60W	3000K/3500K/4000K or 2700K/3500K/4000K	4800 lm
SB-V02B	15.75"+23.62"	50W	3000K/3500K/4000K or 2700K/3500K/4000K	4000 lm
	23.62"+31.50"	60W	3000K/3500K/4000K or 2700K/3500K/4000K	4800 lm
SB-V03A	15.75"+23.62"+31.50"	90W	3000K/3500K/4000K or 2700K/3500K/4000K	7200 lm
SB-V03B	15.75"+23.62"+31.50"	90W	3000K/3500K/4000K or 2700K/3500K/4000K	7200 lm
SB-V04A	15.75"+15.75"+23.62"+23.62"	100W	3000K/3500K/4000K or 2700K/3500K/4000K	8000 lm
	23.62"+23.62"+31.50"+31.50"	140W	3000K/3500K/4000K or 2700K/3500K/4000K	11200 lm
SB-V05A	15.75"+15.75"+23.62"+23.62"+31.50"	140W	3000K/3500K/4000K or 2700K/3500K/4000K	11200 lm
SB-V06A	15.75"+15.75"+15.75"+23.62"+23.62"+23.62"	150W	3000K/3500K/4000K or 2700K/3500K/4000K	12000 lm
	23.62"+23.62"+23.62"+31.50"+31.50"+31.50"	210W	3000K/3500K/4000K or 2700K/3500K/4000K	16800 lm

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

Get Smart


Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"

SB-V01A Canopy mount with direct lighting.

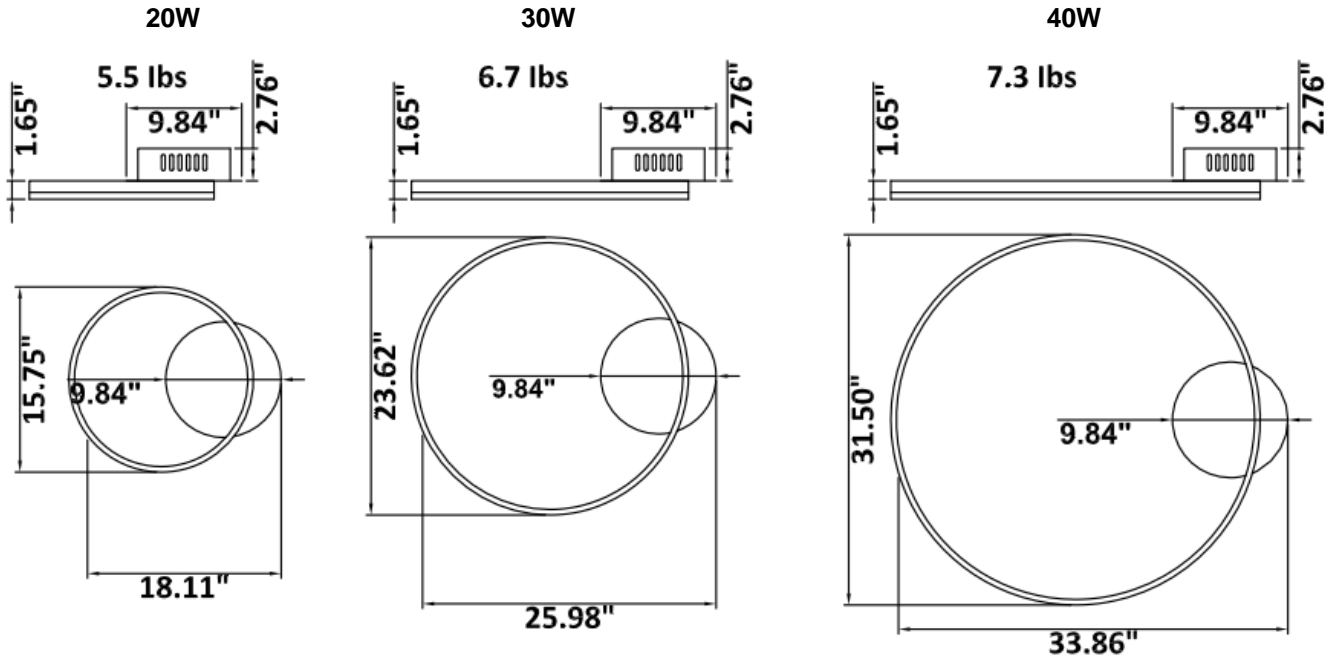


SB-V02A Canopy mount with direct lighting.



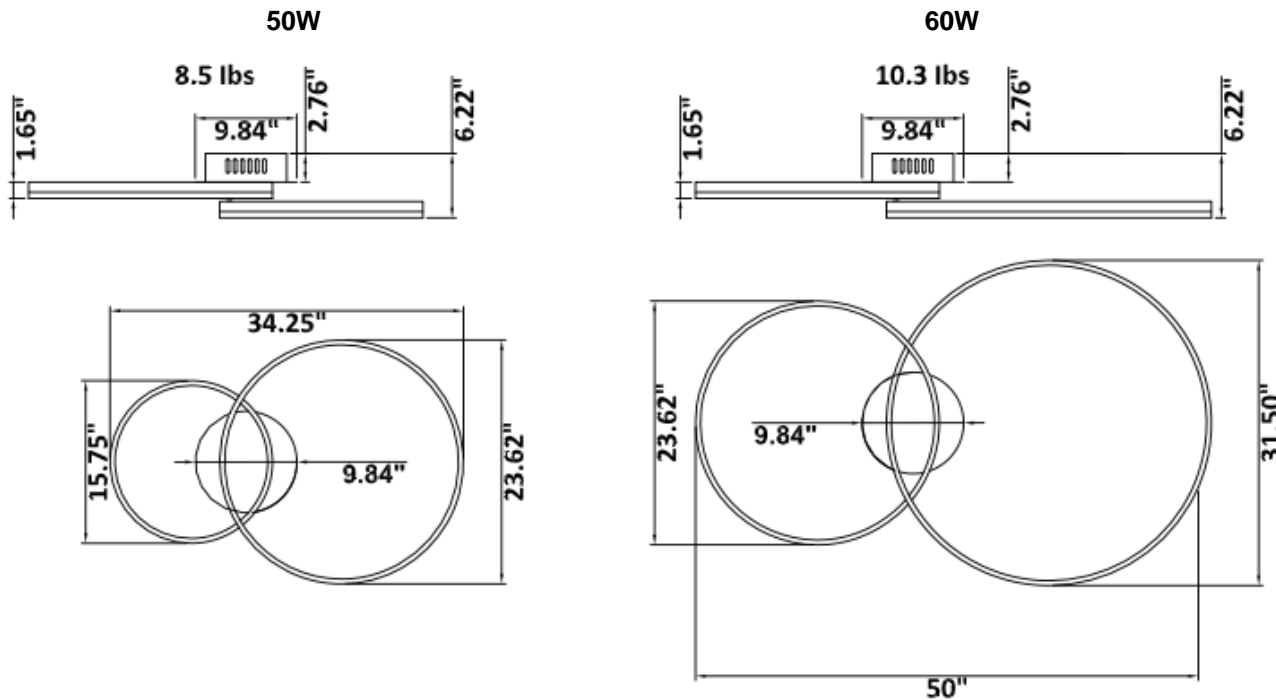


SB-V02B Canopy mount with direct lighting.

50W

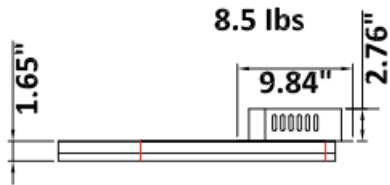


60W

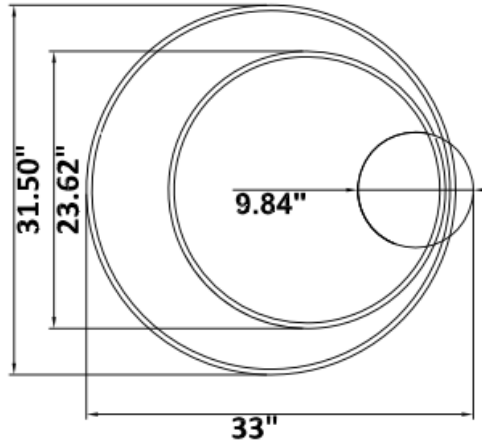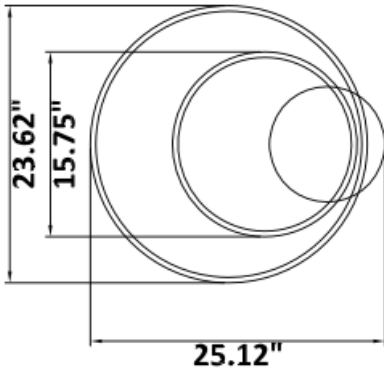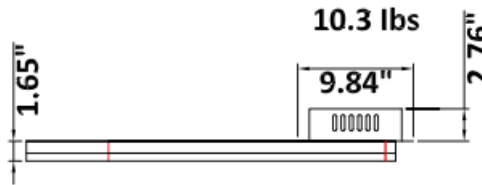




SB-V03A Canopy mount with direct lighting.

SB-V03B Canopy mount with direct lighting.

90W
12.1 lbs

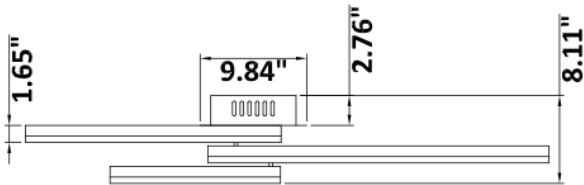


90W

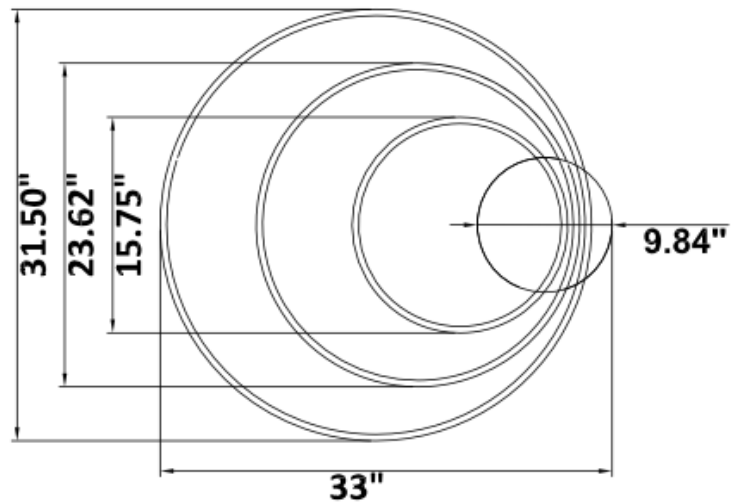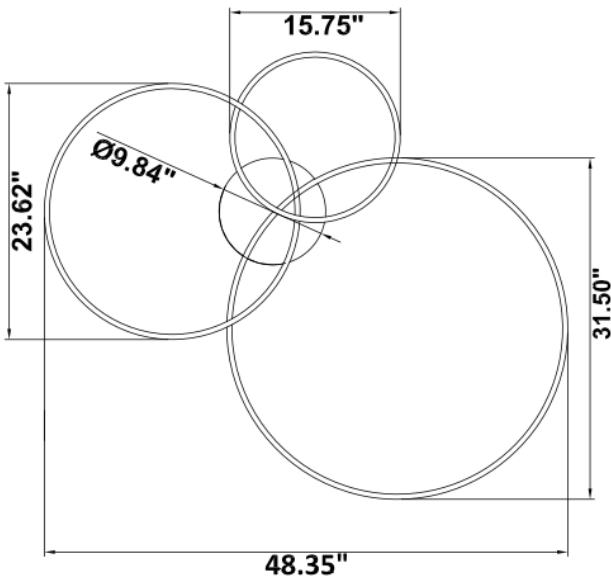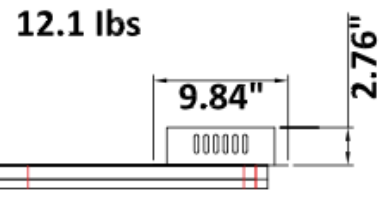


SB-V04A Canopy mount with direct lighting.

100W

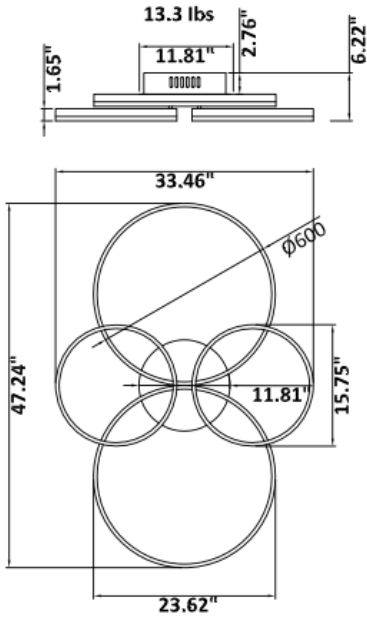


140W

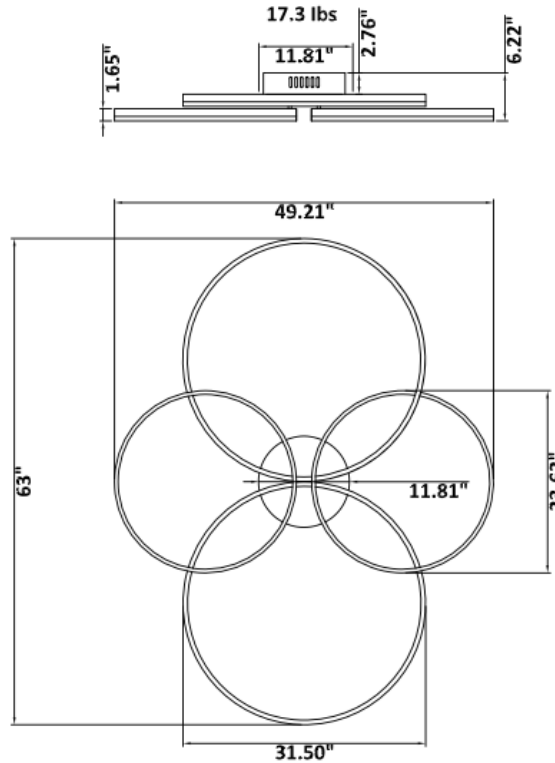

SB-V05A

Canopy mount with direct lighting.


140W

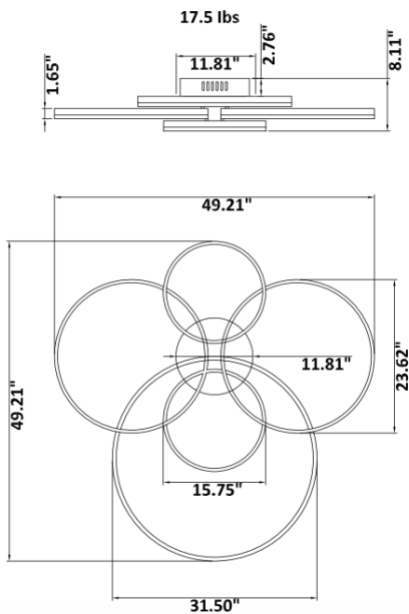


SB-V06A

Canopy mount with direct lighting.

150W

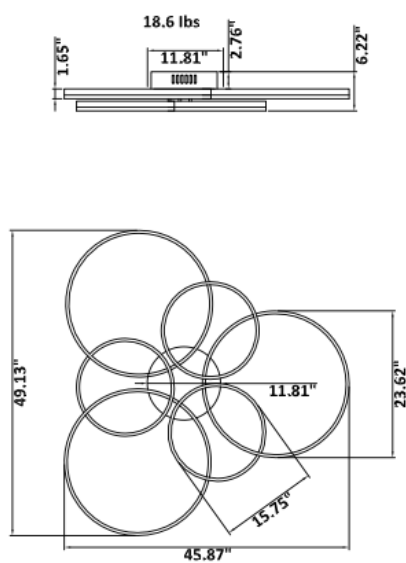


210W

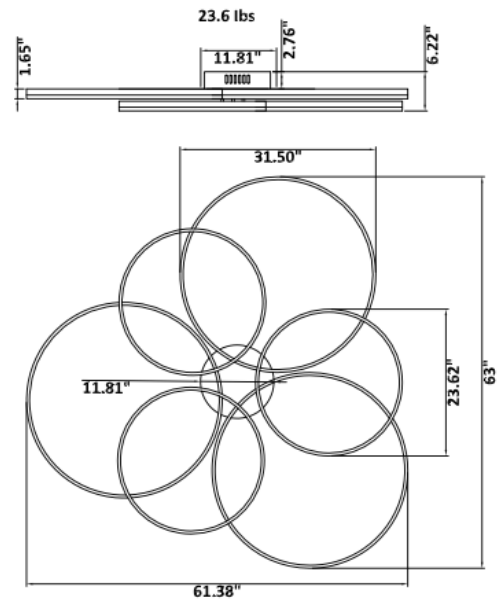

PHOTOMETRIC: Single ring test report


15.75" 20W @ 4000K

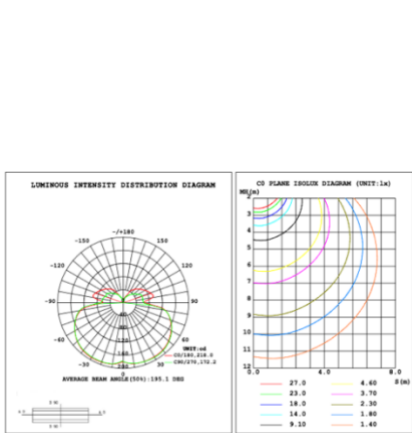


Flux out: 966.3 lm

Height	Eavg, Emax	Angle: 171.68deg	Diameter
1m	1.504, 183.11lx		2749.76cm
2m	0.3760, 45.78lx		5499.52cm
3m	0.1671, 20.35lx		8249.28cm
4m	0.0940, 11.45lx		10999.04cm
5m	0.0602, 7.325lx		13748.80cm
6m	0.0418, 5.087lx		16498.56cm
7m	0.0307, 3.737lx		19248.32cm
8m	0.0235, 2.861lx		21998.08cm
9m	0.0186, 2.261lx		24747.84cm
10m	0.0150, 1.831lx		27497.60cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

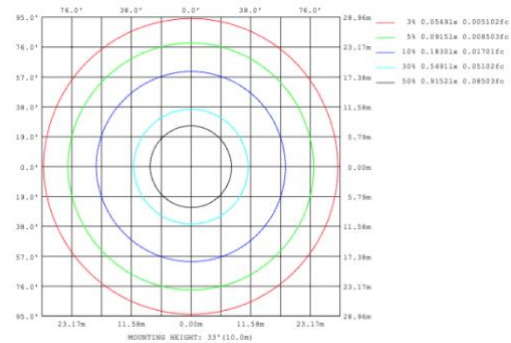


23.62" 30W @ 4000K

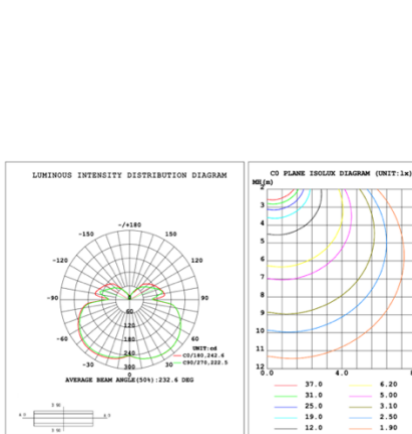


Flux out: 1475 lm

Height	Eavg, Emax	Angle: 176.03deg	Diameter
1m	0.1430, 248.3lx		5770.56cm
2m	0.0358, 62.08lx		11541.13cm
3m	0.0159, 27.59lx		17311.69cm
4m	0.0089, 15.52lx		23082.25cm
5m	0.0057, 9.933lx		28852.81cm
6m	0.0040, 6.898lx		34623.38cm
7m	0.0029, 5.068lx		40393.94cm
8m	0.0022, 3.880lx		46164.50cm
9m	0.0018, 3.066lx		51935.07cm
10m	0.0014, 2.483lx		57705.63cm

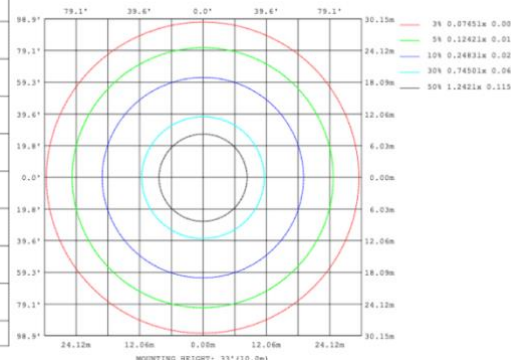

31.50" 40W @ 4000K

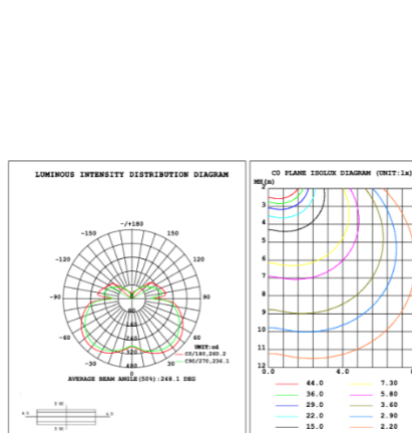

Flux out: 1906 lm

Height	Eavg, Emax	Angle: 178.35deg	Diameter
1m	0.0000, 291.01lx		13888.98cm
2m	0.0000, 72.75lx		27777.95cm
3m	0.0000, 32.33lx		41666.93cm
4m	0.0000, 18.19lx		55555.91cm
5m	0.0000, 11.64lx		69444.89cm
6m	0.0000, 8.083lx		83333.86cm
7m	0.0000, 5.938lx		97222.84cm
8m	0.0000, 4.547lx		111111.82cm
9m	0.0000, 3.592lx		125000.80cm
10m	0.0000, 2.910lx		138889.77cm

