

[View Aspen 2 tier on website](#)

[View Video](#)

[View application photos](#)

Aspen 2 Tier

PRODUCT DESCRIPTION

Introducing the Aspen Circular Pendants, crafted from extruded aluminum with glare-free acrylic rings, offering direct and indirect lighting. Available in sizes from 15.75" to 70.87", mix and match for stunning compositions. With tunable white and RGBW options, and over 6500 powder-coated colors, customize your ambiance effortlessly. Shipped assembled for convenience.

FEATURES



- 5-year limited warranty.
- Ships assembled.
- Illumination direct/indirect.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- White frosted acrylic diffuser, Glare-free lens
- Fixture delivered lumens per watt ratio up to 120 LPW, 60 LPW direct, 60 LPW indirect, not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.
- Can be remote driver mounted or driver concealed within the canopy, can be mounted on sloped ceiling.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC Dali, DMX, ZigBee available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K ; Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch




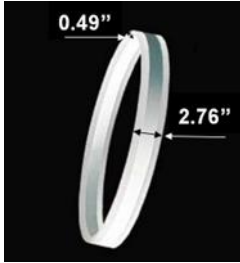


MODEL INFORMATION:

Example: SB-U02A50WSB

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-U02A SB-U02B SB-U02C SB-U02D SB-U02E SB-U02F	*50W=23.62"+15.75"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K	*Blank=1-10V dimming (default)	*B=Black Jack	*Blank=10' foot 120" (default) 5'=5 foot 60"
	90W=39.37"+31.50"	factory color default set, CRI 90	C=Dali	S=Platinum Silver	15'=15 foot 180"
	110W=47.24"+39.37"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	W=Gloss White	20'=20 foot 240"
					25'=25 foot 300"
	130W=59.06"+47.24"	T=3K-4K Tunable White control by remote/wall control	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	O=Oil Rubbed Bronze	30'=30 foot 360"
	150W=70.87"+59.06"	R3= RGB+3000K	L=ELV / Triac dimming	Find page 3 for custom color options or select from website Color Collections	
R4=RGB+4000K					
Please request specialty pricing for alternative Kelvin temperatures, additional sizes, customizable configurations, specialty color finishes, variations in aircraft cable length, and available controls.			See control options		

STANDARD COLOR FINISHES



Discover beyond our standard hues with over 6,500 [finishes and colors](#) available for your luminaire, including precise color matching, NFL team colors, and custom RAL finishes. Elevate your design with metallic, sparkle, or transparent textures for a touch of individuality. Explore our most popular selections below and contact our factory for personalized quotes.

You can request color swatches by emailing us at customerservice@snowball-inc.com

Please note: Colors may appear differently due to screen display settings.



SOLID TONE FINISH

PMB-4364 Pearl White	PMB-0593 Soft White	PSB-8051 Dirty White	PMB-0513 Silver Metallic II	PMB-6525 BMW Silver	HSS-1336 Silk Satin Black
PPS-0106 Ink Black	USS-2603 Gloss Black	UMB-0336 Metallic Bronze	UMB-0493 US Bronze	EMS-0940 Spanish Gold	PMB-0808 Performance Gold
PSS-4971 Very Red	PSS-2876 Orange Glow	PSS-1791 JuJu Orange	PSS-0118 Spring Yellow	PSB-5945 Bright Green	PMB-10657 Yama Blue
PPB-2846 Purple Glaze	PSS-1670 Rosette Pink	PSS-4008 Jewel Grey	PSS-4500 Crest Grey	PSS-4647 Beach Tan	PMB-5478 Montana Gold

SHIMMER/ GLITTER FINISH

PMB-5567 Champagne Shimmer	UMB-2062 Shimmer Gold	PMS-5677 Shimmer Copper	PMB-6611 Shimmer Black	PPB-8167 Trans Glitter Gold	PMB-6762 Alloy Glitter
--------------------------------------	---------------------------------	-----------------------------------	----------------------------------	---------------------------------------	----------------------------------

PALLEON METALLIC TEXTURED FINISH

PVB-10274 Palleon Paradise	PVB-10272 Palleon Fire	PVB-10271 Palleon Golden Green	PVB-10268 Dark Palleon Paradise	PVB-10267 Dark Palleon Golden Green	PVB-10268 Dark Palleon Fire
PVB-10273 Palleon Panther	PVB-10269 Dark Palleon Panther				

CHROME/SPECIALTY FINISH

UMS-10671 Super Chrome Plus	PPB-6677 Black Chrome III	PMB-4124 Bronze Chrome	UMB-10813 Rose Chrome	UMB-10815 Brass Chrome	UMB-10816 Copper Chrome
PPS-6530 Brassy Gold	PPB-2262 Anodized Gold	PPB-8034 Melted Bronze	PPB-6325 Metallic Clear	PPB-5633 Tinted Clear	PPB-5936 Anodized Red

SPARKLE FINISH

PPB-4694 Super Red Sparkle	PPB-4727 Silver Sparkle	PPB-5835 Rockstar Sparkle	PMB-4130 Pearl Sparkle	PPB-5004 Ultra Blue Sparkle	PPB-5078 Magnum Blue Sparkle
PMB-2750 Dark Grey Sparkle	PMB-6769 Deep Blue Sparkle	PPB-4499 Gold Sparkle	PMB-4417 Baby Blue Sparkle		

WETSTONE WRINKLED TEXTURE FINISH


PWB-2232 Wetstone Black	PWB-9157 Wetstone Gold Bronze	PWB-9156 Wetstone Copper	PWB-2343 Wetstone Rock Bronze	PWB-2590 Wetstone Emerald II
-----------------------------------	---	------------------------------------	---	--

LUMEN OUTPUT (for color selectable not RGBW)

Model Number	Size	Wattage	Kelvin Temp field Selectable $\pm 500K$	Delivered Lumen $\pm 10\%$
SB-U02A/B/C/D/E/F	23.62"+15.75"	50W	2700K/3500K/4000K or 3000K/3500K/4000K	6000 lm
	39.37"+31.50"	90W	2700K/3500K/4000K or 3000K/3500K/4000K	10800 lm
	47.24"+39.37"	110W	2700K/3500K/4000K or 3000K/3500K/4000K	13200 lm
	59.06"+47.24"	130W	2700K/3500K/4000K or 3000K/3500K/4000K	15600 lm
	70.87"+59.06"	150W	2700K/3500K/4000K or 3000K/3500K/4000K	18000 lm

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

Get Smart


Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"


SB-U02A Canopy mount with direct and indirect lighting.

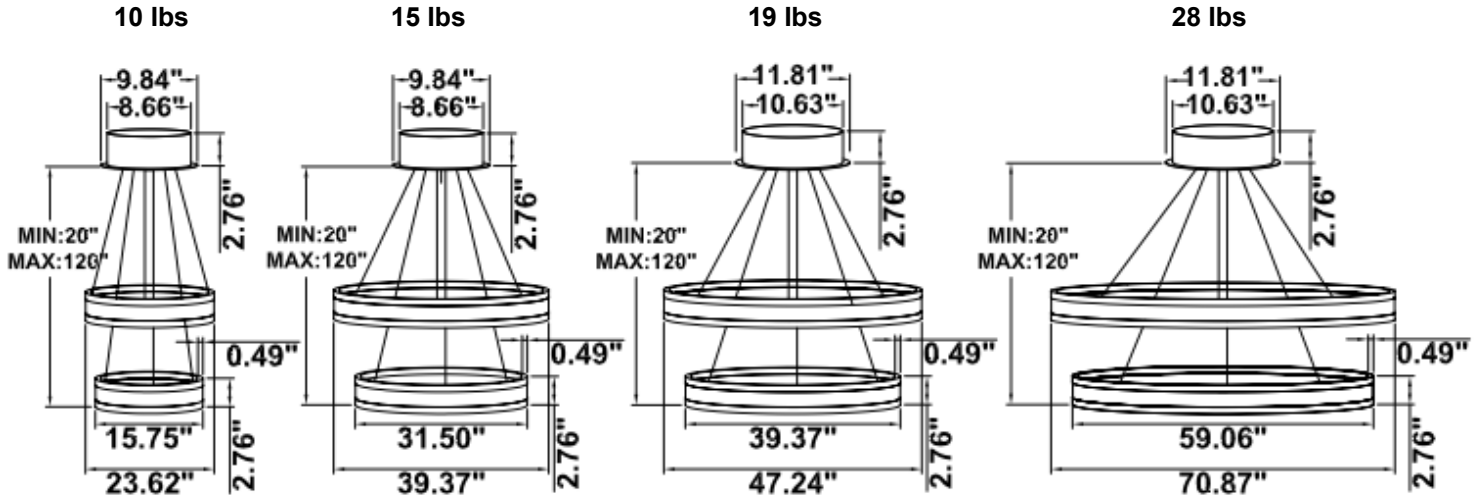


SB-U02B Canopy mount with accent ring, direct and indirect lighting.

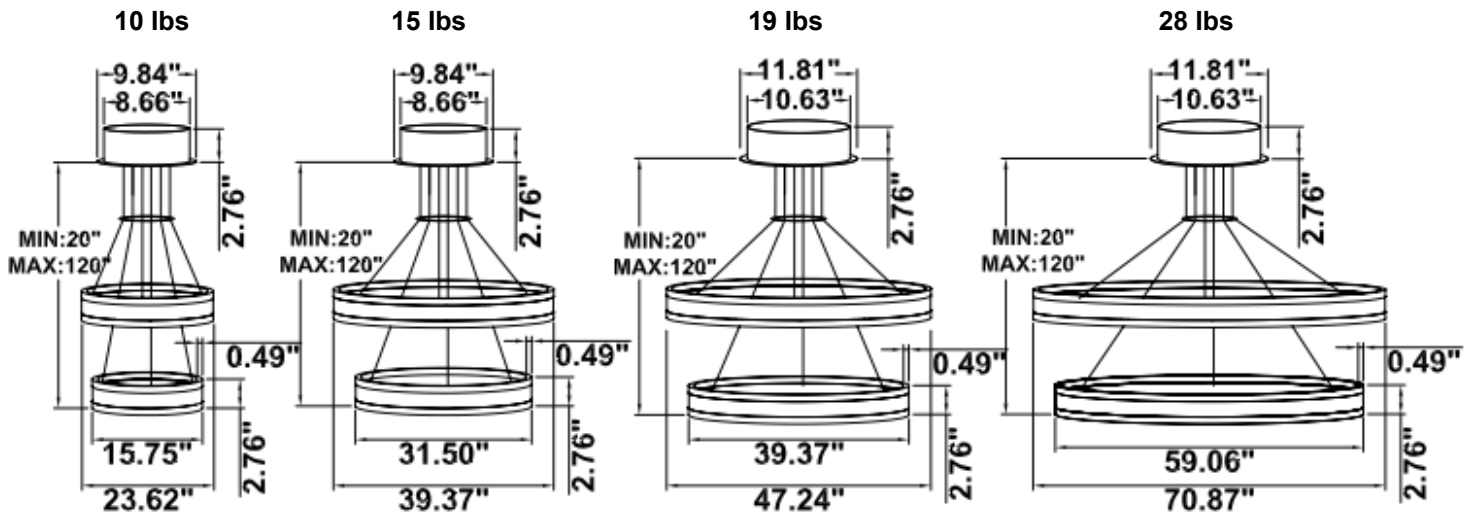


SB-U02C Remote driver with cables fixed directly into the ceiling, direct and indirect lighting.
(Driver box size: L10.83" X W3.78" X H1.81")

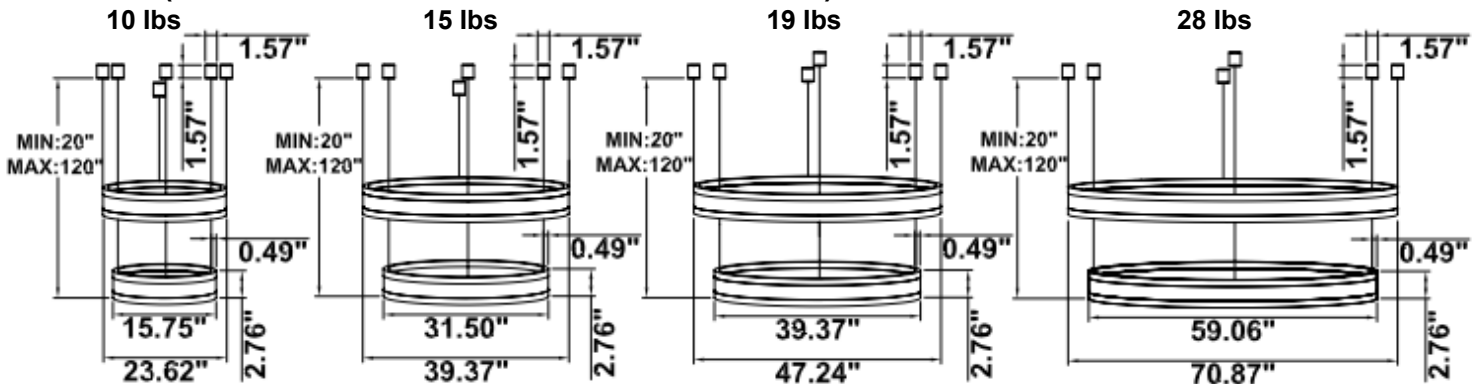


SB-U02D Canopy mount with swiveled rings, direct and indirect lighting.

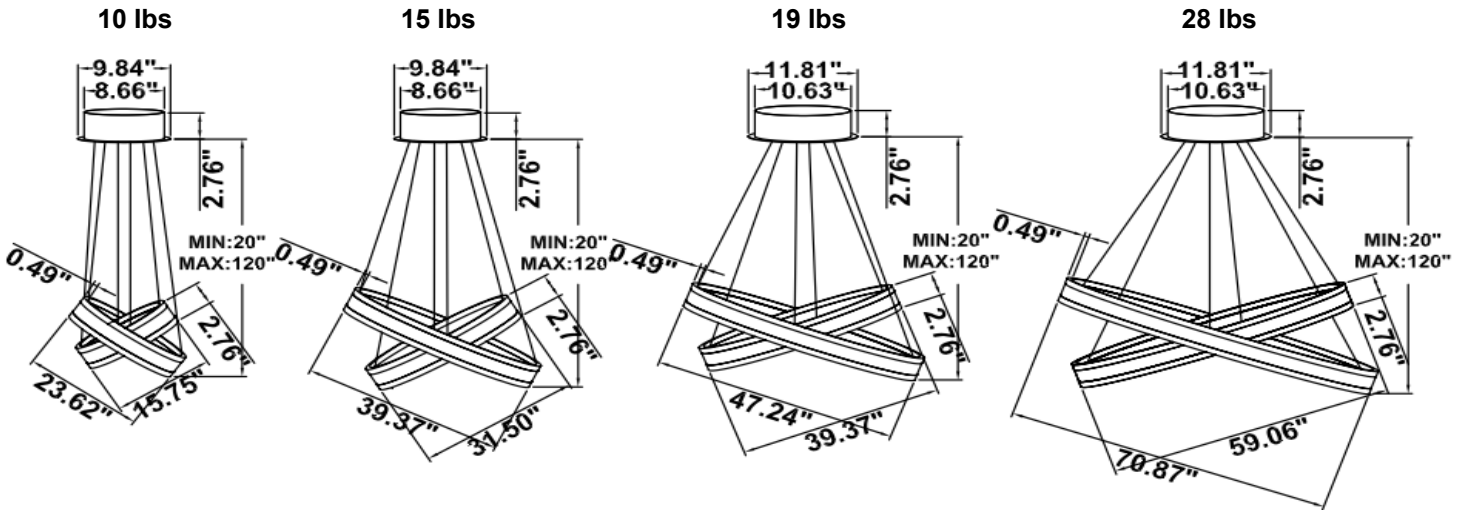


SB-U02E Canopy mount with cables fixed directly into the ceiling, direct and indirect lighting.

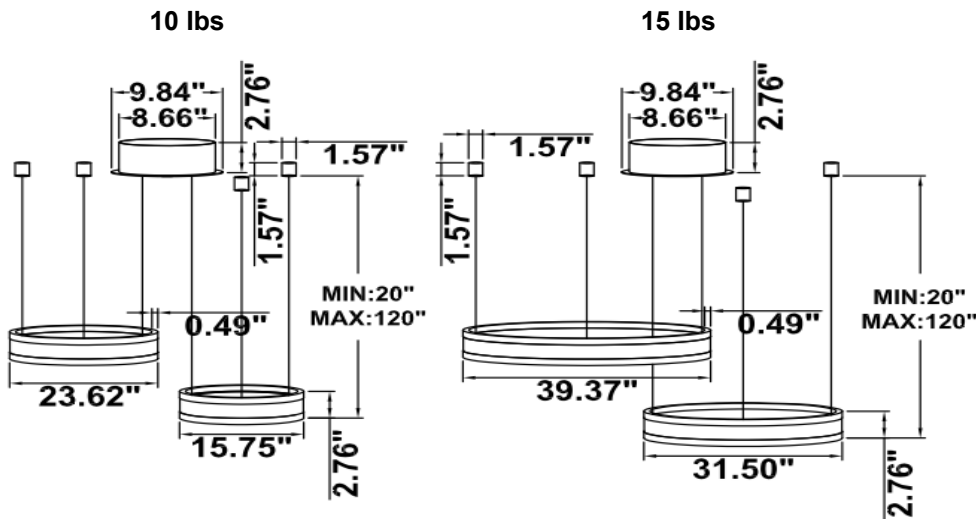

SB-U02E Canopy mount with cables fixed directly into the ceiling, direct and indirect lighting.


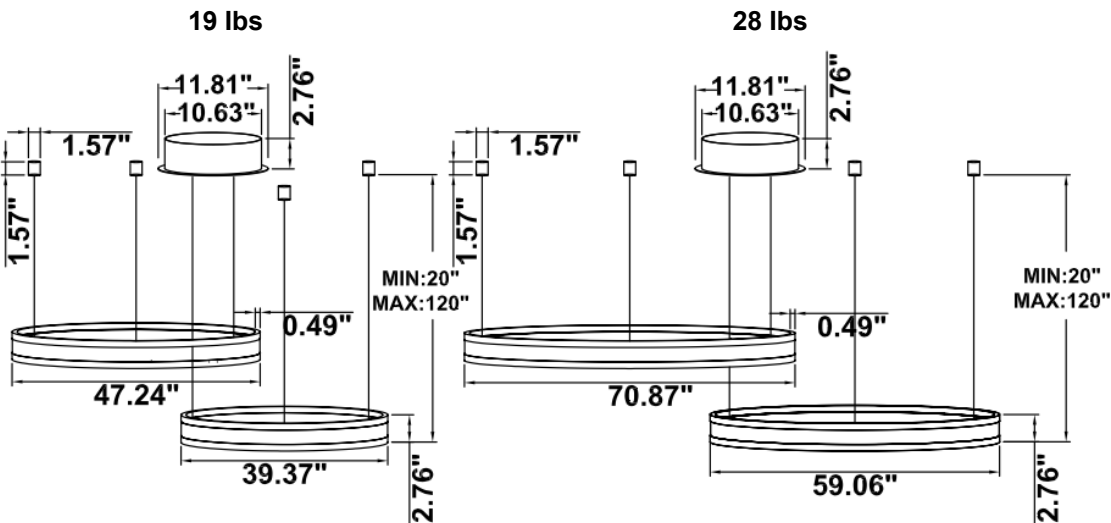


SB-U02F Canopy mount with accent ring and swiveled rings, direct and indirect lighting.

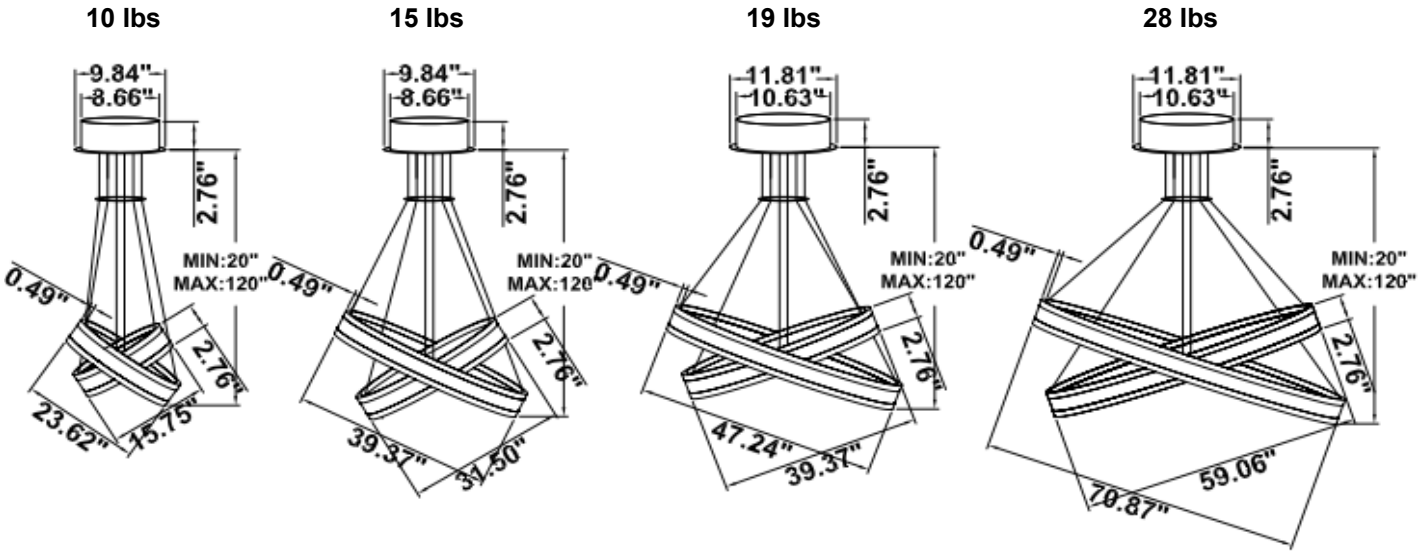


PHOTOMETRIC: Direct Illumination (Testing for single ring only)

15.75" 20W @ 4000K

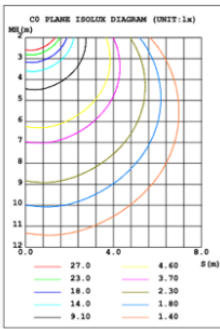
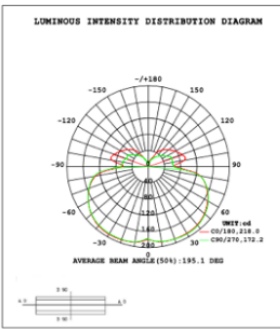


Flux out: 966.3 lm

Height	Eavg, Emax	Angle: 171.68deg	Diameter
1m	1.504, 183.11x		2749.76cm
2m	0.3760, 45.781x		5499.52cm
3m	0.1671, 20.351x		8249.28cm
4m	0.0940, 11.451x		10999.04cm
5m	0.0602, 7.3251x		13748.80cm
6m	0.0418, 5.0871x		16498.56cm
7m	0.0307, 3.7371x		19248.32cm
8m	0.0235, 2.8611x		21998.08cm
9m	0.0186, 2.2611x		24747.84cm
10m	0.0150, 1.8311x		27497.60cm

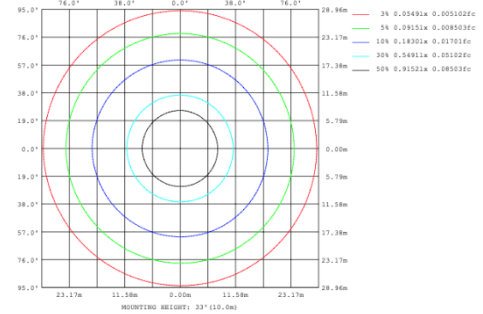


23.62" 30W @ 4000K

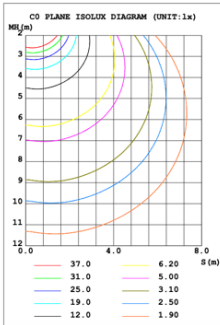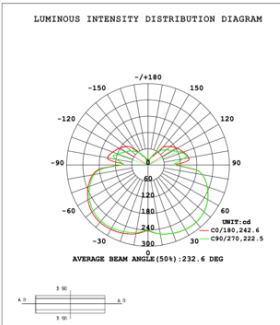


Flux out: 1475 lm

Height	Eavg, Emax	Angle: 176.03deg	Diameter
1m	0.1430, 248.31x		5770.56cm
2m	0.0358, 62.081x		11541.13cm
3m	0.0159, 27.591x		17311.69cm
4m	0.0089, 15.521x		23082.25cm
5m	0.0057, 9.9331x		28852.81cm
6m	0.0040, 6.8981x		34623.38cm
7m	0.0029, 5.0681x		40393.94cm
8m	0.0022, 3.8801x		46164.50cm
9m	0.0018, 3.0661x		51935.07cm
10m	0.0014, 2.4831x		57705.63cm

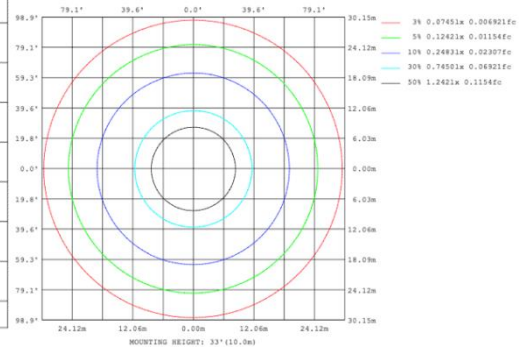


31.50" 40W @ 4000K

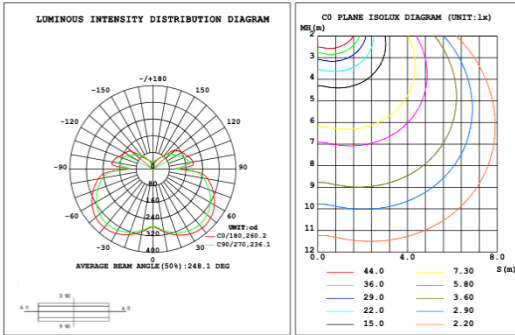


Flux out:1906 lm

Height	Eavg, Emax	Angle:178.35deg	Diameter
1m	0.0000, 291.01lx		13888.98cm
2m	0.0000, 72.751lx		27777.95cm
3m	0.0000, 32.331lx		41666.93cm
4m	0.0000, 18.191lx		55555.91cm
5m	0.0000, 11.641lx		69444.89cm
6m	0.0000, 8.083lx		83333.86cm
7m	0.0000, 5.938lx		97222.84cm
8m	0.0000, 4.547lx		111111.82cm
9m	0.0000, 3.592lx		125000.80cm
10m	0.0000, 2.910lx		138889.77cm

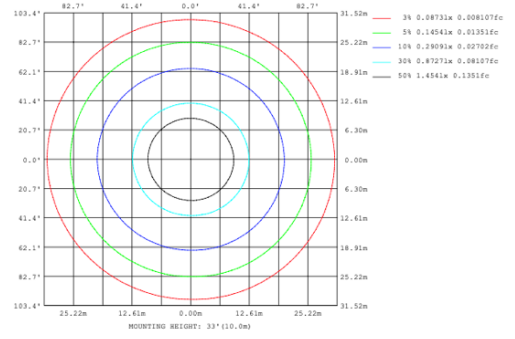


39.37" 50W @ 4000K

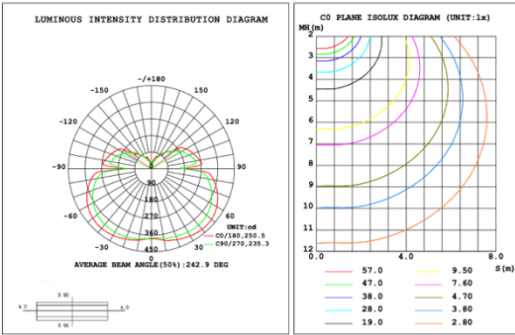


Flux out:2283 lm

Height	Eavg, Emax	Angle:178.55deg	Diameter
1m	0.0000, 378.61lx		15804.92cm
2m	0.0000, 94.651lx		31609.84cm
3m	0.0000, 42.071lx		47414.77cm
4m	0.0000, 23.661lx		63219.69cm
5m	0.0000, 15.141lx		79024.61cm
6m	0.0000, 10.521lx		94829.53cm
7m	0.0000, 7.727lx		110634.45cm
8m	0.0000, 5.916lx		126439.38cm
9m	0.0000, 4.674lx		142244.30cm
10m	0.0000, 3.786lx		158049.22cm

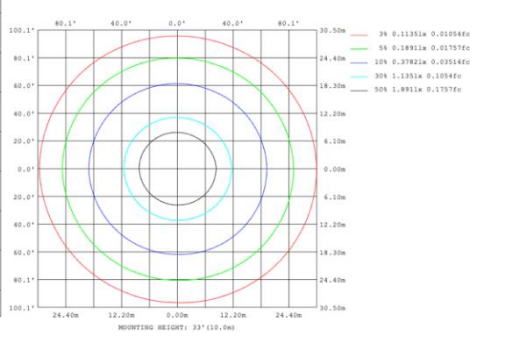


47.24" 60W @ 4000K



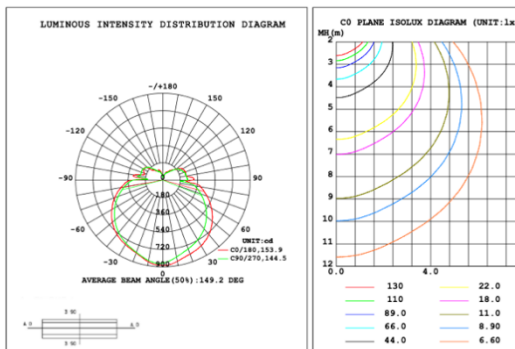


Flux out:2809 lm

Height	Eavg, Emax	Angle:142.17deg	Diameter
1m	94.38, 885.31lx		583.66cm
2m	23.60, 221.31lx		1167.32cm
3m	10.49, 98.36lx		1750.97cm
4m	5.899, 55.33lx		2334.63cm
5m	3.775, 35.41lx		2918.29cm
6m	2.622, 24.59lx		3501.95cm
7m	1.926, 18.07lx		4085.61cm
8m	1.475, 13.83lx		4669.27cm
9m	1.165, 10.93lx		5252.92cm
10m	0.9438, 8.85lx		5836.58cm

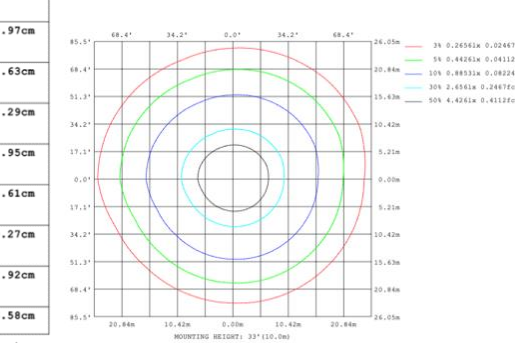

59.06" 70W @ 4000K

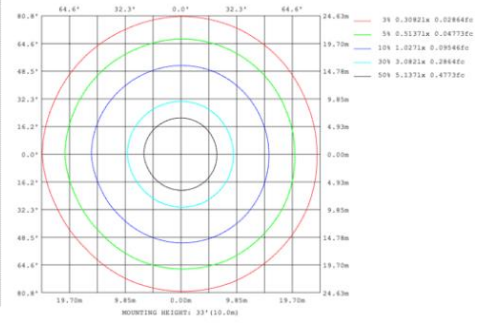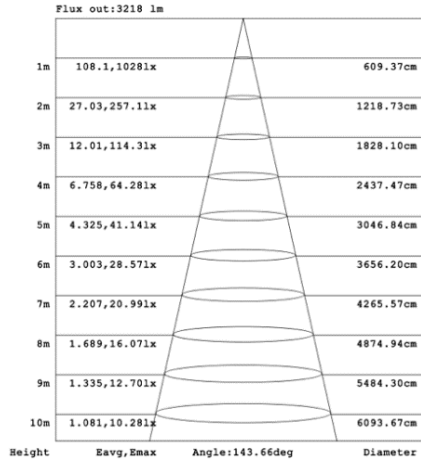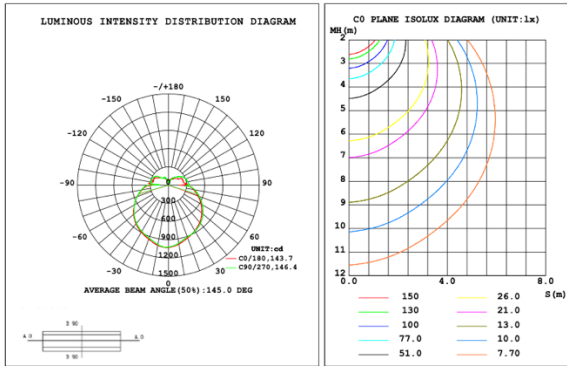

70.87" 80W @ 4000K

