



Light Outside

Light Inside

[View Kimberly 1 tier on website](#)

[View Video](#)

[View application photos](#)

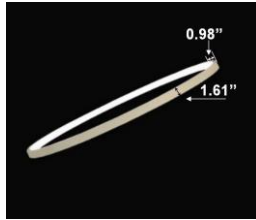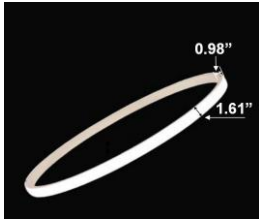

Kimberley 1 Tier

PRODUCT DESCRIPTION

Introducing the Kimberley Circular Lighting, a harmonious blend of modern design and functionality. Crafted from extruded aluminum with meticulously designed lenses, these luminaires offer options illumination inside or outside. Available in sizes ranging from 31.5” to 70.87”, allowing for versatile configurations. With tunable white and RGBW options, select from over 6,500 powder-coated colors to set the perfect ambiance. Delivered fully assembled for your convenience.

FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination inside or outside the profile.
- Extruded aluminum housing up to 70.87”, 1 continuous ring without joints.
- Fixture lumens per watt ratio up to 75 LPW for illumination.
- 10’ standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.
- Can be remote driver mounted or driver concealed within the canopy, can be mounted on sloped ceiling.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC, Dali, DMX, ZigBee available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.



SB-S01A



SB-S01B



SB-S01C



SB-S01D



SB-S01E



SB-S01F



SB-S01G




SB-S01H



SB-S01I

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch



Selectable CCT







MODEL INFORMATION:

Example: SB-S01A40WSB

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-S01A	*40W = 31.5"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming (default)	*B=Black Jack	*Blank=10' foot 120" (default)
SB-S01B			C= Dali	S=Platinum Silver	5'=5 foot 60"
SB-S01C					
SB-S01D	30W = 23.62"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	W=Gloss White	15'=15 foot 180"
SB-S01E				O=Oil Rubbed Bronze	20'=20 foot 240"
SB-S01F	50W = 39.37"				
SB-S01G		T=3K-4K Tunable White control by remote/wall control	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.		25'=25 foot 300"
SB-S01H	60W = 47.24"				
SB-S01I	70W = 59.06"	R3= RGB+3000K	L=ELV / Triac dimming		30'=30 foot 360"
	80W = 70.87"	R4=RGB+4000K			
<p>Please request specialty pricing for alternative Kelvin temperatures, additional sizes, customizable configurations, specialty color finishes, variations in aircraft cable length, and available controls.</p>			<p>See control options</p>	<p>Find page 3 for custom color options or select from website Color Collections</p>	

STANDARD COLOR FINISHES



Discover beyond our standard hues with over 6,500 [finishes and colors](#) available for your luminaire, including precise color matching, NFL team colors, and custom RAL finishes. Elevate your design with metallic, sparkle, or transparent textures for a touch of individuality. Explore our most popular selections below and contact our factory for personalized quotes.

You can request color swatches by emailing us at customerservice@snowball-inc.com

Please note: Colors may appear differently due to screen display settings.



SOLID TONE FINISH

PMB-4364 Pearl White	PMB-0593 Soft White	PSB-8051 Dirty White	PMB-0513 Silver Metallic II	PMB-6525 BMW Silver	HSS-1336 Silk Satin Black
PSS-0106 Ink Black	USS-2603 Gloss Black	UMB-0336 Metallic Bronze	UMB-0493 US Bronze	EMS-0940 Spanish Gold	PMB-0808 Performance Gold
PSS-4971 Very Red	PSS-2876 Orange Glow	PSS-1791 JuJu Orange	PSS-0118 Spring Yellow	PSB-5945 Bright Green	PMB-10657 Yama Blue
PPB-2846 Purple Glaze	PSS-1670 Rosette Pink	PSS-4008 Jewel Grey	PSS-4500 Crest Grey	PSS-4647 Beach Tan	PMB-5478 Montana Gold

SHIMMER/ GLITTER FINISH

PMB-5567 Champagne Shimmer	UMB-2062 Shimmer Gold	PMS-5677 Shimmer Copper	PMB-6611 Shimmer Black	PPB-8167 Trans Glitter Gold	PMB-6762 Alloy Glitter
--------------------------------------	---------------------------------	-----------------------------------	----------------------------------	---------------------------------------	----------------------------------

PALLEON METALLIC TEXTURED FINISH

PVB-10274 Palleon Paradise	PVB-10272 Palleon Fire	PVB-10271 Palleon Golden Green	PVB-10268 Dark Palleon Paradise	PVB-10267 Dark Palleon Golden Green	PVB-10268 Dark Palleon Fire
PVB-10273 Palleon Panther	PVB-10269 Dark Palleon Panther				

CHROME/SPECIALTY FINISH

UMS-10671 Super Chrome Plus	PPB-6677 Black Chrome III	PMB-4124 Bronze Chrome	UMB-10813 Rose Chrome	UMB-10815 Brass Chrome	UMB-10816 Copper Chrome
PPS-6530 Brassy Gold	PPB-2262 Anodized Gold	PPB-8034 Melted Bronze	PPB-6325 Metallic Clear	PPB-5633 Tinted Clear	PPB-5936 Anodized Red

SPARKLE FINISH

PPB-4694 Super Red Sparkle	PPB-4727 Silver Sparkle	PPB-5835 Rockstar Sparkle	PMB-4130 Pearl Sparkle	PPB-5004 Ultra Blue Sparkle	PPB-5078 Magnum Blue Sparkle
PMB-2750 Dark Grey Sparkle	PMB-6769 Deep Blue Sparkle	PPB-4499 Gold Sparkle	PMB-4417 Baby Blue Sparkle		

WETSTONE WRINKLED TEXTURE FINISH


PWB-2232 Wetstone Black	PWB-9157 Wetstone Gold Bronze	PWB-9156 Wetstone Copper	PWB-2343 Wetstone Rock Bronze	PWB-2590 Wetstone Emerald II
-----------------------------------	---	------------------------------------	---	--

LUMEN OUTPUT

Model Number	Size	Wattage	Kevin Temp field selectable	Lumen
SB-S01 A/B/C/D/E/F/G/H/I	23.62"	30W	2700K/3500K/3500K 3000K/3500K/4000K	2250 lm
	31.5"	40W	2700K/3500K/3500K 3000K/3500K/4000K	3000 lm
	39.37"	50W	2700K/3500K/3500K 3000K/3500K/4000K	3750 lm
	47.24"	60W	2700K/3500K/3500K 3000K/3500K/4000K	4500 lm
	59.06"	70W	2700K/3500K/3500K 3000K/3500K/4000K	5250 lm
	70.87"	80W	2700K/3500K/3500K 3000K/3500K/4000K	6000 lm

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

Get Smart


Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"


SB-S01A Canopy mount with ring light inside.

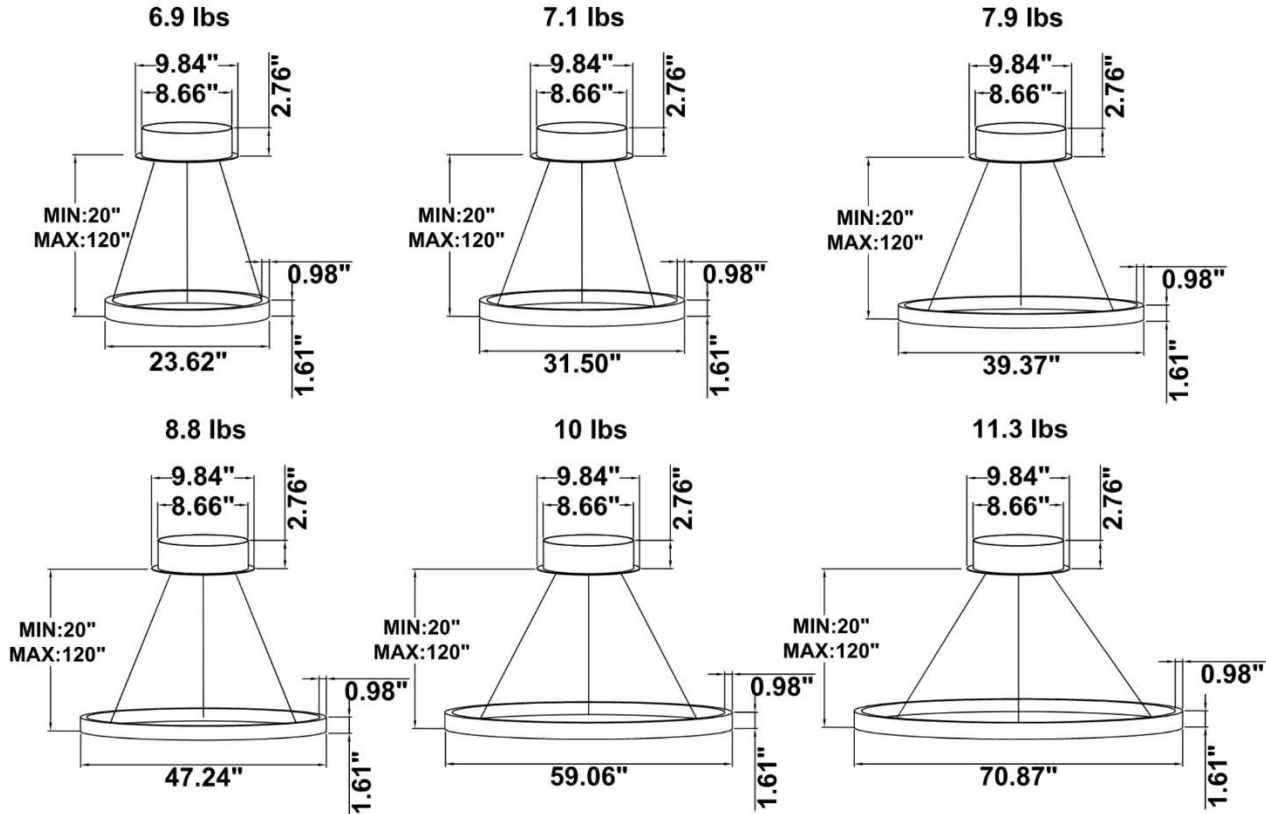


SB-S01B Canopy mount with ring light outside.

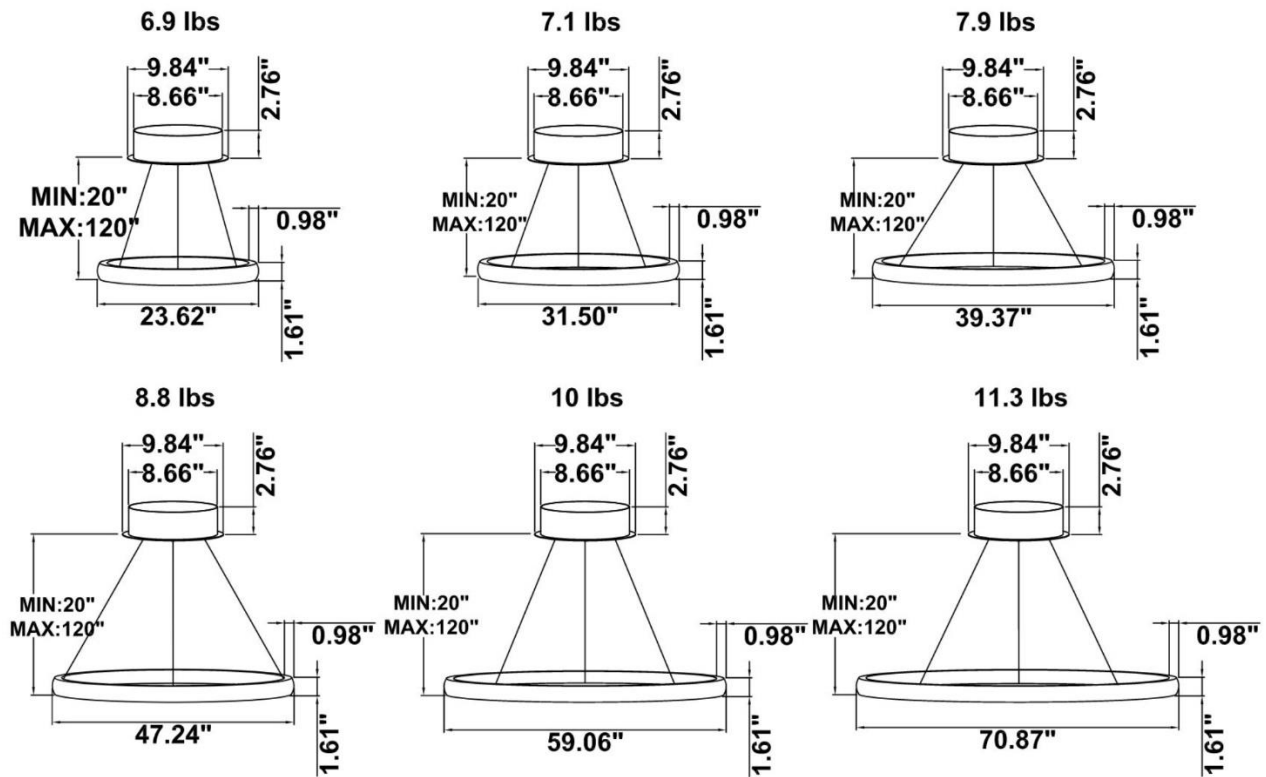


**SB-S01C Remote driver with cables fixed directly into the ceiling, light inside.
(Driver box size: L10.83" X W3.78" X H1.81")**

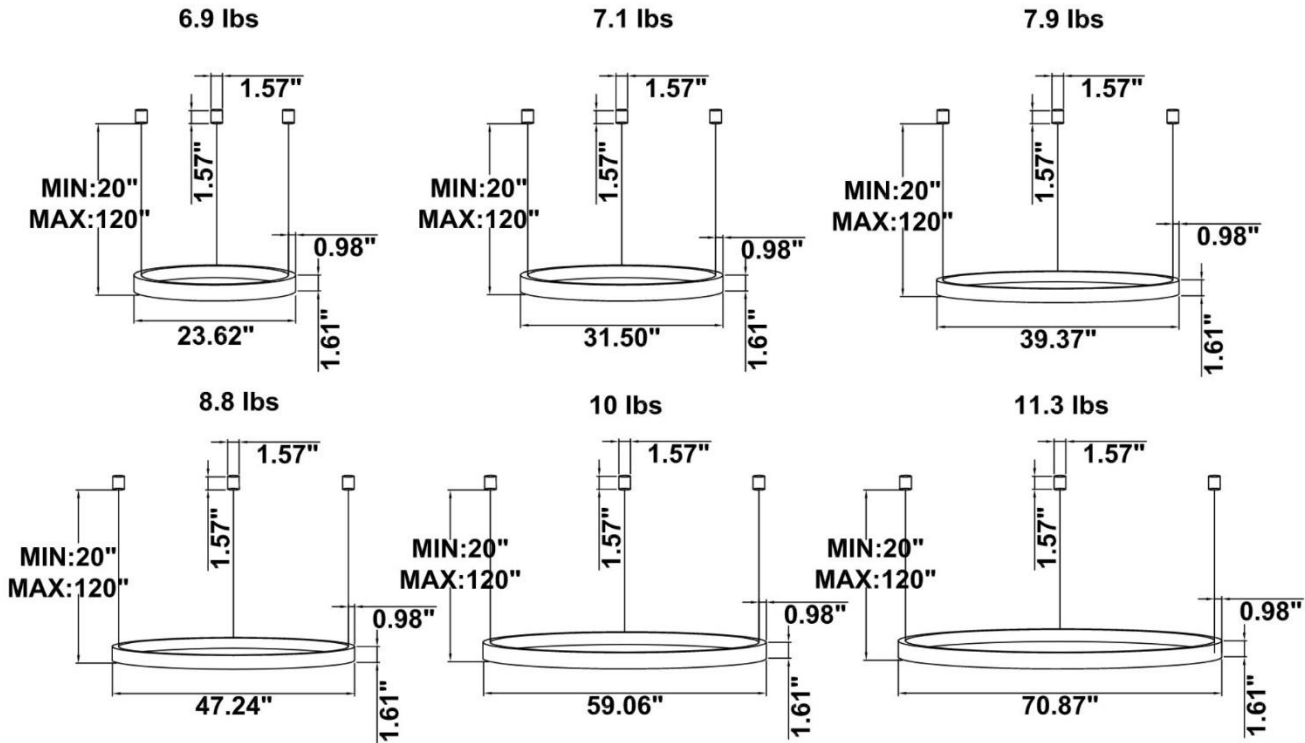


**SB-S01D Remote driver with cables fixed directly into the ceiling, light outside.
(Driver box size: L10.83" X W3.78" X H1.81")**

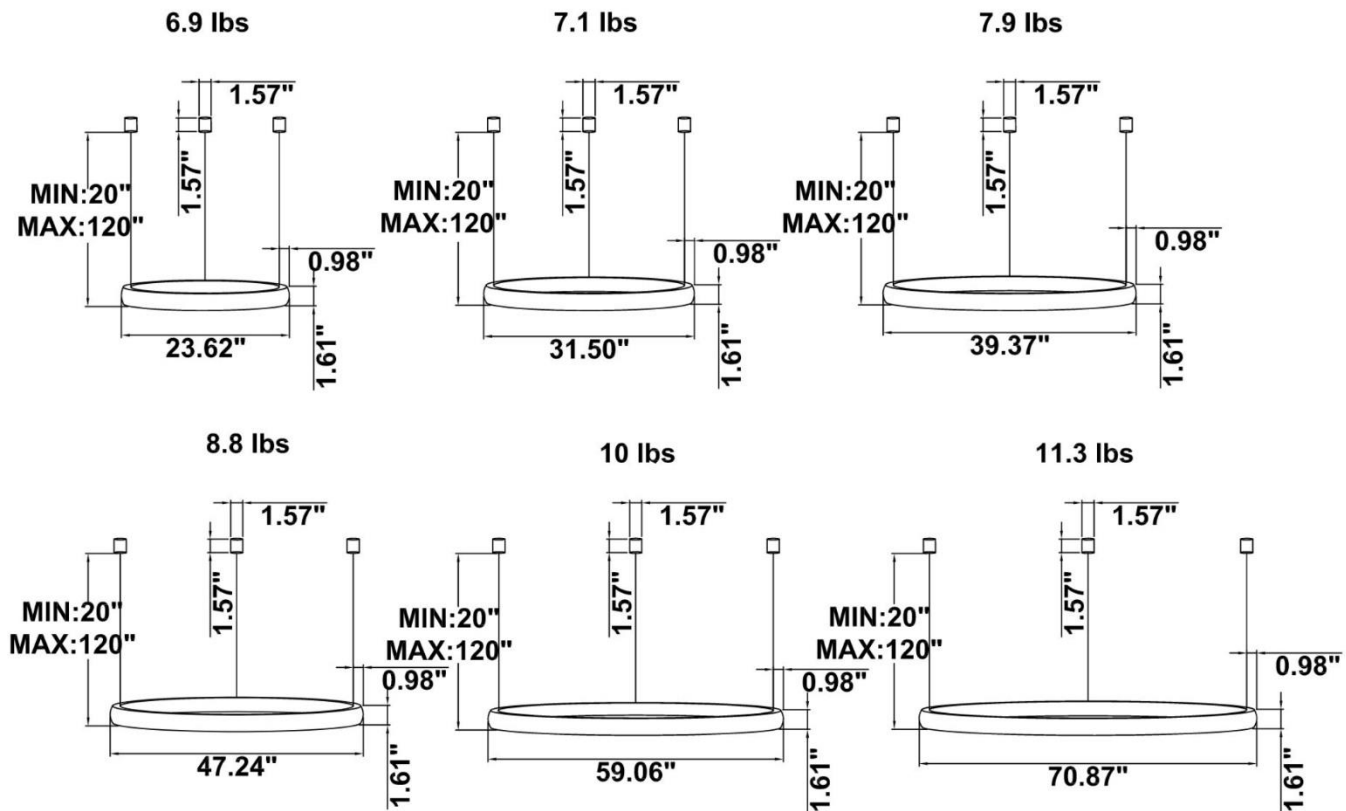


SB-S01E Canopy mount with accent ring, light inside.

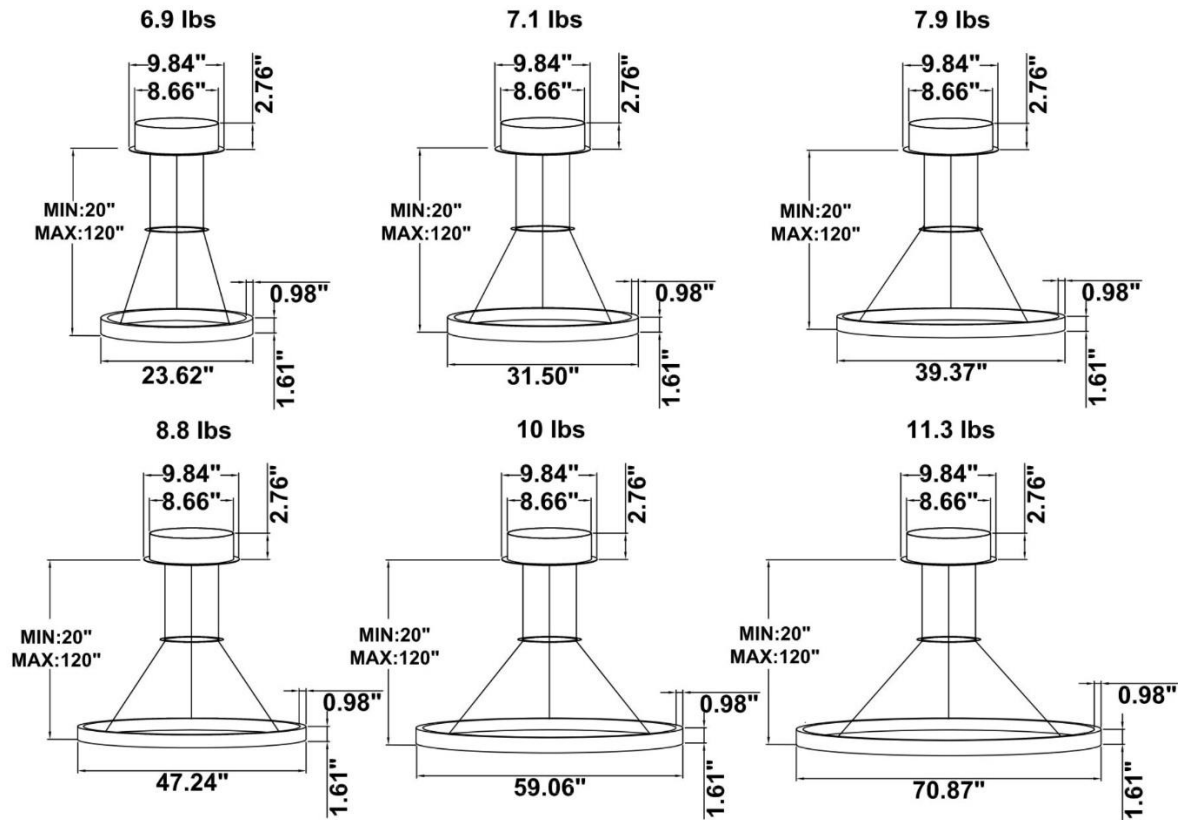


SB-S01F Canopy mount with accent ring, light outside.

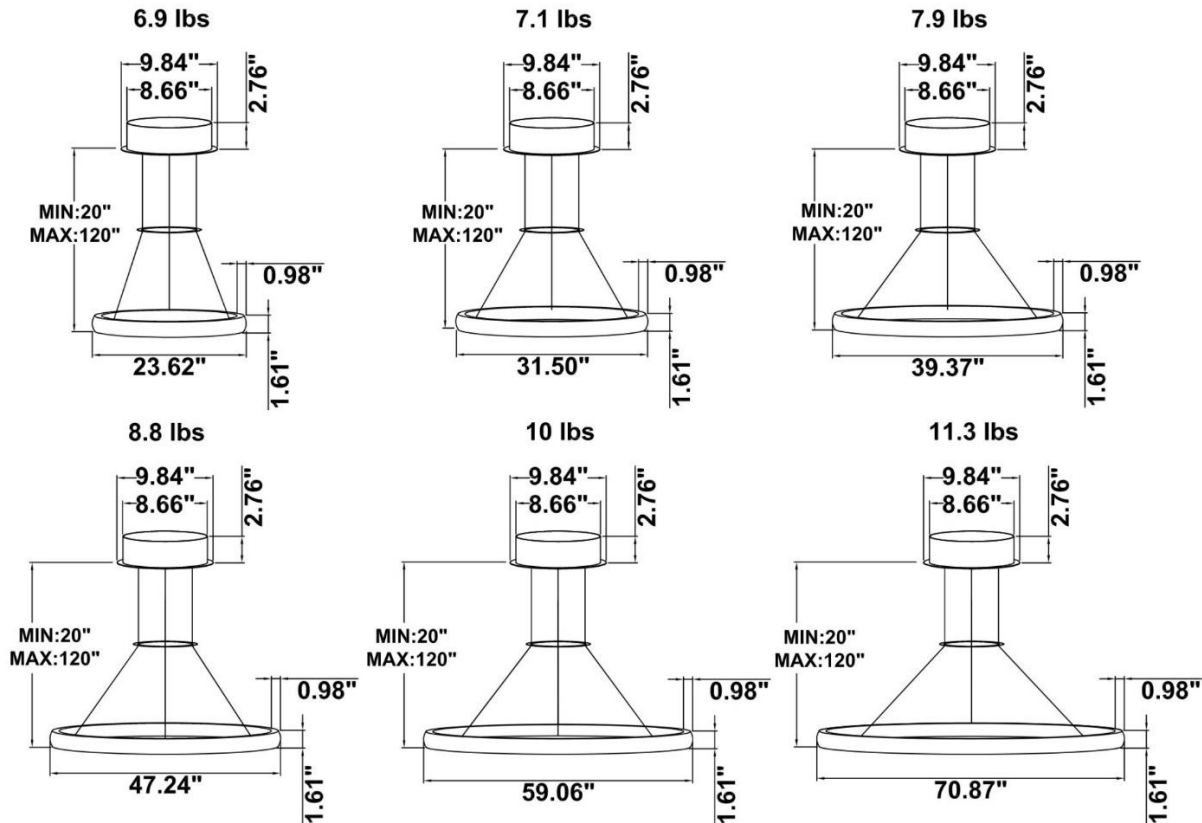


SB-S01G Remote driver with cable splitter, light outside.

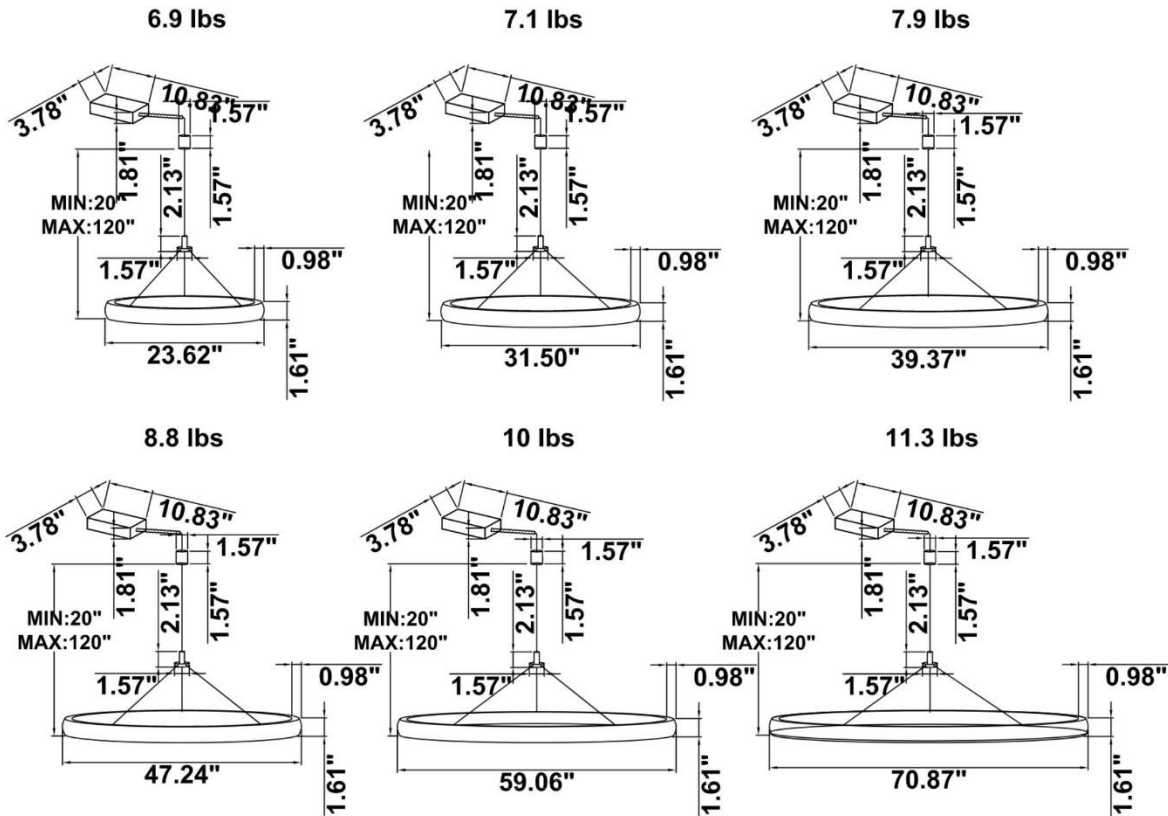

SB-S01H Canopy mount with cable splitter, light outside.




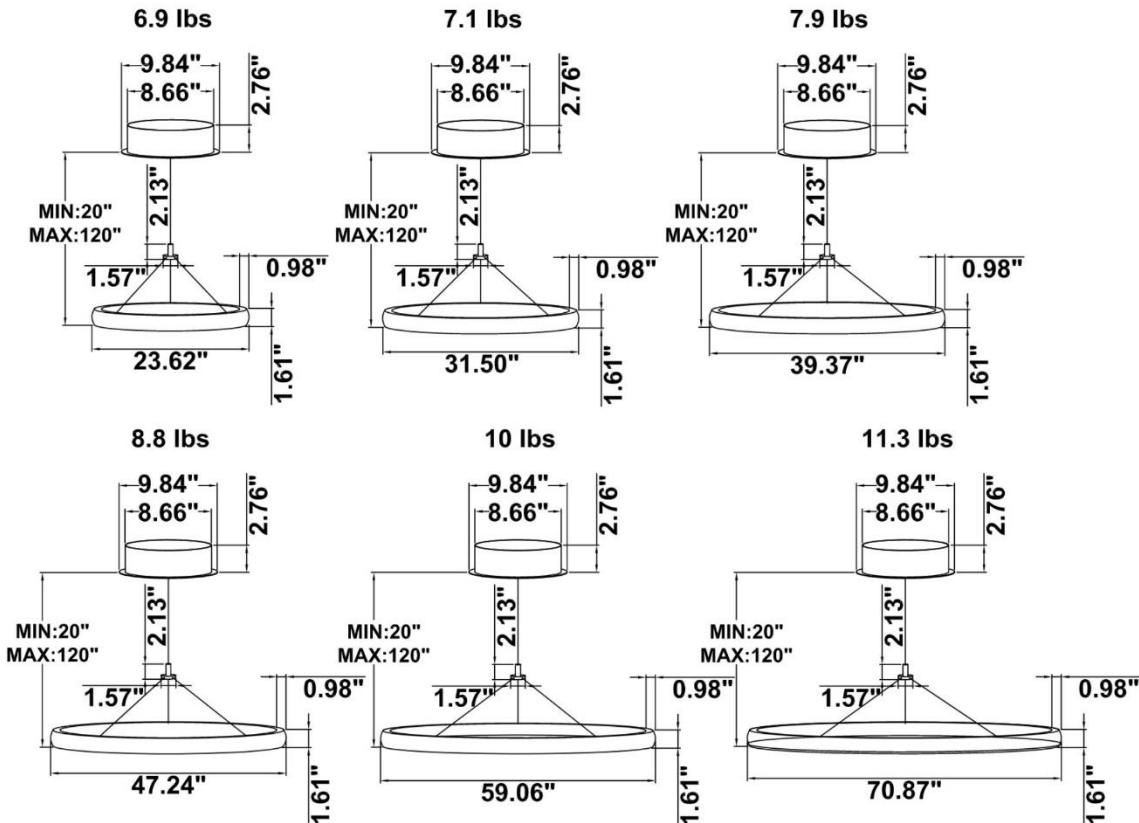


SB-S011 Surface mount with light inside.




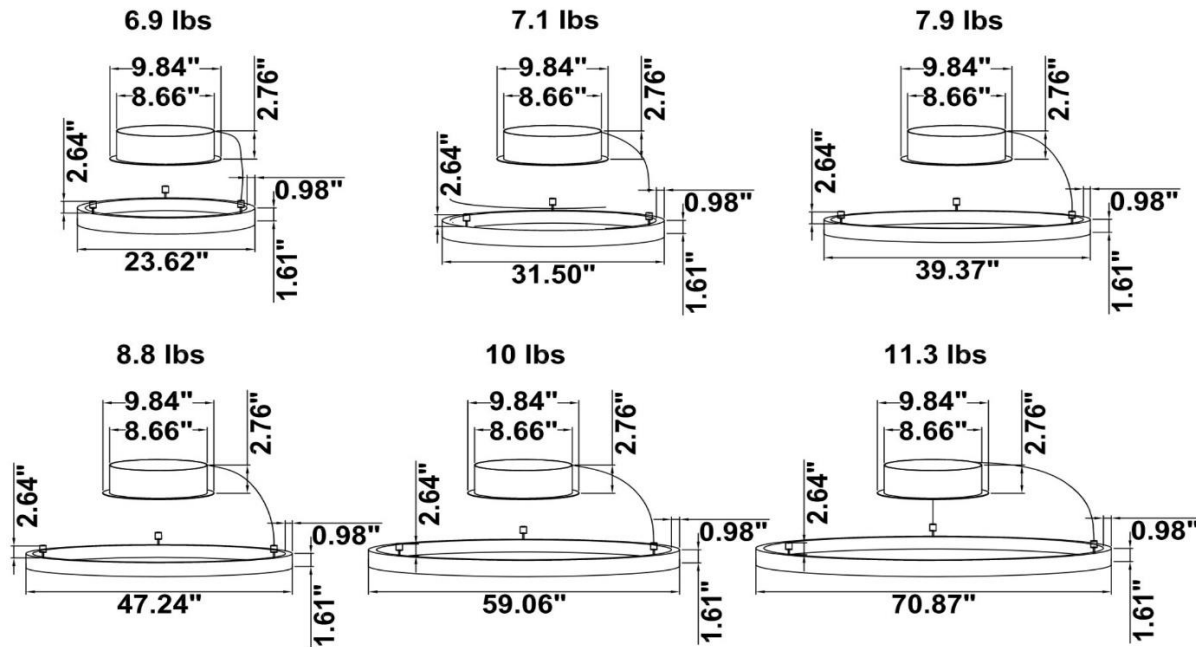


PHOTOMETRIC: Illumination outside the profile, light inside



SB-S01A40WZ 31.50" 40W @ 4000K

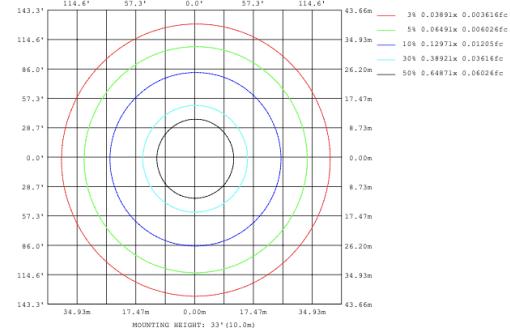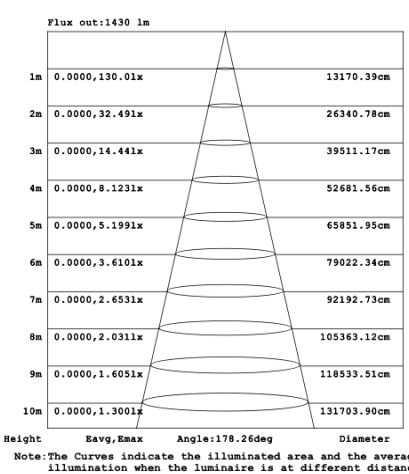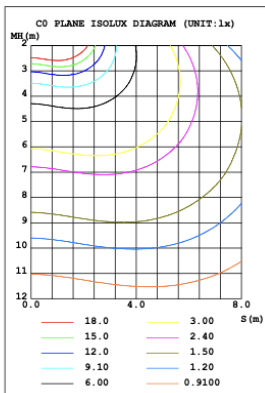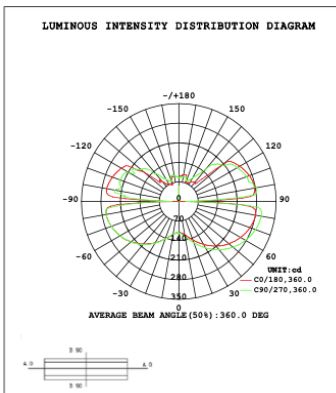

SB-S01A50WZ 39.37" 50W @ 4000K

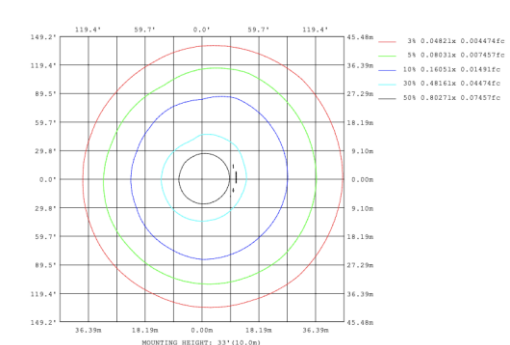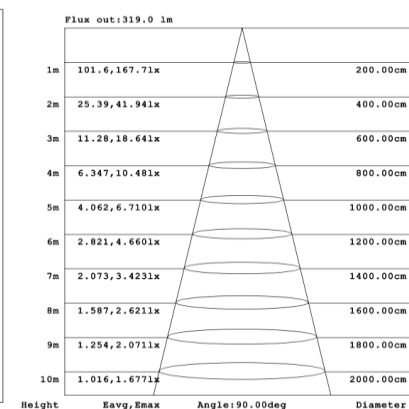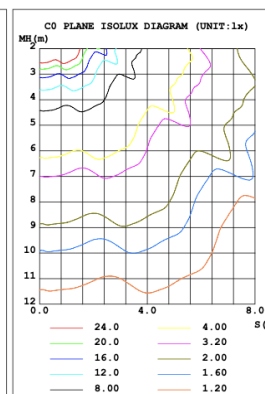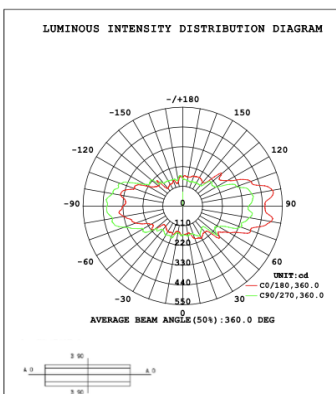


SB-S01A60WZ 47.24" 60W @ 4000K

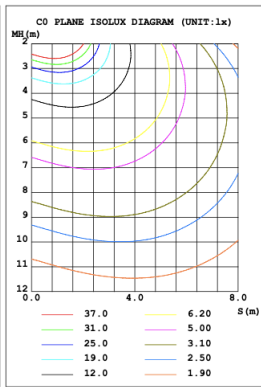
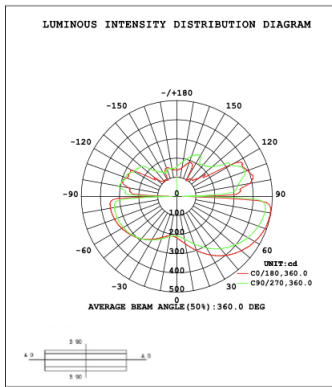


Flux out:2216 lm

Height	Eavg, Emax	Angle:178.18deg	Diameter
1m	0.0000, 256.31x		12591.48cm
2m	0.0000, 64.071x		25182.95cm
3m	0.0000, 28.471x		37774.43cm
4m	0.0000, 16.021x		50365.90cm
5m	0.0000, 10.251x		62957.38cm
6m	0.0000, 7.1181x		75548.85cm
7m	0.0000, 5.2301x		88140.33cm
8m	0.0000, 4.0041x		100731.80cm
9m	0.0000, 3.1641x		113323.28cm
10m	0.0000, 2.5631x		125914.75cm

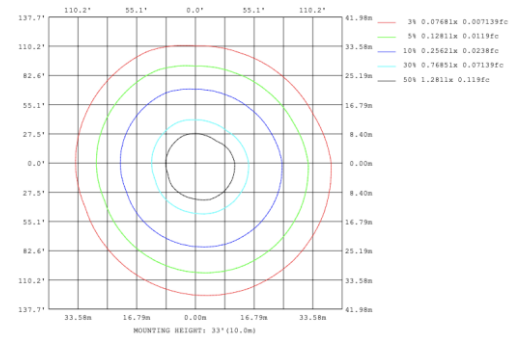


SB-S01A70WZ 59.06" 70W @ 4000K

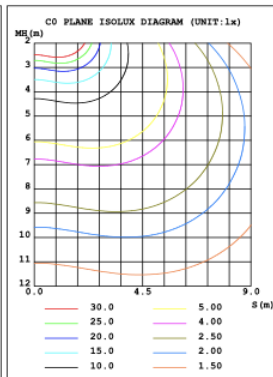
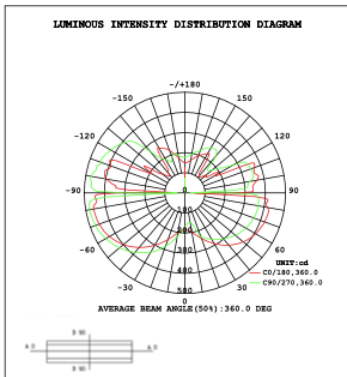


Flux out:538.9 lm

Height	Eavg, Emax	Angle:90.00deg	Diameter
1m	171.5, 235.61x		200.00cm
2m	42.88, 58.911x		400.00cm
3m	19.06, 26.181x		600.00cm
4m	10.72, 14.731x		800.00cm
5m	6.861, 9.4261x		1000.00cm
6m	4.765, 6.5461x		1200.00cm
7m	3.501, 4.8091x		1400.00cm
8m	2.680, 3.6821x		1600.00cm
9m	2.118, 2.9091x		1800.00cm
10m	1.715, 2.3561x		2000.00cm

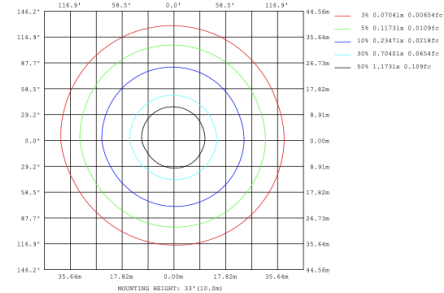


SB-S01A80WZ 70.87" 80W @ 4000K

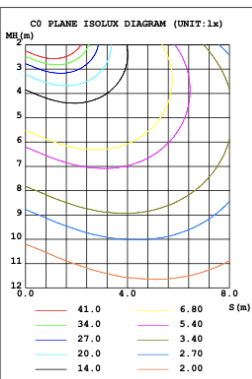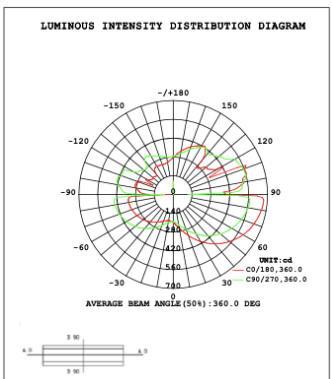


Flux out:318.7 lm

Height	Eavg, Emax	Angle:68.36deg	Diameter
1m	206.9, 271.41x		135.83cm
2m	51.73, 67.841x		271.66cm
3m	22.99, 30.151x		407.49cm
4m	12.93, 16.961x		543.32cm
5m	8.278, 10.851x		679.15cm
6m	5.748, 7.5381x		814.98cm
7m	4.223, 5.5381x		950.81cm
8m	3.233, 4.2401x		1086.64cm
9m	2.555, 3.3501x		1222.47cm
10m	2.069, 2.7141x		1358.29cm

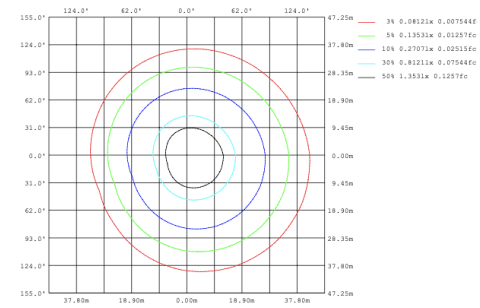


Illumination inside the profile, light outside


SB-S01B40WZ 31.50" 40W @ 4000K

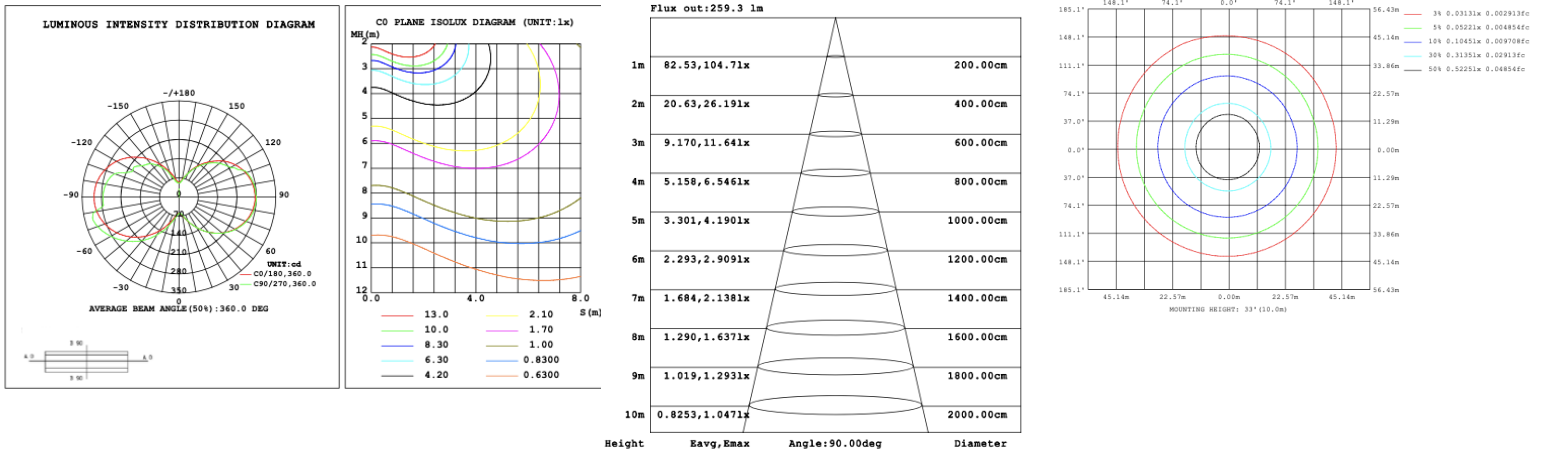





SB-S01B50WZ 39.37" 50W @ 4000K

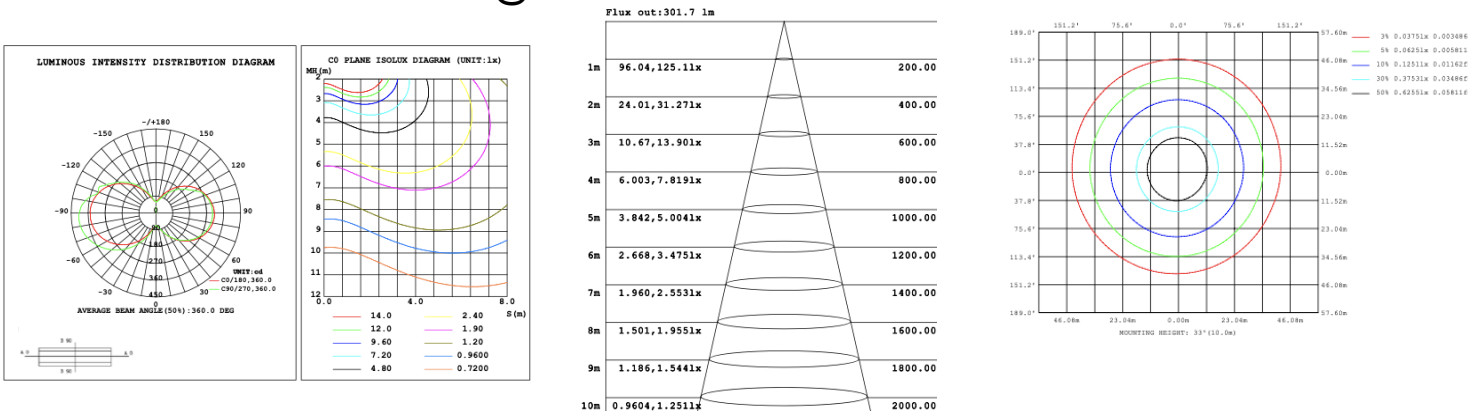

SB-S01B60WZ 47.24" 60W @ 4000K

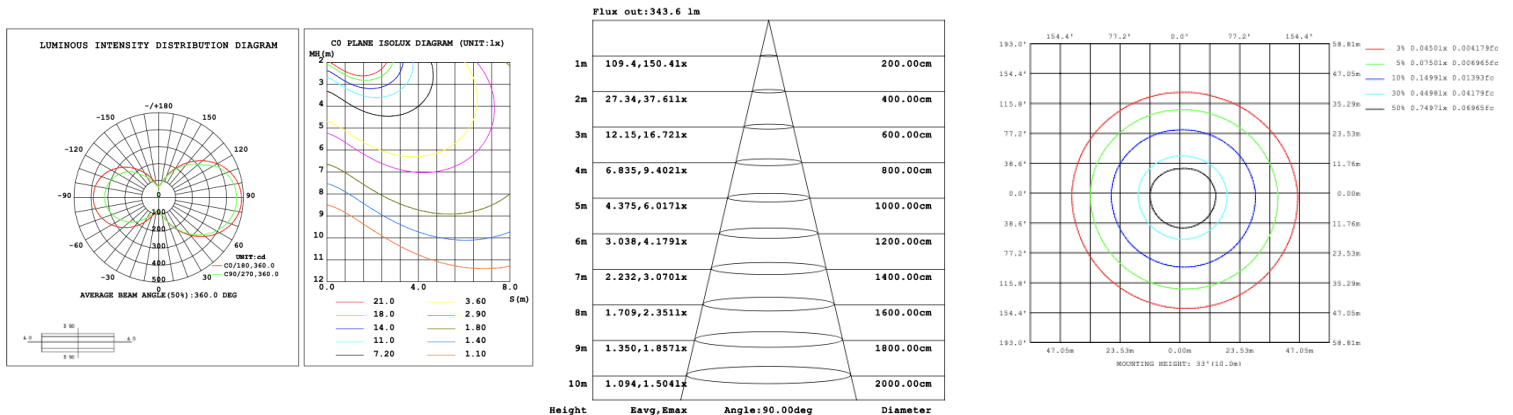

SB-S01B70WZ 59.06" 70W @ 4000K

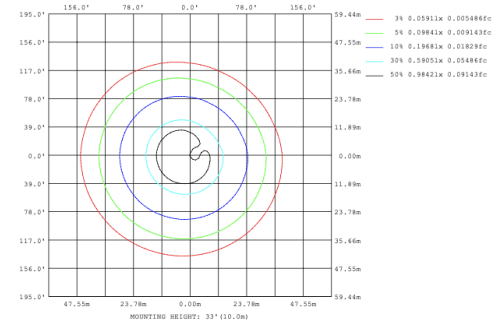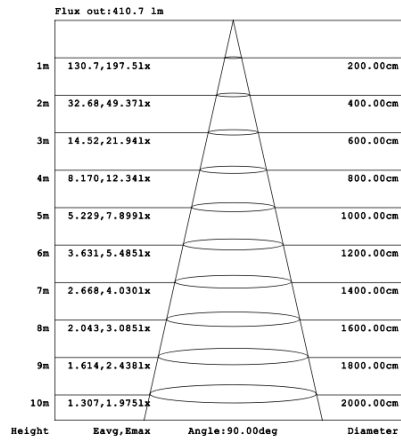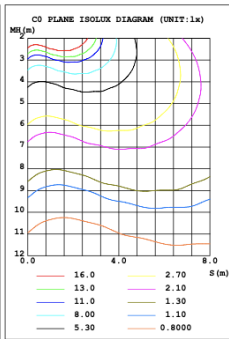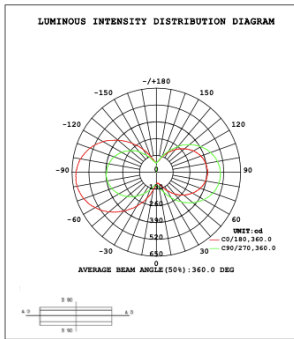

SB-S01B80WZ 70.87" 80W @ 4000K

