

[View Kimberly 3 tier on website](#)

[View Video](#)

[View application photos](#)

Light Outside

Light Inside

Kimberly 3 Tier

PRODUCT DESCRIPTION

Introducing the Kimberly Circular Lighting, a harmonious blend of modern design and functionality. Crafted from extruded aluminum with meticulously designed lenses, these luminaires offer options illumination inside or outside. Available in sizes ranging from 31.5" to 70.87", allowing for versatile configurations. With tunable white and RGBW options, select from over 6,500 powder-coated colors to set the perfect ambiance. Delivered fully assembled for your convenience.

FEATURES




- 5-year limited warranty.
- Ships assembled.
- Illumination inside/outside aluminum
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- White frosted acrylic diffuser, Glare-free lens
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.
- Fixture lumens per watt ratio up to 75 LPW for illumination
- Can be remote driver mounted or driver concealed within the canopy, can be mounted on sloped ceiling.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC, Dali, DMX and Zigbee available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch


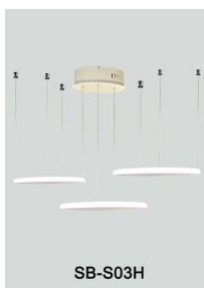




MODEL INFORMATION:

Example: SB-S03A150WSB

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-S03A	*150W=47.24"+39.37"+31.50"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming (default)	*B=Black Jack	*Blank=10' foot 120" (default)
SB-S03B			C=Dali	S=Platinum Silver	5'=5 foot 60"
SB-S03C				W=Gloss White	15'=15 foot 180"
SB-S03D			180W=59.06"+47.24"+39.37"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)
SB-S03E	L=ELV / Triac dimming	25'=25 foot 300"			
SB-S03F					
SB-S03G	210W=70.87"+ 59.06"+47.24"	T=3K-4K Tunable White control by remote/wall control	R3= RGB+3000K		
SB-S03H				R4=RGB+4000K	
SB-S03I					
SB-S03J	<p>Please request specialty pricing for alternative Kelvin temperatures, additional sizes, customizable configurations, specialty color finishes, variations in aircraft cable length, and available controls.</p>		See control options	<p>Full Color Name or RAL number for Custom Colors, select from Color Collections</p>	
SB-S03K					
SB-S03L					

STANDARD COLOR FINISHES



Discover beyond our standard hues with over 6,500 [finishes and colors](#) available for your luminaire, including precise color matching, NFL team colors, and custom RAL finishes. Elevate your design with metallic, sparkle, or transparent textures for a touch of individuality. Explore our most popular selections below and contact our factory for personalized quotes.

You can request color swatches by emailing us at customerservice@snowball-inc.com

Please note: Colors may appear differently due to screen display settings.



SOLID TONE FINISH

PMB-4364 Pearl White	PMB-0593 Soft White	PSB-8051 Dirty White	PMB-0513 Silver Metallic II	PMB-6525 BMW Silver	HSS-1336 Silk Satin Black
PSS-0106 Ink Black	USS-2603 Gloss Black	UMB-0336 Metallic Bronze	UMB-0493 US Bronze	EMS-0940 Spanish Gold	PMB-0808 Performance Gold
PSS-4971 Very Red	PSS-2876 Orange Glow	PSS-1791 JuJu Orange	PSS-0118 Spring Yellow	PSB-5945 Bright Green	PMB-10657 Yama Blue
PPB-2846 Purple Glaze	PSS-1670 Rosette Pink	PSS-4008 Jewel Grey	PSS-4500 Crest Grey	PSS-4647 Beach Tan	PMB-5478 Montana Gold

SHIMMER/ GLITTER FINISH

PMB-5567 Champagne Shimmer	UMB-2062 Shimmer Gold	PMS-5677 Shimmer Copper	PMB-6611 Shimmer Black	PPB-8167 Trans Glitter Gold	PMB-6762 Alloy Glitter
--------------------------------------	---------------------------------	-----------------------------------	----------------------------------	---------------------------------------	----------------------------------

PALLEON METALLIC TEXTURED FINISH

PVB-10274 Palleon Paradise	PVB-10272 Palleon Fire	PVB-10271 Palleon Golden Green	PVB-10268 Dark Palleon Paradise	PVB-10267 Dark Palleon Golden Green	PVB-10268 Dark Palleon Fire
PVB-10273 Palleon Panther	PVB-10269 Dark Palleon Panther				

CHROME/SPECIALTY FINISH

UMS-10671 Super Chrome Plus	PPB-6677 Black Chrome III	PMB-4124 Bronze Chrome	UMB-10813 Rose Chrome	UMB-10815 Brass Chrome	UMB-10816 Copper Chrome
PSS-6530 Brassy Gold	PPB-2262 Anodized Gold	PPB-8034 Melted Bronze	PPB-6325 Metallic Clear	PPB-5633 Tinted Clear	PPB-5936 Anodized Red

SPARKLE FINISH

PPB-4694 Super Red Sparkle	PPB-4727 Silver Sparkle	PPB-5835 Rockstar Sparkle	PMB-4130 Pearl Sparkle	PPB-5004 Ultra Blue Sparkle	PPB-5078 Magnum Blue Sparkle
PMB-2750 Dark Grey Sparkle	PMB-6769 Deep Blue Sparkle	PPB-4499 Gold Sparkle	PMB-4417 Baby Blue Sparkle		

WETSTONE WRINKLED TEXTURE FINISH


PWB-2232 Wetstone Black	PWB-9157 Wetstone Gold Bronze	PWB-9156 Wetstone Copper	PWB-2343 Wetstone Rock Bronze	PWB-2590 Wetstone Emerald II
-----------------------------------	---	------------------------------------	---	--

LUMEN OUTPUT

Model Number	Size	Wattage	Kelvin Temp field Selectable \pm 500K	Delivered Lumen \pm 10%
SB-S03A/B/C/D/E/F/G/H/I/J/K/L	47.24"+39.37"+31.50"	150W	3000K/3500K/4000K or 2700K/3500K/4000K	11250 lm
	59.06"+47.24"+39.37"	180W	3000K/3500K/4000K or 2700K/3500K/4000K	13500 lm
	70.87"+ 59.06"+47.24"	210W	3000K/3500K/4000K or 2700K/3500K/4000K	15750 lm

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

Get Smart


Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"


SB-S03A Canopy mount with ring light inside.

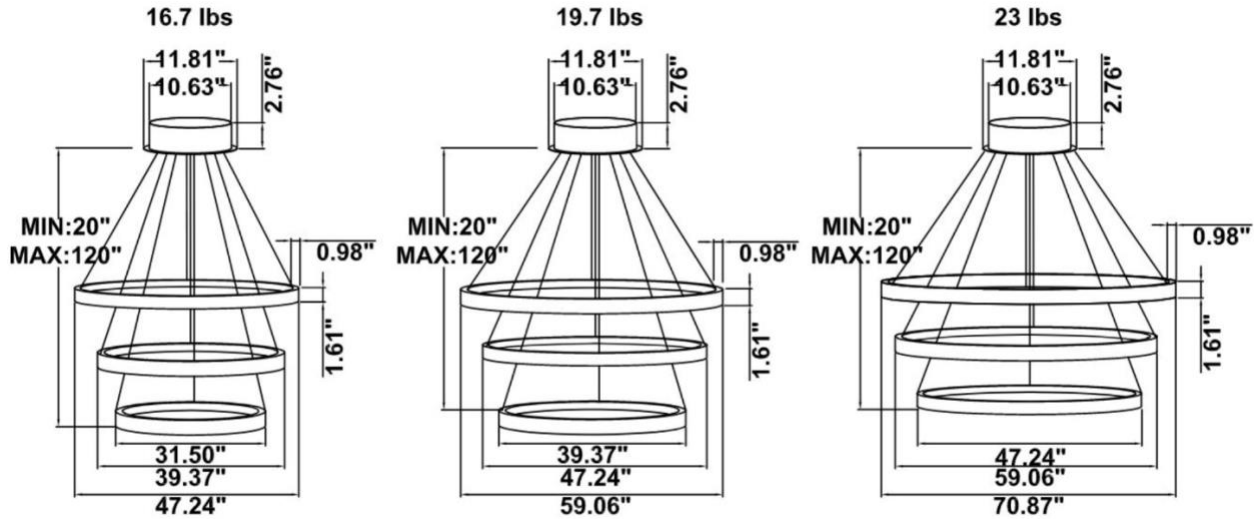


SB-S03B Canopy mount with ring light outside.

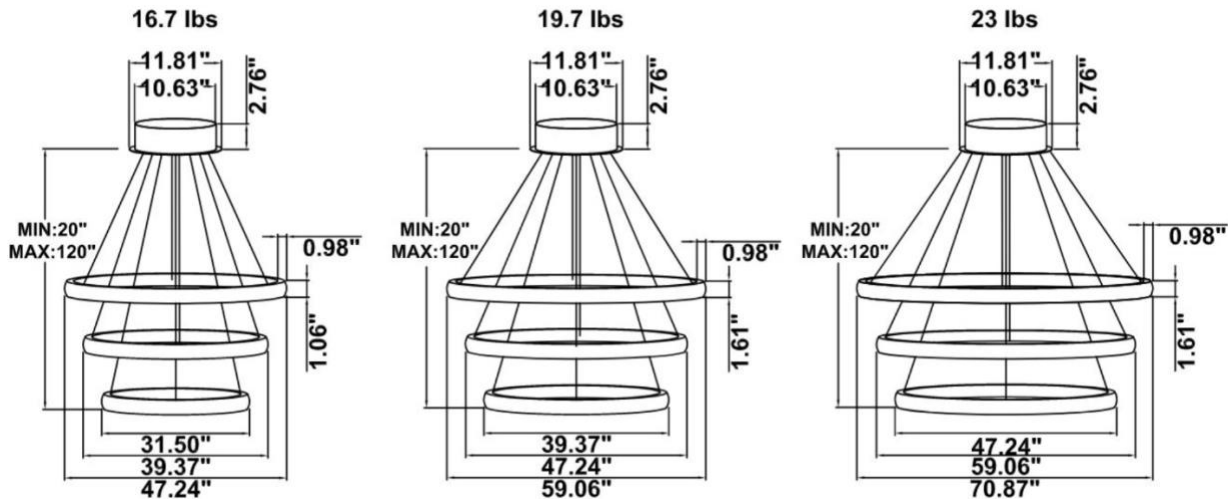


SB-S03C Canopy mount with swiveled rings, light inside.

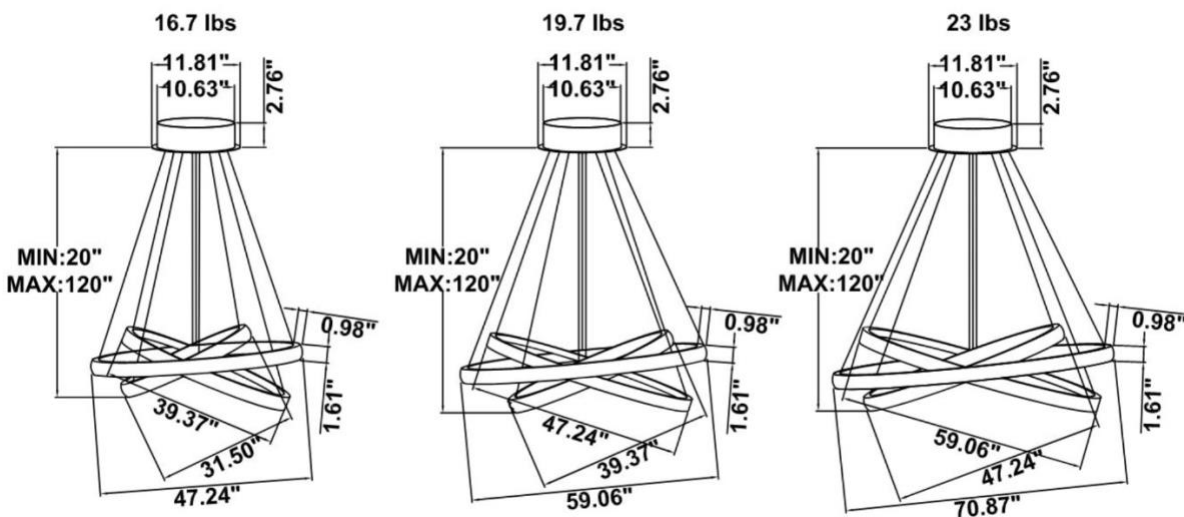


SB-S03D Remote mount with canopy, cables fixed directly to the ceiling, light inside.

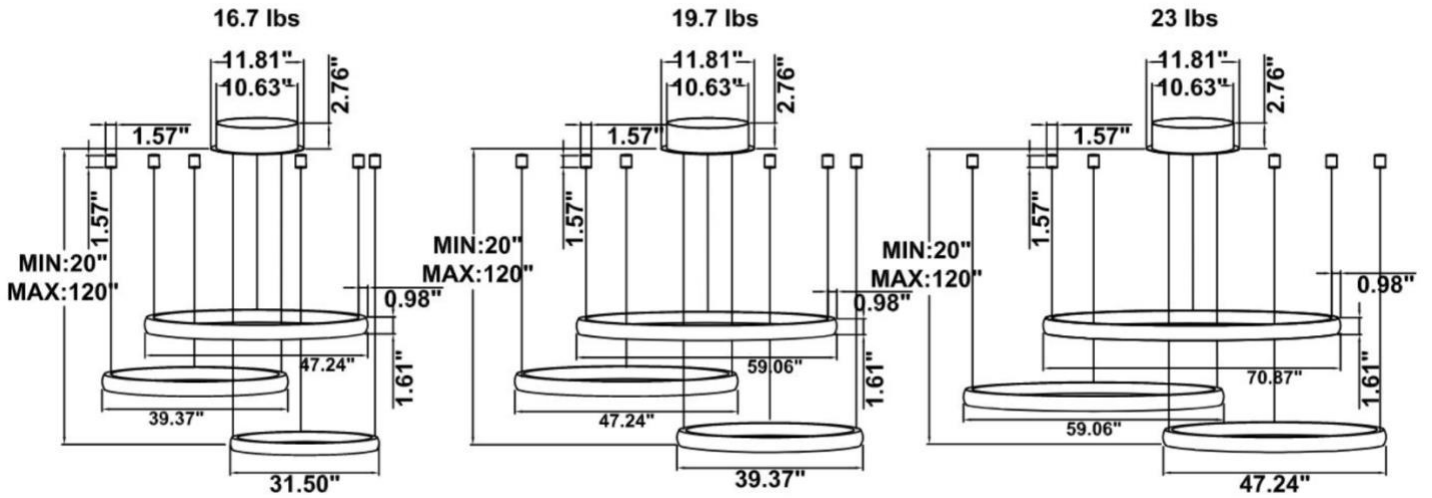


SB-S03E Canopy mount with swiveled rings, light outside.

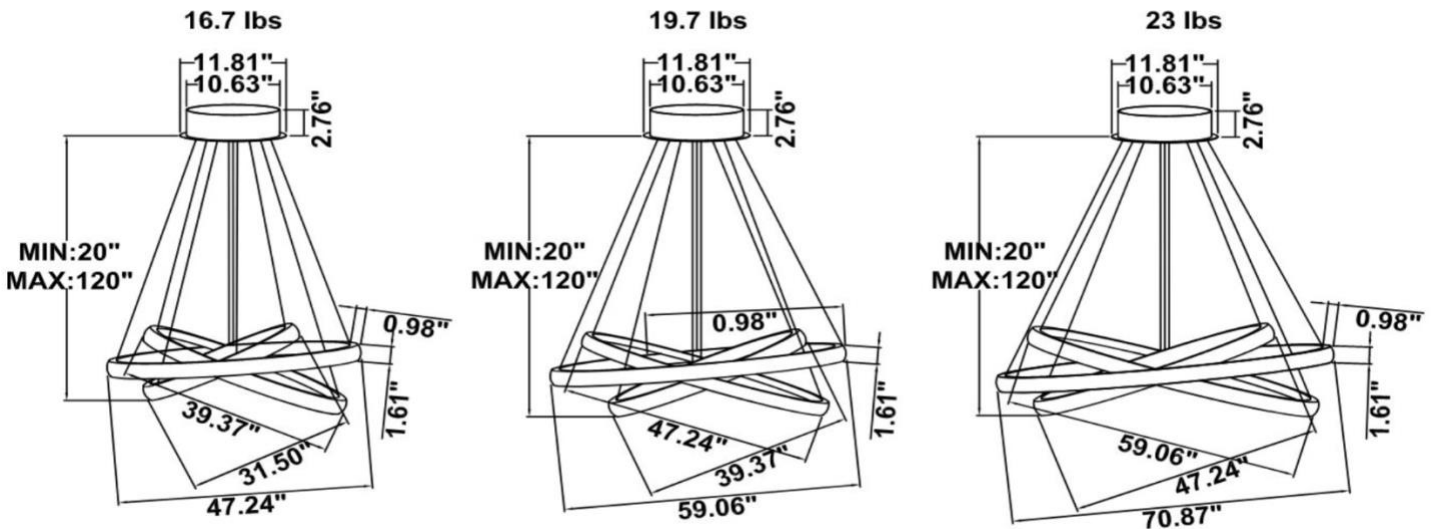


SB-S03F Canopy mount with top two ring lights outside, and the bottom ring light inside.

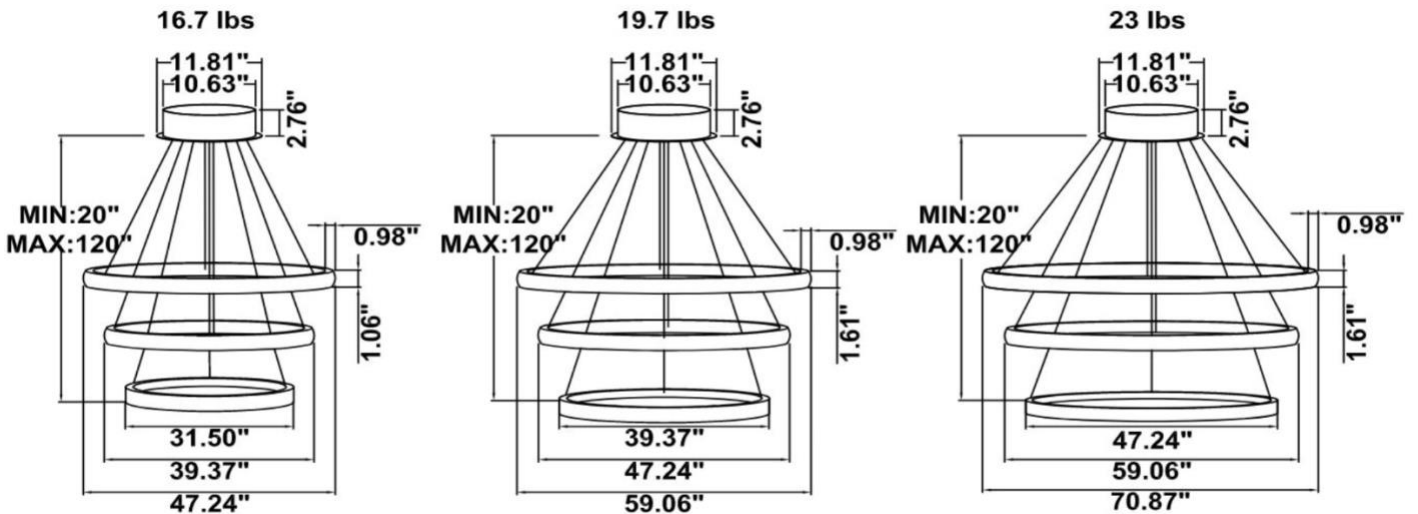


SB-S03G Canopy mount with accent ring, light outside.

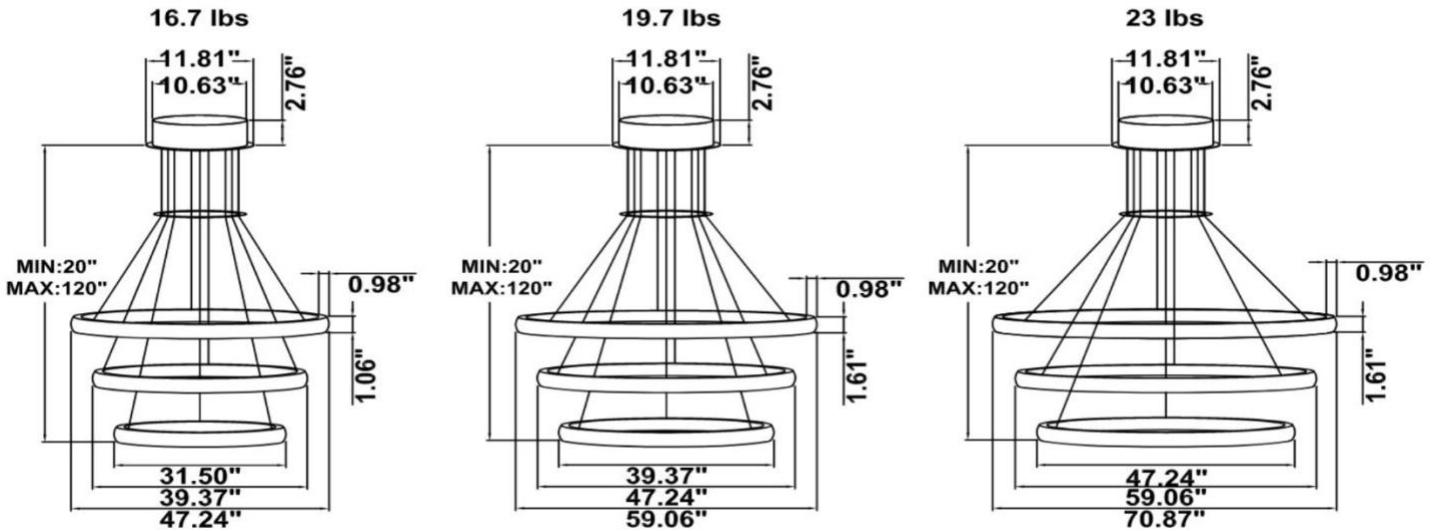


SB-S03H Remote mount with canopy, cables fixed directly to the ceiling, light outside.

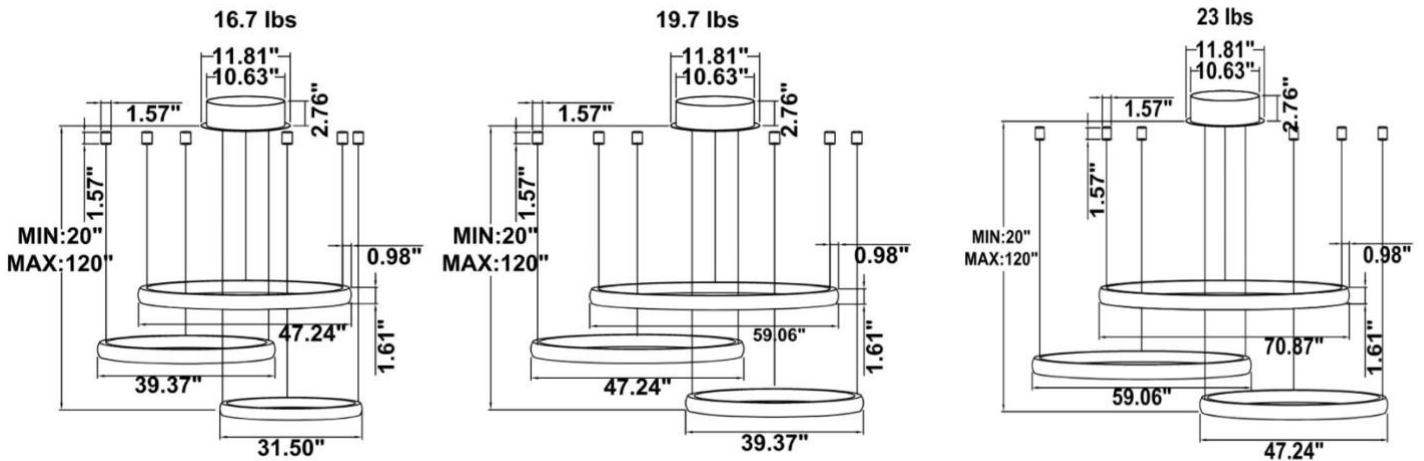


SB-S03I Remote driver, cables fixed directly to the ceiling with ring light inside.
(Driver box size: L10.83" X W3.78" X H1.81")

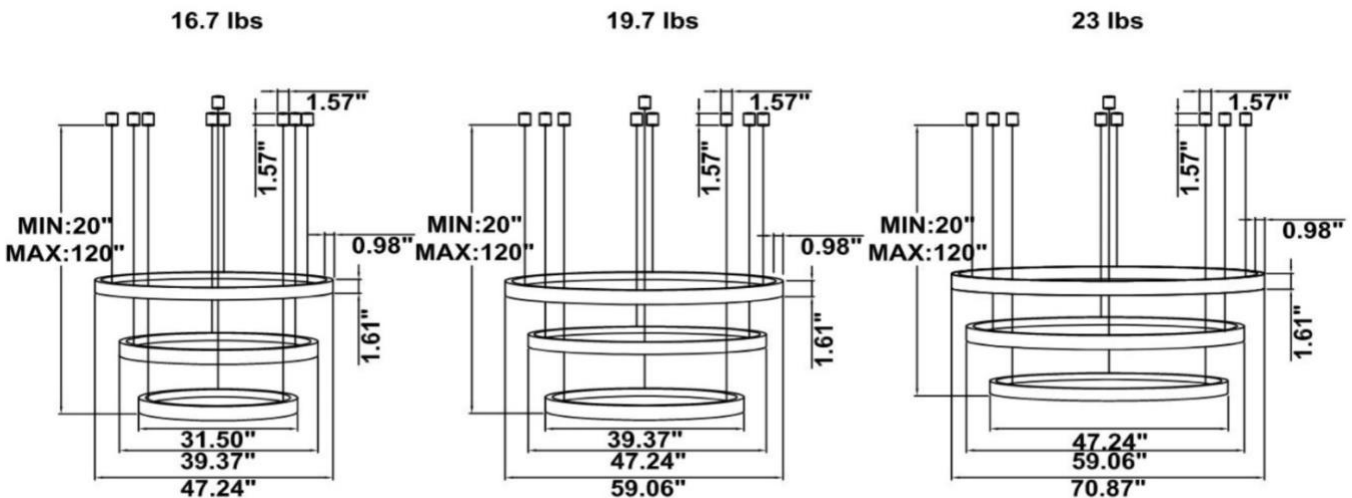


SB-S03J Remote mount with canopy, cables fixed directly to the ceiling with upper and lower light inside, center light outside.

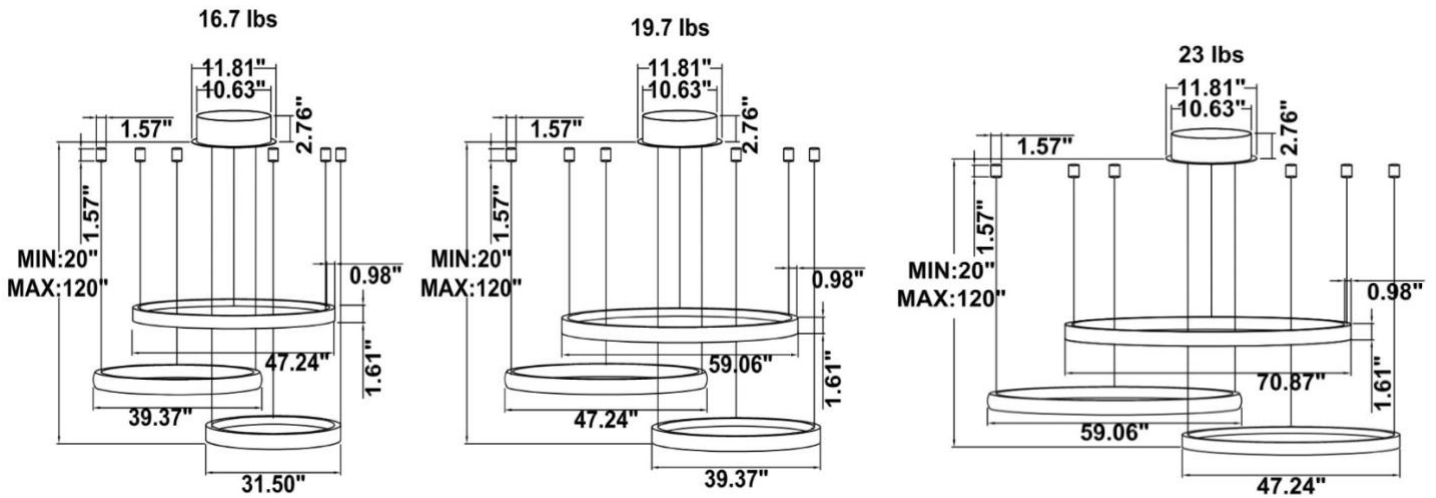

SB-S03K Remote mount with canopy, cables fixed directly to the ceiling, upper and lower light outside, center light inside.


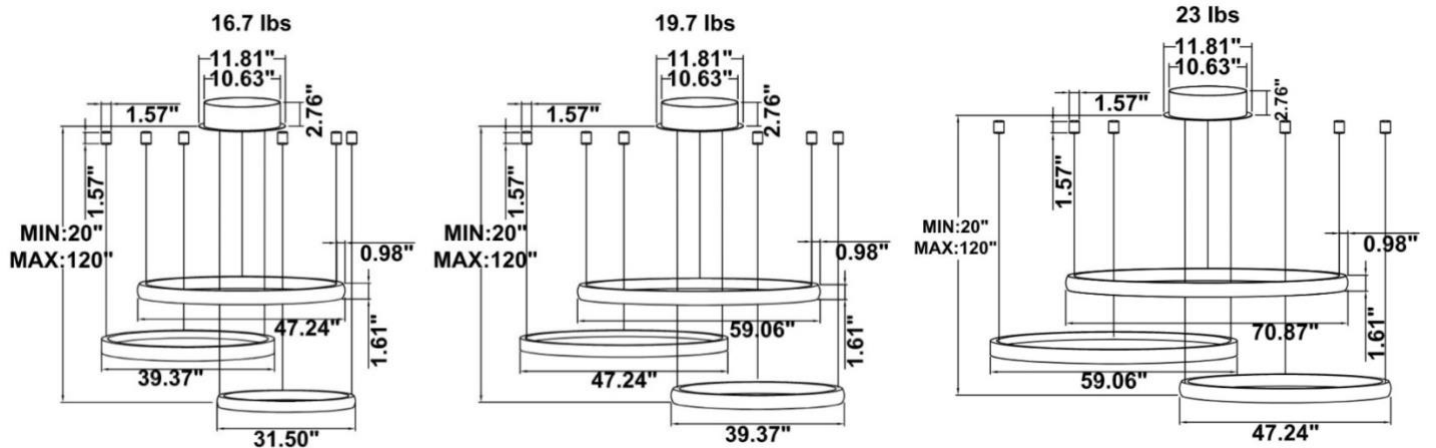


SB-S03L Canopy mount with accent ring, light inside.

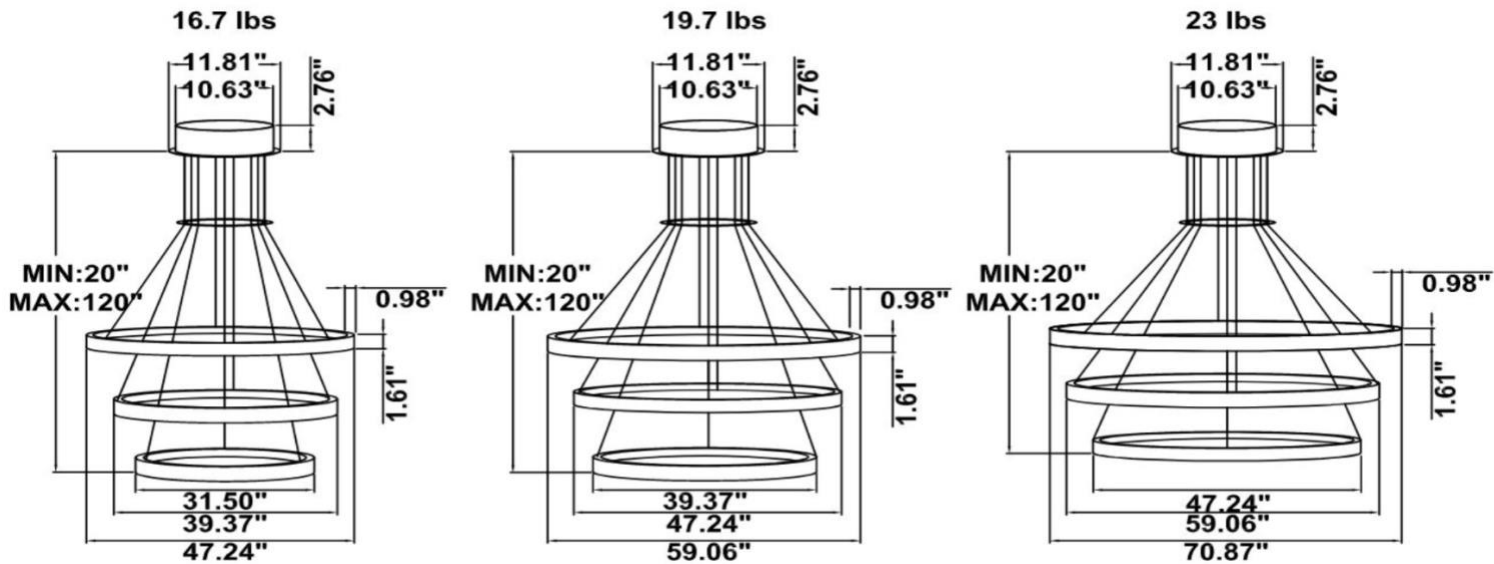


PHOTOMETRIC: Illumination outside the profile, light inside

SB-S01A40WZ 31.50" 40W @ 4000K

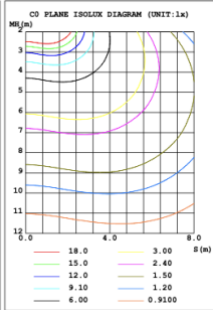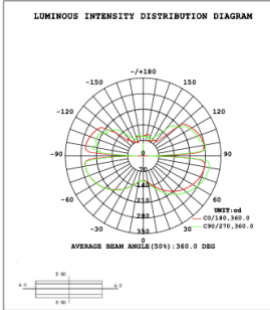



Flux out:1430 lm

Height	Eavg,Emax	Diameter
1m	0.0000,130.01lx	13170.39cm
2m	0.0000,32.491lx	26340.78cm
3m	0.0000,14.441lx	39511.17cm
4m	0.0000,8.1231lx	52681.56cm
5m	0.0000,5.1991lx	65851.95cm
6m	0.0000,3.6101lx	79022.34cm
7m	0.0000,2.6531lx	92192.73cm
8m	0.0000,2.0311lx	105363.12cm
9m	0.0000,1.6051lx	118533.51cm
10m	0.0000,1.3001lx	131703.90cm

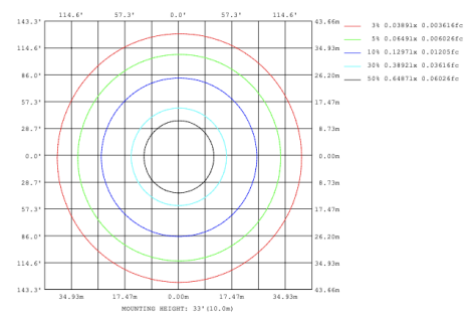


Angle:178.26deg
Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

SB-S01A50WZ 39.37" 50W @ 4000K

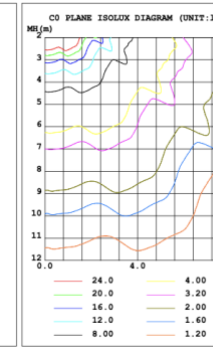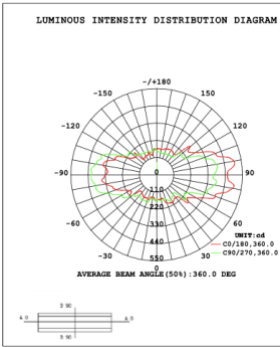



Flux out:319.0 lm

Height	Eavg,Emax	Diameter
1m	101.6,167.71lx	200.00cm
2m	25.39,41.941lx	400.00cm
3m	11.28,18.641lx	600.00cm
4m	6.347,10.481lx	800.00cm
5m	4.062,6.7101lx	1000.00cm
6m	2.821,4.6601lx	1200.00cm
7m	2.073,3.4231lx	1400.00cm
8m	1.587,2.6211lx	1600.00cm
9m	1.254,2.0711lx	1800.00cm
10m	1.016,1.6771lx	2000.00cm

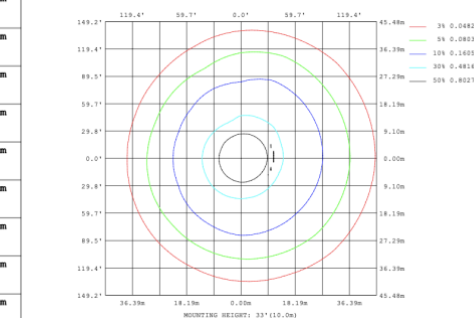


Angle:90.00deg

SB-S01A60WZ 47.24" 60W @ 4000K

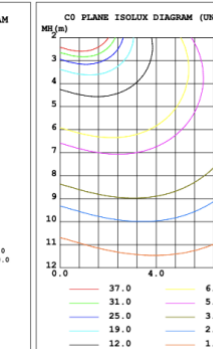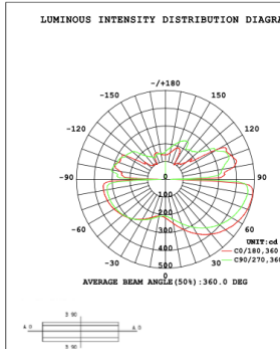




Flux out:2216 lm

Height	Eavg,Emax	Diameter
1m	0.0000,256.31lx	12591.48cm
2m	0.0000,64.071lx	25182.95cm
3m	0.0000,28.471lx	37774.43cm
4m	0.0000,16.021lx	50365.90cm
5m	0.0000,10.251lx	62957.38cm
6m	0.0000,7.1181lx	75548.85cm
7m	0.0000,5.2301lx	88140.33cm
8m	0.0000,4.0041lx	100731.80cm
9m	0.0000,3.1641lx	113323.28cm
10m	0.0000,2.5631lx	125914.75cm



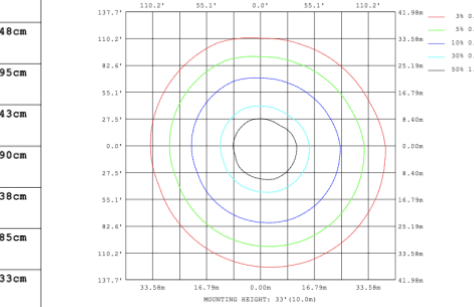


Angle:178.18deg

SB-S01A70WZ 59.06" 70W @ 4000K

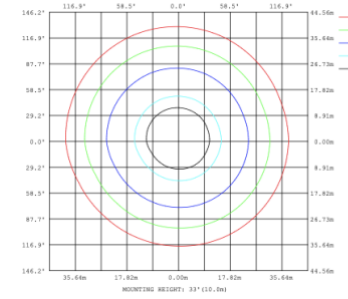
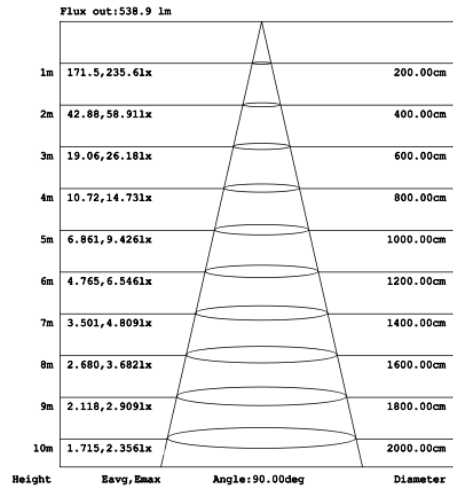
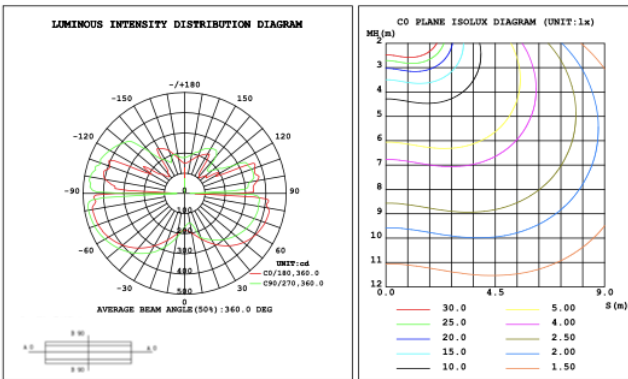


SB-S01A80WZ 70.87" 80W @ 4000K

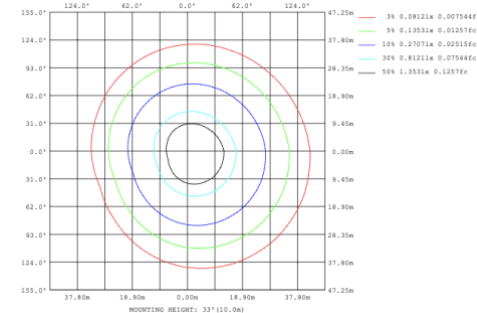
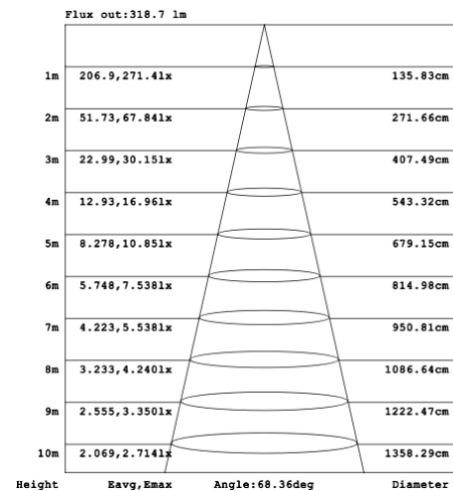
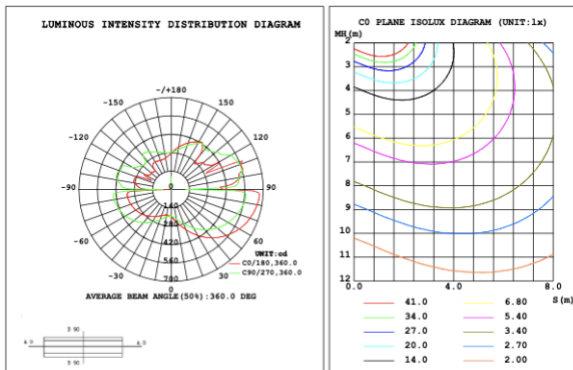


Illumination inside the profile, light outside




SB-S01B40WZ 31.50" 40W @ 4000K

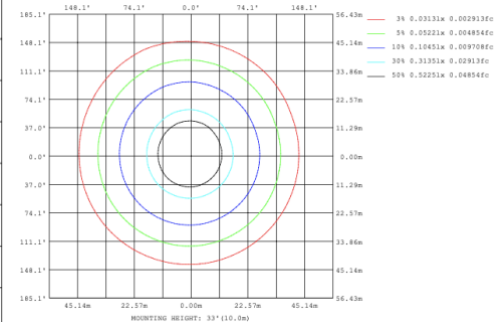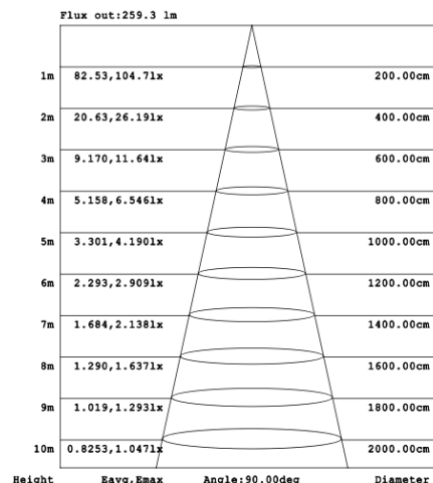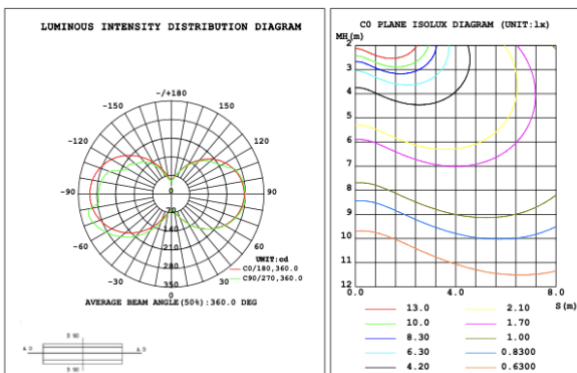




SB-S01B50WZ 39.37" 50W @ 4000K

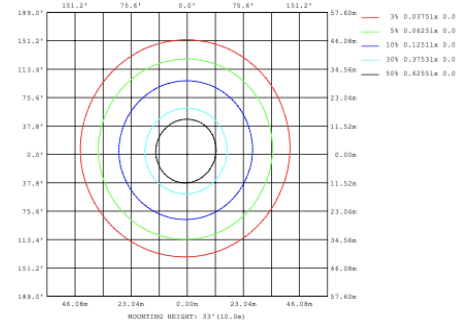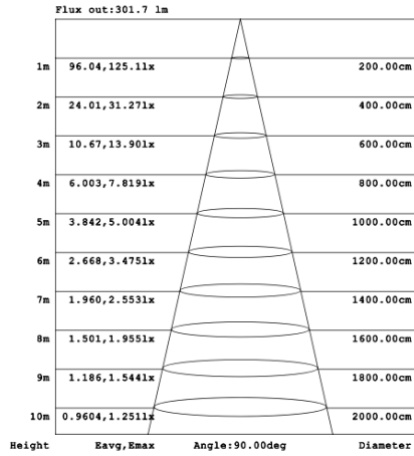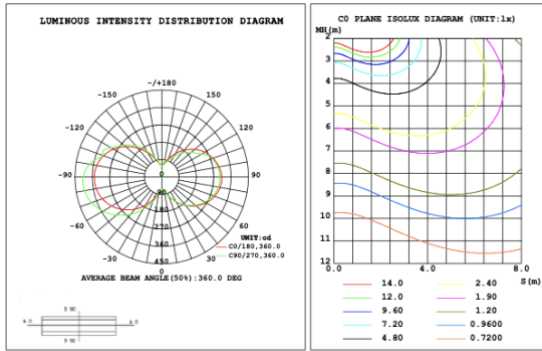



SB-S01B60WZ 47.24" 60W @ 4000K

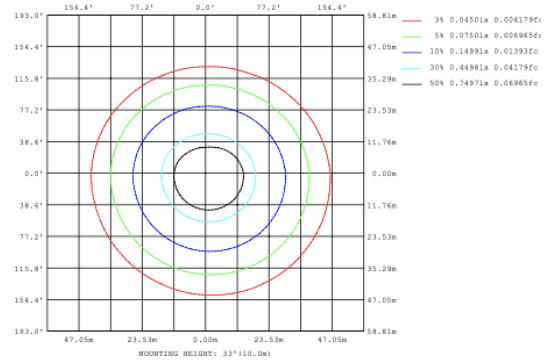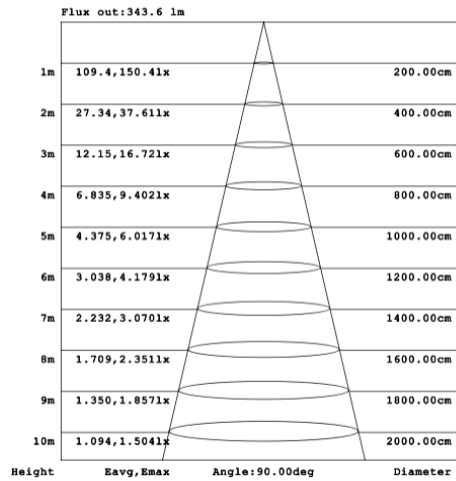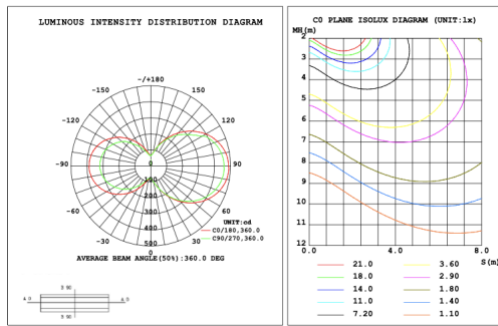

SB-S01B70WZ 59.06" 70W @ 4000K

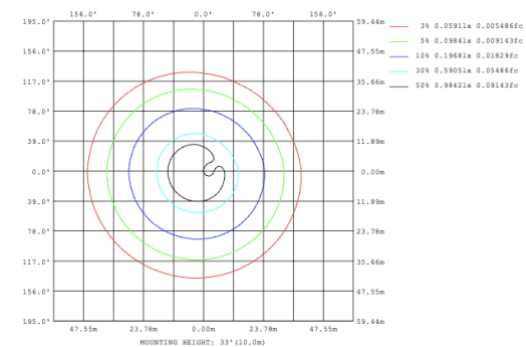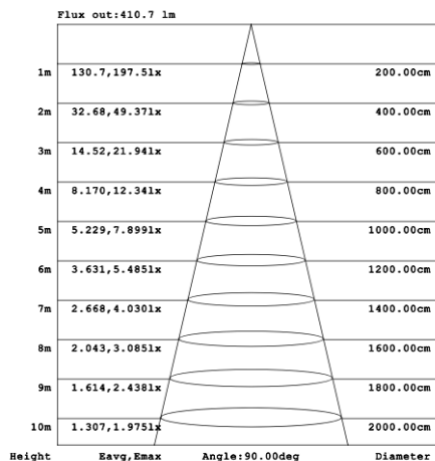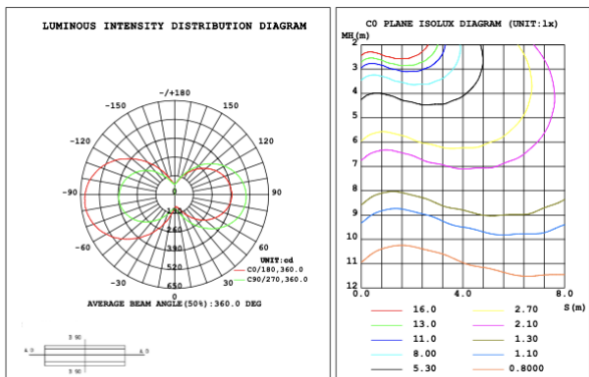

SB-S01B80WZ 70.87" 80W @ 4000K

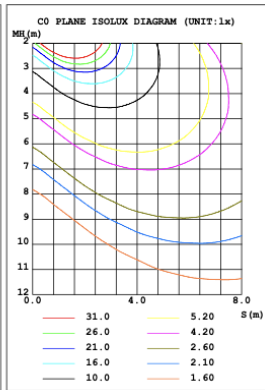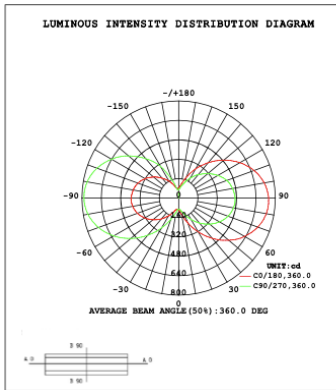

Flux out: 448.2 lm

Height	Eavg, Emax	Angle: 90.00deg	Diameter
1m	142.7, 208.3lx		200.00cm
2m	35.66, 52.07lx		400.00cm
3m	15.85, 23.14lx		600.00cm
4m	8.916, 13.02lx		800.00cm
5m	5.706, 8.331lx		1000.00cm
6m	3.963, 5.786lx		1200.00cm
7m	2.911, 4.251lx		1400.00cm
8m	2.229, 3.254lx		1600.00cm
9m	1.761, 2.571lx		1800.00cm
10m	1.427, 2.083lx		2000.00cm

