





Page: 1 of 11

Light Outside

Light Inside



View Kimberley 4 tier on website

View Video

View application photos

Kimberley 4 Tier

PRODUCT DESCRIPTION

Introducing the Kimberley Circular Lighting, a harmonious blend of modern design and functionality. Crafted from extruded aluminum with meticulously designed lenses, these luminaires offer options illumination inside or outside. Available in sizes ranging from 31.5" to 70.87", allowing for versatile configurations. With tunable white and RGBW options, select from over 6,500 powder-coated colors to set the perfect ambiance. Delivered fully assembled for your convenience.







- 5-year limited warranty.
- · Ships assembled.
- Illumination inside or outside the profile.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- Fixture lumens per watt ratio up to 75 LPW for illumination
- Can be remote driver mounted or driver concealed within the canopy, can be mounted on sloped ceiling.



SB-S04C



SB-S04D

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC, Dali, DMX, ZigBee available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K
 Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW,
 Tunable White available.






PARTS PACKED WITH STANDARD FIXTURE

- · Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch















Page: 2 of 11

Example: SB-S04A220WSB

MODEL INFORMATION:

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-S04A SB-S04B SB-S04C	*220W=59.06"+ 47.28"+ 39.37"+31.5"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector.	*Blank=1-10V dimming (default) C=Dali	*B=Black Jack	*Blank=10' foot 120" (default) 5'=5 foot 60"
SB-S04D SB-S04E SB-S04F SB-S04G	250W=70.87"+59.06"+47.28"+39.37"	4000K factory color default set, CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	S=Platinum Silver	15'=15 foot 180"
SB-S04H SB-S04I SB-S04J SB-S04K		A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and	White O=Oil	20'=20 foot 240" 25'=25 foot 300"
-	uest specialty pricing for alternative temperatures, additional sizes,	default set. CRI 90 T=3K-4K Tunable White control by remote/wall control	Google Alexa voice. L=ELV / Triac dimming	Full Color Name or RAL number for Custom Colors, select from Color Collections	
customiza	ble configurations, specialty color riations in aircraft cable length, and available controls.	R3= RGB+3000K	See control options		
		R4=RGB+4000K	<u> </u>		

STANDARD COLOR FINISHES















Page: 3 of 11

Discover beyond our standard hues with over 6,500 <u>finishes and colors</u> available for your luminaire, including precise color matching, NFL team colors, and custom RAL finishes. Elevate your design with metallic, sparkle, or transparent textures for a touch of individuality. Explore our most popular selections below and contact our factory for personalized quotes.

You can request color swatches by emailing us at customerservice@snowball-inc.com
Please note: Colors may appear differently due to screen display settings.



SOLID TONE FINISH



SHIMMER/ GLITTER FINISH





CHROME/SPECIALTY FINISH

Palleon Panther



SPARKLE FINISH



WETSTONE WRINKLED TEXTURE FINISH









Page: 4 of 11

LUMEN OUTPUT

Model Number	Size	Wattage	Kevin Temp field selectable	Lumen
	59.06"+ 47.28"+ 39.37"+31.5"	220W	2700K/3500K/3500K 3000K/3500K/4000K	16500 lm
SB-S04A/B/C/D/E/F/G/H/I/J/K	70.87"+59.06"+ 47.28"+ 39.37"	250W	2700K/3500K/3500K 3000K/3500K/4000K	18750 lm

EMERGENCY BATTERY OPTIONS

SEE SPEC

PICTURE	MODEL NUMBER	DESCRIPTION	
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes	
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes	
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes	

RGBW/TUNABLE WHITE SMART CONTROL

SEE SPEC AND VIDEO

Get Smart

Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.









Page: 5 of 11

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"


SB-S04A Canopy mount with ring light inside.

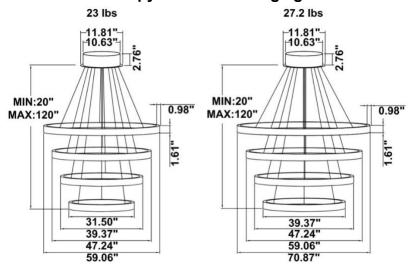

SB-S04B Canopy mount with ring light outside.

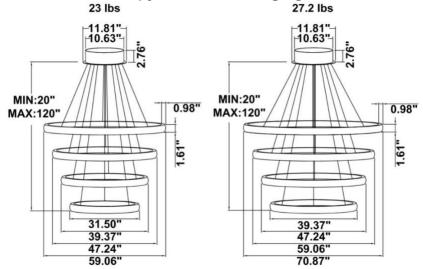

SB-S04C Canopy mount with swiveled rings, upper and lower lights inside, center lights outside.

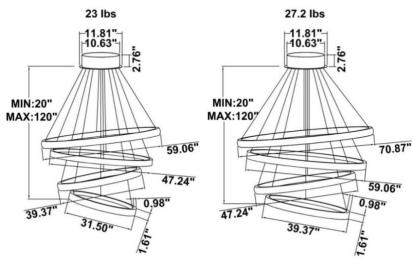










SB-S04D Remote mount with canopy, cables fixed directly to the ceiling, light inside.

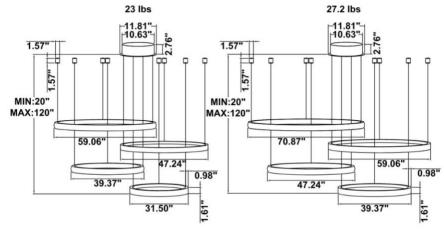

SB-S04E Canopy mount with upper and third ring light outside, second and last inside.

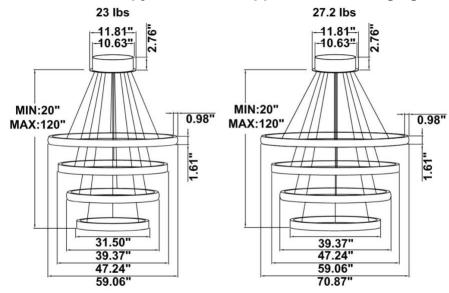

SB-S04F Canopy mount with accent ring, light inside.

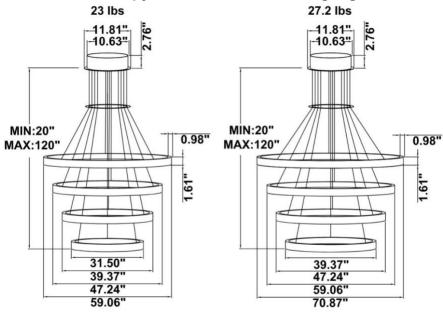









Page: 7 of 11


SB-S04G Canopy mount with accent ring, light outside.

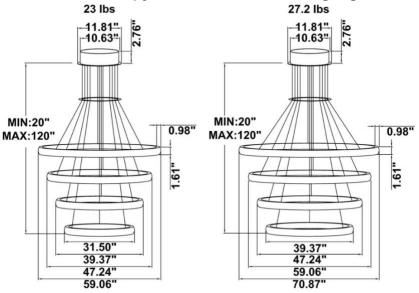

SB-S04H Canopy mount with swiveled rings, light inside.

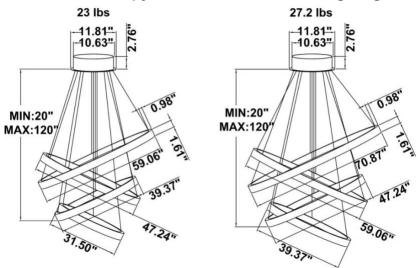

SB-S04l Canopy mount with swiveled rings, light outside.

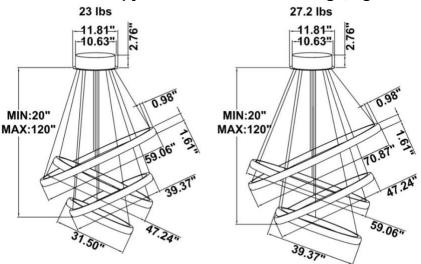









Page: 8 of 11

SB-S04J Remote mount with canopy, cables fixed directly to the ceiling, light outside.

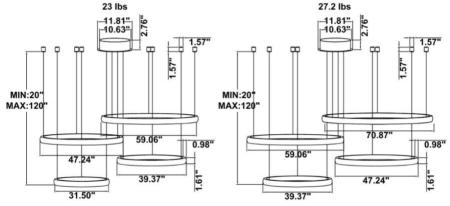



SB-S04K Remote driver with cables fixed directly to the ceiling, light outside. (Driver box size: L10.83" X W3.78" X H1.81")

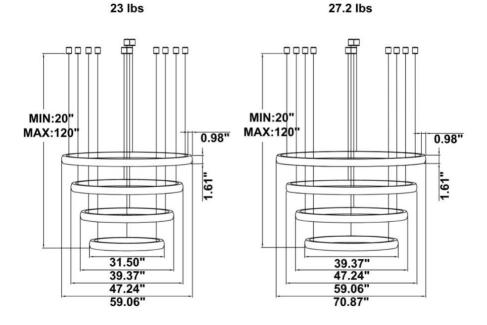


PHOTOMETRIC: Illumination outside the profile, light inside

SB-S01A40WZ 31.50" 40W @ 4000K








Height Eawg, Emax Angle:178.26deg Diameter Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance









SB-S01A50WZ 39.37" 50W @ 4000K










Page: 9 of 11


SB-S01A60WZ 47.24" 60W @ 4000K









SB-S01A70WZ 59.06" 70W @ 4000K

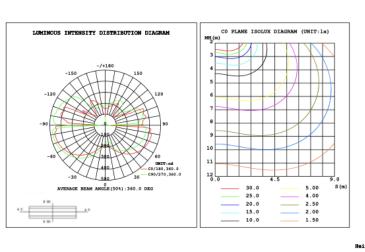














Page: 10 of 11

SB-S01A80WZ 70.87" 80W @ 4000K










Illumination inside the profile, light outside


SB-S01B40WZ 31.50" 40W @ 4000K









SB-S01B50WZ 39.37" 50W @ 4000K
















Page: 11 of 11


SB-S01B60WZ 47.24" 60W @ 4000K









SB-S01B70WZ 59.06" 70W @ 4000K







SB-S01B80WZ 70.87" 80W @ 4000K

