





Page: 1 of 11 View application photos

View Sapporo 2 tier website

Sapporo 2 Tier PRODUCT DESCRIPTION





Introducing the Sapporo Custom Modern Creative Luxury Tassel Aluminum Chain LED Ceiling Hanging Pendant Light—a stunning blend of contemporary design and functional elegance. Crafted with meticulous attention to detail, each pendant features a grand cascade of aluminum chains, creating a striking focal point in any space. Available in dimensions ranging from 15.75" to 70.87" and offering over 6,500 powder-coated color options, the Sapporo pendant is perfect for illuminating dining rooms, foyers, wedding halls, hotels, or living rooms with style and sophistication, infusing your space with ambient lighting and timeless allure. Shipped fully assembled for convenience. **FEATURES** 

- 5-year limited warranty.
- · Ships assembled.
- Illumination direct.
- Aluminum body, Aluminum chain, metal driver canopy.
- Fixture delivered lumens per watt ratio up to 60 LPW, not including RGBW.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.
- Can be remote driver mounted or driver concealed within the canopy, can be mounted on sloped ceiling.
- Over 50 lbs fixture must be installed using a U.L. listed outlet box or supported independently of the outlet box

## SPECIFICATIONS


- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC, Dali, DMX, ZigBee available.
- UL listed, suitable for dry location.(BAA) Buy American Compliant.
- Gloss White, Black Jack, Platinum Silver, Oil bronze, Rose Gold, Brassy Gold, and Red color finish as standard, 6,500 custom colors are available.
- Built in color temperature selectable. Choose from 2700K/3500K/4000K ; 3000K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW,

Tunable White available. PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch



GLACIER is an architectural and decorative division of SNOWBALL INC.





SB-D202E



SB-D202D

SB-D202F







Page: 2 of 11

# **MODEL INFORMATION:**

### Example: SB-D202A50WSSS

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls ( don't select this column if selected S or A)	"Z" Canopy/ Profile Finishes	"Y" Chain Finishes	"X" Aircraft Cable
	50W= 23.62"+15.75"	*S=3000K/3500K/4000 K Color Select by internal CCT Color	*Blank=1-10V dimming (default)	*S= Platinum Silver (Standard)	*S= Platinum Silver (Standard)	*Blank=10' feet 120"(default)
	70W= 31.50"+23.62"	Selector, 4000K factory color default set, CRI 90	L=ELV / Triac dimming	B= Black Jack (Standard)	B= Pearl Black	5'=5 feet 60"
*SB-D202A SB-D202B	39.37"+31.50"	A=2700K/3500K/4000K Color Select by internal	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	W= Gloss White (Standard)	(Standard)	15'=15 feet 180"
SB-D202C SB-D202D 47.2 SB-D202E SB-D202F SB-D202G 59.0	110W= 47.24"+39.37"	CCT color Select by Internal CCT color Selector, 4000K factory color default set. CRI 90		O= Oil Rubbed Bronze (Standard)	R=Rose Gold (Recommended)	20'=20 feet 240"
	130W= 59.06"+47.24"	T=3K-4K Tunable White control by remote/wall control	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	RG=Rose Gold (Recommended)	BG= Brassy Gold (Recommended)	25'=25 feet 300"
	150W= 70.87"+59.06"	R3= RGB+3000K R4=RGB+4000K (standard)	C=Dali	BG= Brassy Gold (Recommended) R= Red (Recommended)	R= Red (Recommended)	30'=30 feet 360"
Please request specialty pricing for alternative Kelvin temperatures, additional sizes, customizable configurations, specialty color finishes, variations in aircraft cable length, and available controls.			See control options	Find page 3 for custom color options or select from website <u>Color Collections</u>		
COLOR FINISHES FOR PROFILE AND CANOPY:   ANDARD Iss White STANDARD Platinum Silver STANDARD Black Jack STANDARD Oil Rubbed Bronze Recommended Rose Gold Recommended Brassy Gold Recommended Red						

# COLOR FINISHES FOR ALUMINIUM CHAIN:



GLACIER is an architectural and decorative division of SNOWBALL INC.







Discover beyond our standard hues with over 6,500 <u>finishes and colors</u> available for your luminaire, including precise color matching, NFL team colors, and custom RAL finishes. Elevate your design with metallic, sparkle, or transparent textures for a touch of individuality. Explore our most popular selections below and contact our factory for personalized quotes.

You can request color swatches by emailing us at <u>customerservice@snowball-inc.com</u> Please note: Colors may appear differently due to screen display settings.



#### SOLID TONE FINISH



#### SHIMMER/ GLITTER FINISH



### PALLEON METALLIC TEXTURED FINISH





#### **CHROME/SPECIALTY FINISH**

UMS-10671 Super Chrome Plus	PPB-6677 Black Chrome III	PMB-4124 Bronze Chrome	UMB-10813 Rose Chrome	UMB-10815 Brass Chrome	UMB-10816 Copper Chrome
PPS-6530	PPB-2262	PPB-8034	PPB-6325	PPB-5633	PPB-5936
Brassy Gold	Anodized Gold	Melted Bronze	Metallic Clear	Tinted Clear	Anodized Red

#### SPARKLE FINISH



#### WETSTONE WRINKLED TEXTURE FINISH







## LUMEN OUTPUT

Model Number	Size	Wattage	Kevin Temp field Selectable	Delivered Lumen
	23.62"+15.75"	50W	2700K/3500K/3500K 3000K/3500K/4000K	3000 lm
SB-D202A	31.50"+23.62"	70W	2700K/3500K/3500K 3000K/3500K/4000K	4200 lm
SB-D202B SB-D202C SB-D202D	39.37"+31.50"	90W	2700K/3500K/3500K 3000K/3500K/4000K	5400 lm
SB-D202D SB-D202E SB-D202F	47.24"+39.37"	110W	2700K/3500K/3500K 3000K/3500K/4000K	6600 lm
SB-D202F SB-D202G	59.06"+47.24"	130W	2700K/3500K/3500K 3000K/3500K/4000K	7800 lm
	70.87"+59.06"	150W	2700K/3500K/3500K 3000K/3500K/4000K	9000 lm

## **EMERGENCY BATTERY OPTIONS**

# SEE SPEC

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
No. of the second secon	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

# **RGBW/TUNABLE WHITE SMART CONTROL**


## SEE SPEC AND VIDEO

### **Get Smart**

Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

## DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"


## SB-D202A Canopy mount with direct lighting.

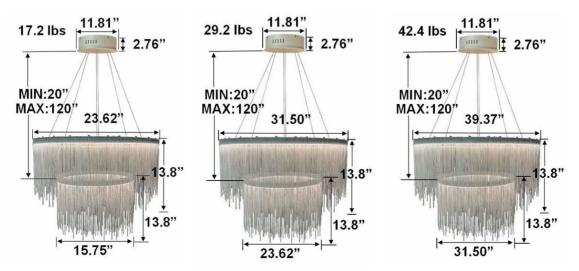






# SB-D202A Canopy mount with direct lighting.

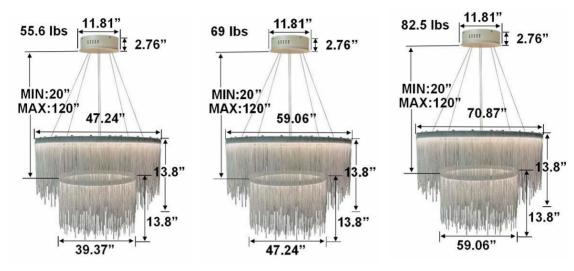




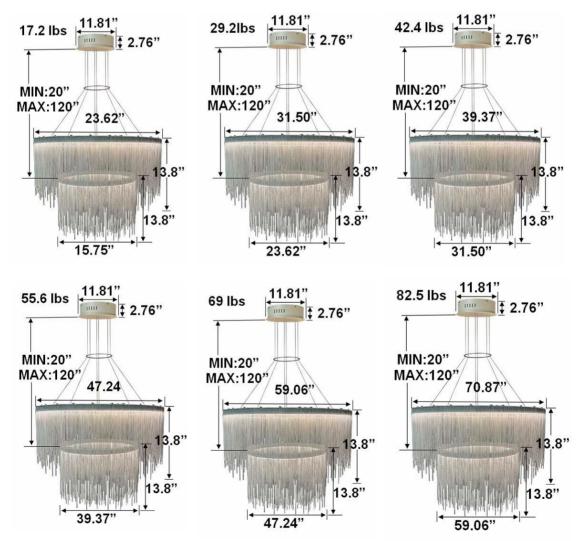






SB-D202C Remote driver with cables fixed directly to the ceiling, direct lighting. (Driver box size: L10.83" X W3.78" X H1.81")

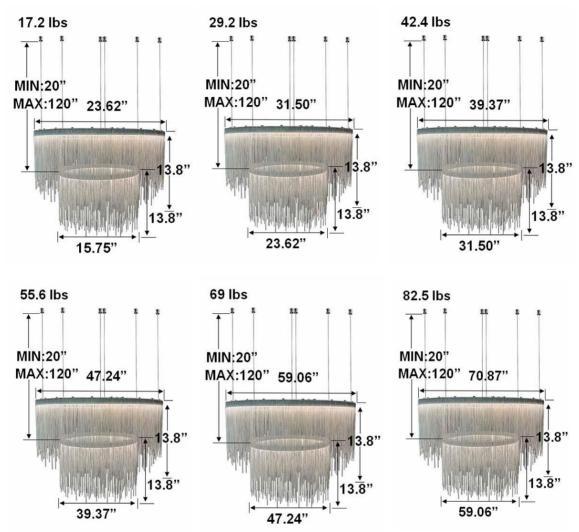

SB-D202D

Canopy mount with swiveled rings, direct lighting.

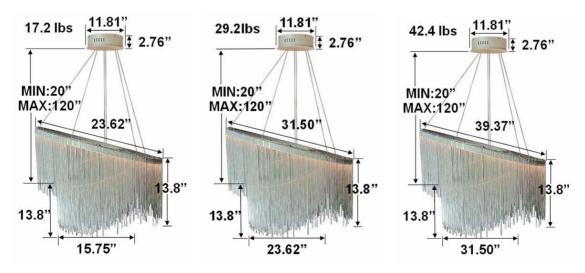









## SB-D202D Canopy mount with swiveled rings, direct lighting.

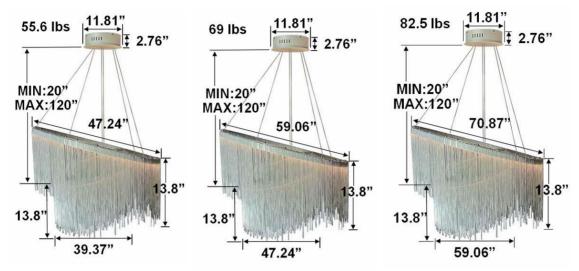


SB-D202E Remote mount with canopy, cables fixed directly to the ceiling, light outside.

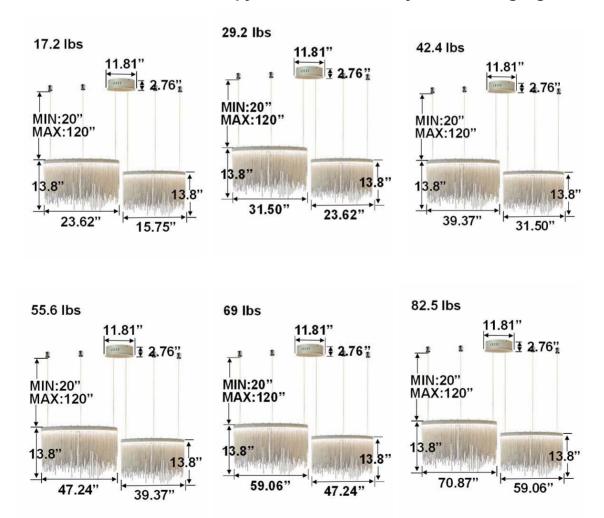






## SB-D202F Canopy mount with accent ring and swiveled rings, direct lighting.

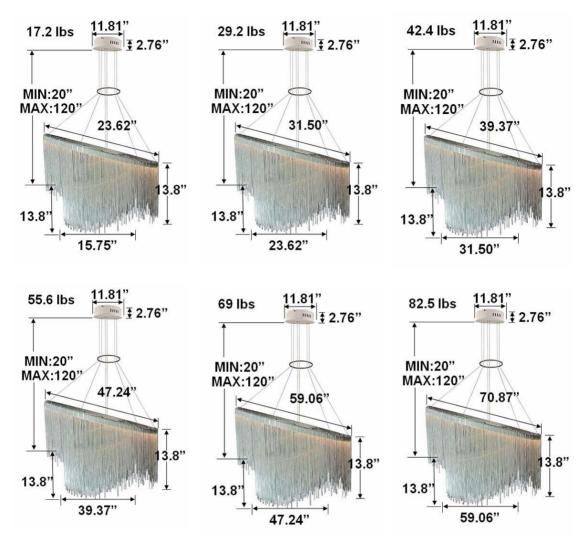


SB-D202G Canopy mount with direct lighting.

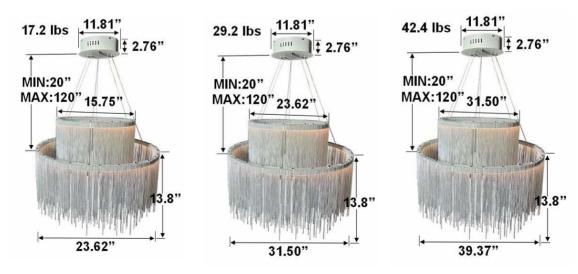





## SB-D202G Canopy mount with direct lighting

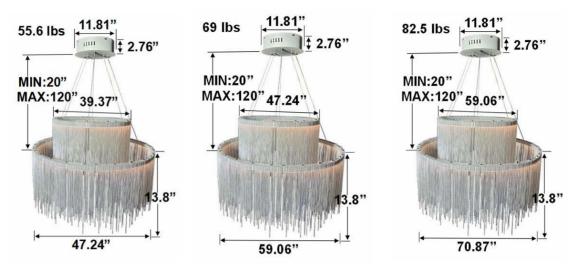

291.08cm

582.15cm

873.23cm

1164.30cm

1455.38cm

1746.46cm

2037.53cm



Flux out:583.3 lm

84.47.290.41x

21.12,72.601x

9.386,32.271x

5.279,18.151x

3.379,11.621x

2.346,8.0671x

1.724,5.9261x

1m

2m


3m

4m


5m


6m

# SB-D202A20WSSS 15.75" 20W @ 4000K





# 23.62" 30W @ 4000K





Angle:110.42deg





10=

Height

1.428,4.8791x

Eavg, Emax

2878.88cm


Diameter









## 31.50" 40W @ 4000K










# 39.37" 50W @ 4000K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM








59.06" 70W @ 4000K

0 ELE (503) -113 6 DE

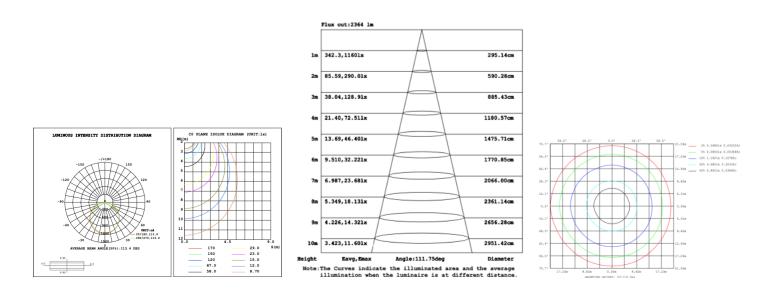

GLACIER is an architectural and decorative division of SNOWBALL INC.

CO PLANE ISOLUX DIAGRAM (UNIT:1x) MH(m)

3

9

10

11

12

120 98.0 78.0 59.0 39.0

20.0 16.0 9.80 7.80 5.90





Page: 11 of 11

# 70.87" 80W @ 4000K

