

Bromont 6 Tier

PRODUCT DESCRIPTION

Introducing the Bromont Direct/Indirect Circular Pendants: the epitome of versatile elegance and cutting-edge technology. Crafted from extruded aluminum with a direct housing and a glare-free flash lens, these pendants feature adjustable aircraft cables. Available in sizes from 15.57" to 70.87", they can be combined to create stunning multi-ring designs. Experience customizable lighting with tunable white and RGBW options, offered in over 6,500 powder-coated colors. Ships assembled for your convenience.

FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination direct/indirect.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- Lens: White frosted acrylic diffuser, Glare-free
- Fixture delivered lumens per watt ratio up to 82 LPW, 41 LPW direct, 41 LPW indirect, not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.
- Can be remote driver mounted or driver concealed within the canopy, can be mounted on sloped ceiling.
- Over 50 lbs fixture must be installed using a U.L. listed outlet box or supported independently of the outlet box

SPECIFICATIONS






- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC, Dali, DMX, ZigBee available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 2700K/3500K/4000K. Or 3000K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch



Selectable CCT

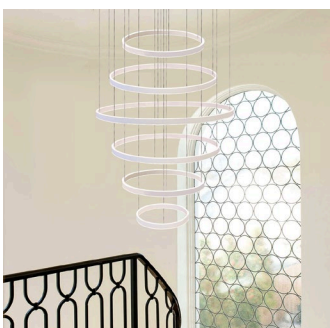
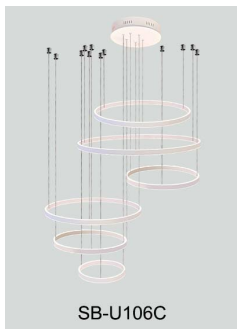
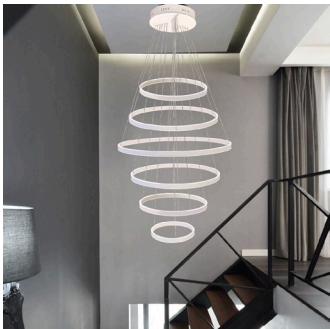
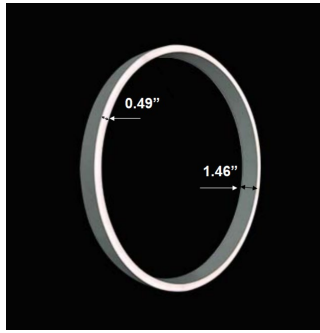


MODEL INFORMATION:

Example: SB-U106A270WSB

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-U106A	*270W=59.06"+47.24"+39.37" +31.50"+23.62"+15.57"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming (default)	*B=Black Jack	*Blank=10' foot 120" (default)
	280W=70.87"+59.06"+47.24" +39.37"+31.50"+23.62"		L=ELV / Triac dimming		5'=5 foot 60"
SB-U106B SB-U106D	270W=39.37"+47.24"+59.06" +47.24"+39.37"+23.62"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	S=Platinum Silver	15'=15 foot 180"
	320W=39.37"+47.24"+59.06" +47.24"+39.37"+31.50"				20'=20 foot 240"
	350W=47.24"+59.06"+70.87" +59.06"+47.24"+39.37"			W=Gloss White	25'=25 foot 300"
SB-U106C	270W=47.24"+59.06"+39.37" +47.24"+39.37"+23.62"	T=3K-4K Tunable White control by remote/wall control	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	O=Oil Rubbed Bronze	30'=30 foot 360"
	320W=59.06"+70.87"+47.24" +59.06"+47.24"+31.50"	R3= RGB+3000K			
	350W=59.06"+70.87"+47.24" +59.06"+47.24"+39.37"	R4=RGB+4000K	C=Dali		
<p>Please request specialty pricing for alternative Kelvin temperatures, additional sizes, customizable configurations, specialty color finishes, variations in aircraft cable length, and available controls.</p>			<p>See control options</p>	<p>Find page 3 for custom color options or select from website Color Collections</p>	

STANDARD COLOR FINISHES



Discover beyond our standard hues with over 6,500 [finishes and colors](#) available for your luminaire, including precise color matching, NFL team colors, and custom RAL finishes. Elevate your design with metallic, sparkle, or transparent textures for a touch of individuality. Explore our most popular selections below and contact our factory for personalized quotes.

You can request color swatches by emailing us at customerservice@snowball-inc.com

Please note: Colors may appear differently due to screen display settings.



SOLID TONE FINISH

PMB-4364 Pearl White	PMB-0593 Soft White	PSB-8051 Dirty White	PMB-0513 Silver Metallic II	PMB-6525 BMW Silver	HSS-1336 Silk Satin Black
PSS-0106 Ink Black	USS-2603 Gloss Black	UMB-0336 Metallic Bronze	UMB-0493 US Bronze	EMS-0940 Spanish Gold	PMB-0808 Performance Gold
PSS-4971 Very Red	PSS-2876 Orange Glow	PSS-1791 JuJu Orange	PSS-0118 Spring Yellow	PSB-5945 Bright Green	PMB-10657 Yama Blue
PPB-2846 Purple Glaze	PSS-1670 Rosette Pink	PSS-4008 Jewel Grey	PSS-4500 Crest Grey	PSS-4647 Beach Tan	PMB-5478 Montana Gold

SHIMMER/ GLITTER FINISH

PMB-5567 Champagne Shimmer	UMB-2062 Shimmer Gold	PMS-5677 Shimmer Copper	PMB-6611 Shimmer Black	PPB-8167 Trans Glitter Gold	PMB-6762 Alloy Glitter
--------------------------------------	---------------------------------	-----------------------------------	----------------------------------	---------------------------------------	----------------------------------

PALLEON METALLIC TEXTURED FINISH

PVB-10274 Palleon Paradise	PVB-10272 Palleon Fire	PVB-10271 Palleon Golden Green	PVB-10268 Dark Palleon Paradise	PVB-10267 Dark Palleon Golden Green	PVB-10268 Dark Palleon Fire
PVB-10273 Palleon Panther	PVB-10269 Dark Palleon Panther				

CHROME/SPECIALTY FINISH

UMS-10671 Super Chrome Plus	PPB-6677 Black Chrome III	PMB-4124 Bronze Chrome	UMB-10813 Rose Chrome	UMB-10815 Brass Chrome	UMB-10816 Copper Chrome
PPS-6530 Brassy Gold	PPB-2262 Anodized Gold	PPB-8034 Melted Bronze	PPB-6325 Metallic Clear	PPB-5633 Tinted Clear	PPB-5936 Anodized Red

SPARKLE FINISH

PPB-4694 Super Red Sparkle	PPB-4727 Silver Sparkle	PPB-5835 Rockstar Sparkle	PMB-4130 Pearl Sparkle	PPB-5004 Ultra Blue Sparkle	PPB-5078 Magnum Blue Sparkle
PMB-2750 Dark Grey Sparkle	PMB-6769 Deep Blue Sparkle	PPB-4499 Gold Sparkle	PMB-4417 Baby Blue Sparkle		

WETSTONE WRINKLED TEXTURE FINISH


PWB-2232 Wetstone Black	PWB-9157 Wetstone Gold Bronze	PWB-9156 Wetstone Copper	PWB-2343 Wetstone Rock Bronze	PWB-2590 Wetstone Emerald II
-----------------------------------	---	------------------------------------	---	--

LUMEN OUTPUT (for color selectable not RGBW)

Model Number	Size	Wattage	Kelvin Temp field Selectable ±500K	Delivered Lumen ±10%
SB-U106A	59.06"+47.24"+39.37"+31.50"+23.62"+15.57"	270W	2700K/3500K/4000K or 3000K/3500K/4000K	22140 lm
	70.87"+59.06"+47.24"+39.37"+31.50"+23.62"	280W	2700K/3500K/4000K or 3000K/3500K/4000K	22960 lm
SB-U106B/D	39.37"+47.24"+59.06"+47.24"+39.37"+23.62"	270W	2700K/3500K/4000K or 3000K/3500K/4000K	26240 lm
	39.37"+47.24"+59.06"+47.24"+39.37"+31.50"	320W	2700K/3500K/4000K or 3000K/3500K/4000K	27060 lm
	47.24"+59.06"+70.87"+59.06"+47.24"+39.37"	350W	2700K/3500K/4000K or 3000K/3500K/4000K	31980 lm
SB-U106C	47.24"+59.06"+39.37"+ 47.24"+39.37"+23.62"	270W	2700K/3500K/4000K or 3000K/3500K/4000K	26240 lm
	59.06"+70.87"+47.24"+59.06"+47.24"+31.50"	320W	2700K/3500K/4000K or 3000K/3500K/4000K	31160 lm
	59.06"+70.87"+47.24"+59.06"+47.24"+39.37"	350W	2700K/3500K/4000K or 3000K/3500K/4000K	31980 lm

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

Get Smart


Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"


SB-U106A Canopy mount with direct and indirect lighting.
26.8 lbs

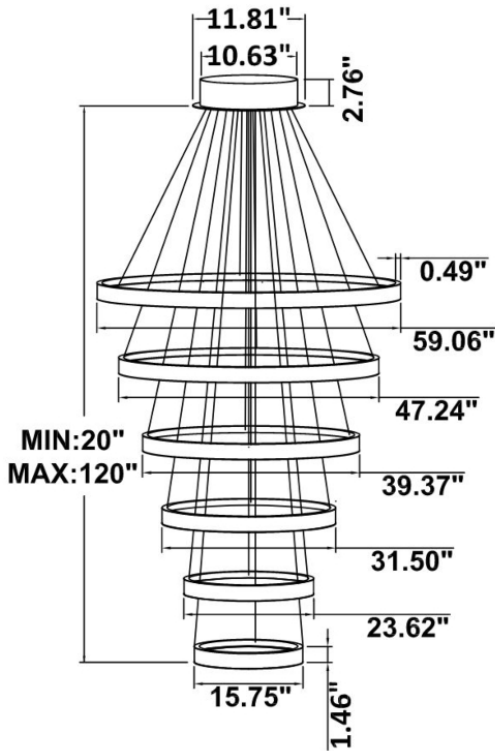


32.6 lbs

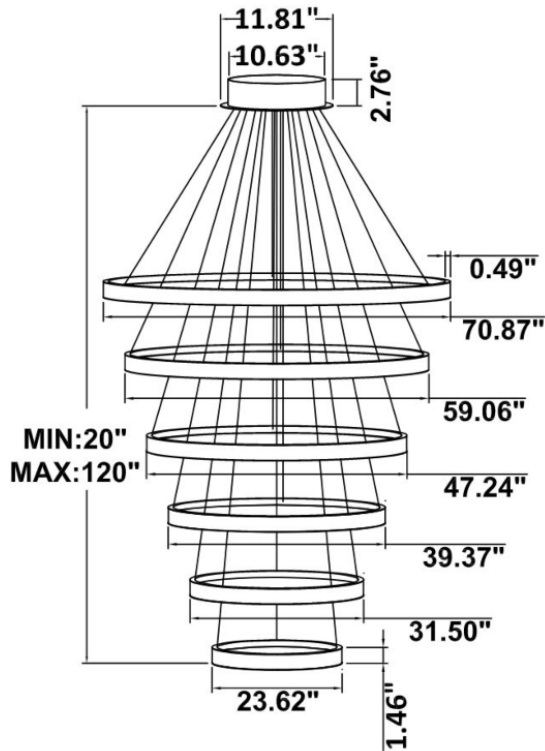


SB-U106B Canopy mount with direct and indirect lighting.
31 lbs

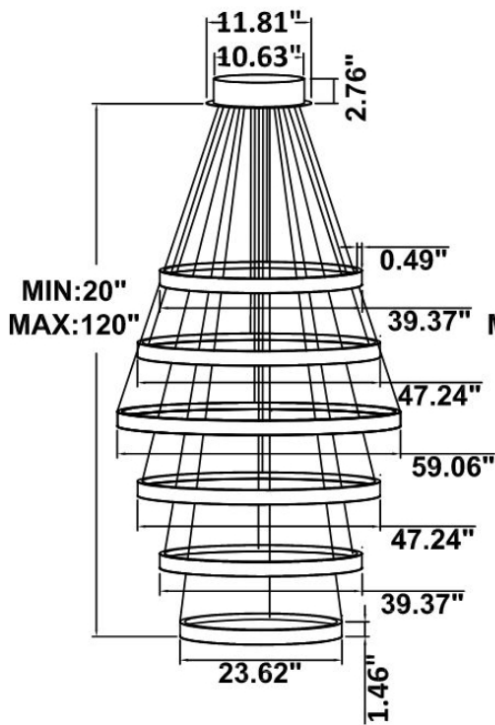


31.8 lbs

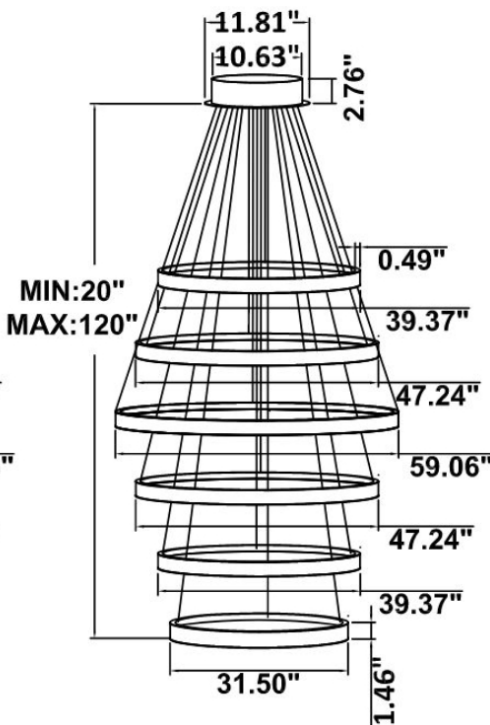


38 lbs

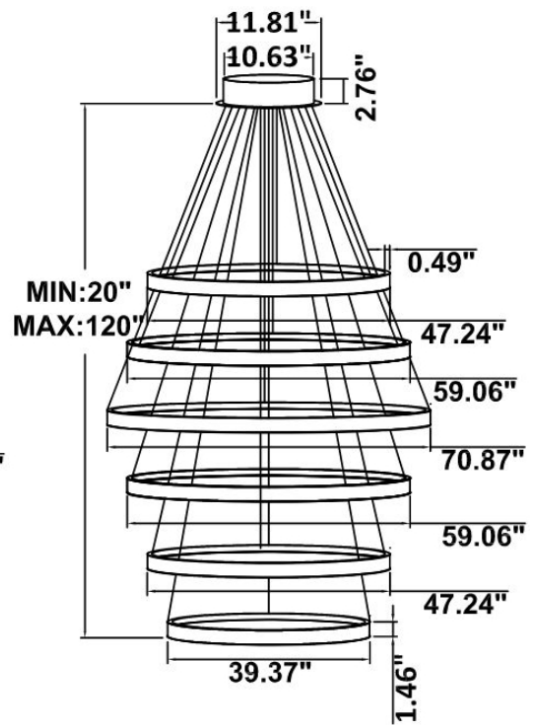

SB-U106C Remote mount with canopy, cables fixed directly to the ceiling, direct and indirect lighting.

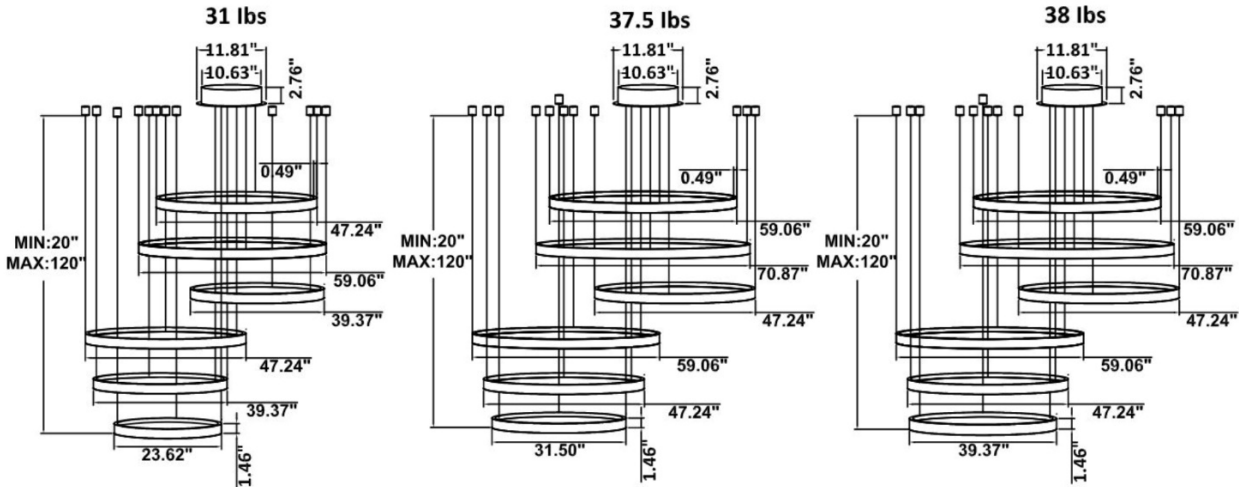


SB-U106D Remote driver with cables fixed directly to the ceiling, direct and indirect lighting. (Driver box size: L10.83" X W3.78" X H1.81")

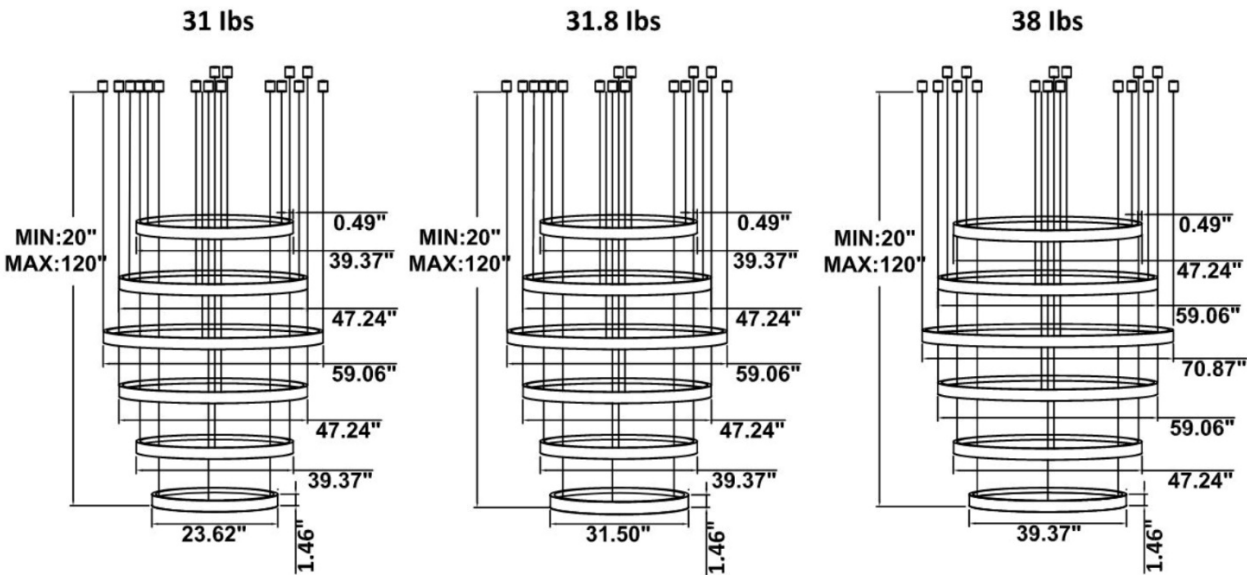


PHOTOMETRIC: Testing for single ring and direct only

15.75" 20W @ 4000K

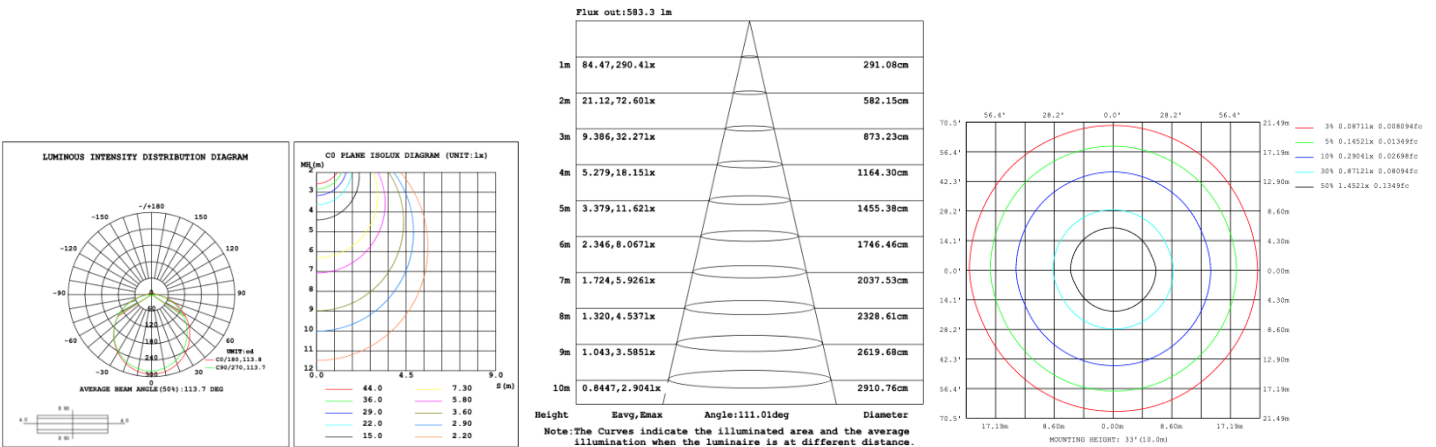


23.62" 30W @ 4000K

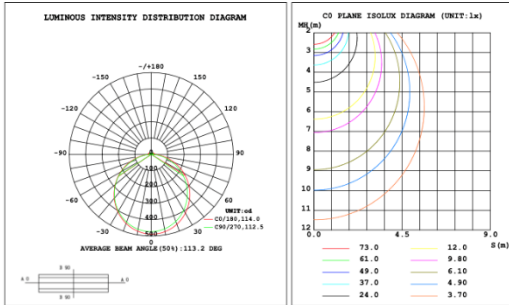


Flux out: 985.8 lm

Height	Eavg, Emax	Angle: 110.42deg	Diameter
1m	142.8, 487.9lx		287.89cm
2m	35.69, 122.0lx		575.78cm
3m	15.86, 54.22lx		863.66cm
4m	8.923, 30.50lx		1151.55cm
5m	5.711, 19.52lx		1439.44cm
6m	3.966, 13.55lx		1727.33cm
7m	2.914, 9.958lx		2015.22cm
8m	2.231, 7.624lx		2303.11cm
9m	1.763, 6.024lx		2590.99cm
10m	1.428, 4.879lx		2878.88cm

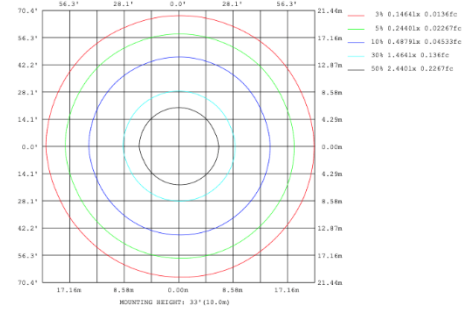


31.50" 40W @ 4000K

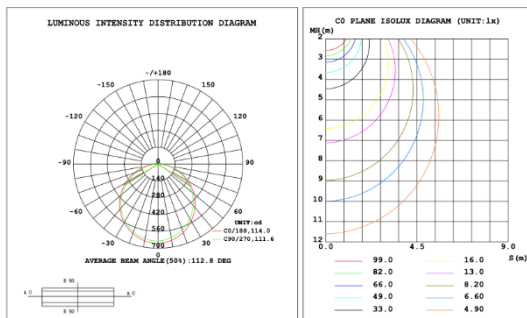


Flux out: 1299 lm

Height	Eavg, Emax	Angle: 109.69deg	Diameter
1m	202.7, 659.2lx		284.01cm
2m	50.69, 164.8lx		568.02cm
3m	22.53, 73.25lx		852.03cm
4m	12.67, 41.20lx		1136.04cm
5m	8.110, 26.37lx		1420.04cm
6m	5.632, 18.31lx		1704.05cm
7m	4.138, 13.45lx		1988.06cm
8m	3.168, 10.30lx		2272.07cm
9m	2.503, 8.139lx		2556.08cm
10m	2.027, 6.592lx		2840.09cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

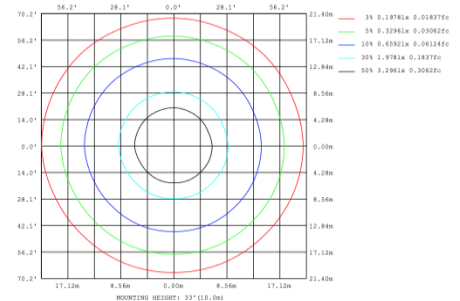


39.37" 50W @ 4000K

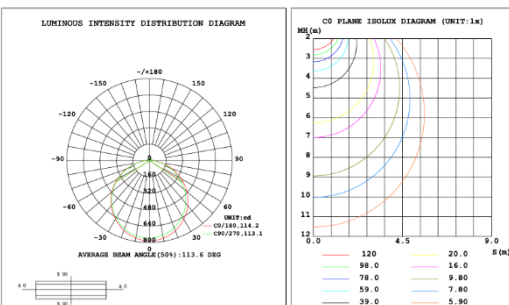




Flux out: 1584 lm

Height	Eavg, Emax	Angle: 110.84deg	Diameter
1m	229.3, 782.7lx		290.15cm
2m	57.33, 195.7lx		580.31cm
3m	25.48, 86.97lx		870.46cm
4m	14.33, 48.92lx		1160.61cm
5m	9.173, 31.31lx		1450.76cm
6m	6.370, 21.74lx		1740.92cm
7m	4.680, 15.97lx		2031.07cm
8m	3.583, 12.23lx		2321.22cm
9m	2.831, 9.663lx		2611.37cm
10m	2.293, 7.827lx		2901.53cm




Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

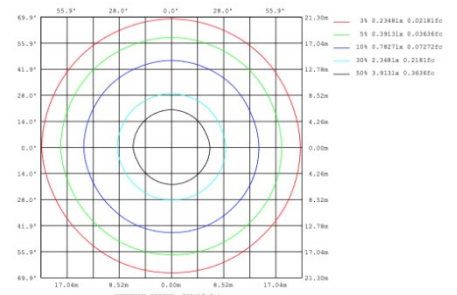

47.24" 60W @ 4000K

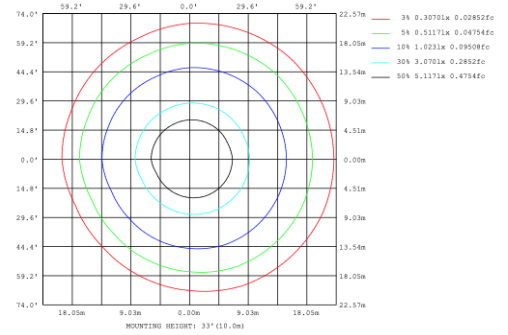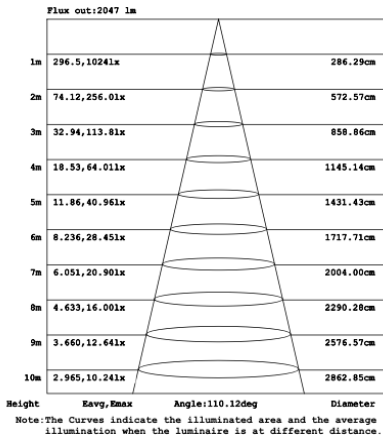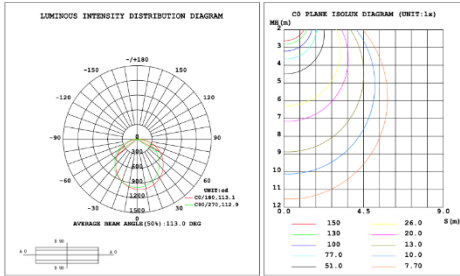

59.06" 70W @ 4000K

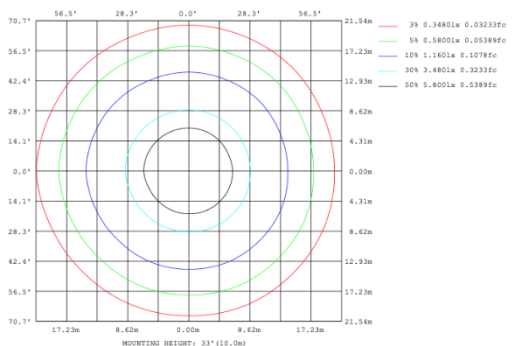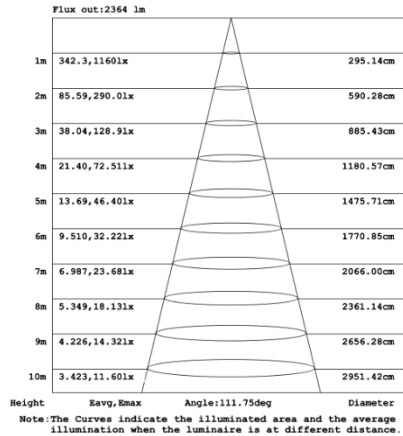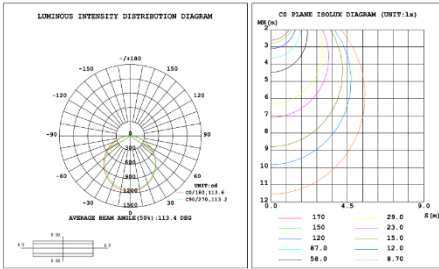

70.87" 80W @ 4000K

