



Light Outside

Light Inside

[View Kimberly 6 Tier on website](#)

[View Video](#)

[View application photos](#)

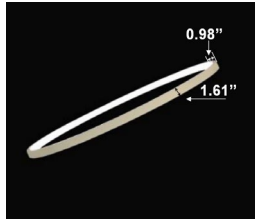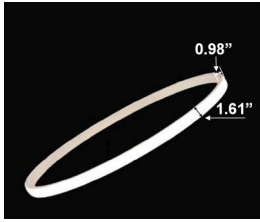

Kimberly 6 Tier PRODUCT DESCRIPTION

Introducing the Kimberly Circular Lighting, a harmonious blend of modern design and functionality. Crafted from extruded aluminum with meticulously designed lenses, these luminaires offer options illumination inside or outside. Available in sizes ranging from 31.5" to 70.87", allowing for versatile configurations. With tunable white and RGBW options, select from over 6,500 powder-coated colors to set the perfect ambiance. Delivered fully assembled for your convenience.

FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination inside or outside the profile.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- Fixture lumens per watt ratio up to 75 LPW for illumination.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.
- Can be remote driver mounted or driver concealed within the canopy, can be mounted on sloped ceiling.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC, Dali, DMX, ZigBee available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch



SB-S06A



SB-S06B



SB-S06C



SB-S06D




SB-S06E



SB-S06F



SB-S06G

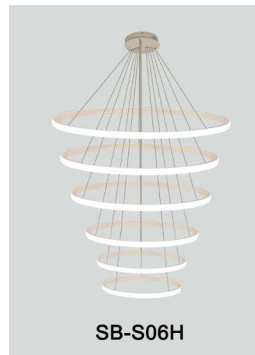




SB-S06H

MODEL INFORMATION:

Example: SB-S06A300WSB

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-S06A	*350W=70.87"+59.06"+70.87" +47.24"+39.37"+31.50"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming (default)	*B=Black Jack	*Blank=10' feet 120" (default)
SB-S06B	300W=47.24"+31.5"+47.24" +31.5"+47.24"+31.5"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	C=Dali	S=Platinum Silver	5'=5 feet 60"
	350W=59.06"+39.37"+59.06" +39.37"+59.06"+39.37"		D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	W=Gloss White	15'=15 feet 180" 20'=20 feet 240"
SB-S06 C/D/G/H	330W=70.87"+59.06"+47.27" +39.37"+31.50"+23.62"	T=3K-4K Tunable White control by remote/wall control	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	O=Oil Rubbed Bronze	25'=25 feet 300" 30'=30 foot 360"
		R3= RGB+3000K	L=ELV / Triac dimming		Full Color Name or RAL number for Custom Colors, select from Color Collections
SB-S06E	240W=23.62"+31.50"+39.37" +39.37"+31.50"+23.62"	R4=RGB+4000K			
SB-S06F	350W=47.27"+59.06"+70.87" +70.87"+59.06"+47.27"				
<p>Please request specialty pricing for alternative Kelvin temperatures, additional sizes, customizable configurations, specialty color finishes, variations in aircraft cable length, and available controls.</p>			See control options		

STANDARD COLOR FINISHES



Discover beyond our standard hues with over 6,500 [finishes and colors](#) available for your luminaire, including precise color matching, NFL team colors, and custom RAL finishes. Elevate your design with metallic, sparkle, or transparent textures for a touch of individuality. Explore our most popular selections below and contact our factory for personalized quotes.

You can request color swatches by emailing us at customerservice@snowball-inc.com

Please note: Colors may appear differently due to screen display settings.



SOLID TONE FINISH

PMB-4364 Pearl White	PMB-0593 Soft White	PSB-8051 Dirty White	PMB-0513 Silver Metallic II	PMB-6525 BMW Silver	HSS-1336 Silk Satin Black
PSS-0106 Ink Black	USS-2603 Gloss Black	UMB-0336 Metallic Bronze	UMB-0493 US Bronze	EMS-0940 Spanish Gold	PMB-0808 Performance Gold
PSS-4971 Very Red	PSS-2876 Orange Glow	PSS-1791 JuJu Orange	PSS-0118 Spring Yellow	PSB-5945 Bright Green	PMB-10657 Yama Blue
PPB-2846 Purple Glaze	PSS-1670 Rosette Pink	PSS-4008 Jewel Grey	PSS-4500 Crest Grey	PSS-4647 Beach Tan	PMB-5478 Montana Gold

SHIMMER/ GLITTER FINISH

PMB-5567 Champagne Shimmer	UMB-2062 Shimmer Gold	PMS-5677 Shimmer Copper	PMB-6611 Shimmer Black	PPB-8167 Trans Glitter Gold	PMB-6762 Alloy Glitter
--------------------------------------	---------------------------------	-----------------------------------	----------------------------------	---------------------------------------	----------------------------------

PALLEON METALLIC TEXTURED FINISH

PVB-10274 Palleon Paradise	PVB-10272 Palleon Fire	PVB-10271 Palleon Golden Green	PVB-10268 Dark Palleon Paradise	PVB-10267 Dark Palleon Golden Green	PVB-10268 Dark Palleon Fire
PVB-10273 Palleon Panther	PVB-10269 Dark Palleon Panther				

CHROME/SPECIALTY FINISH

UMS-10671 Super Chrome Plus	PPB-6677 Black Chrome III	PMB-4124 Bronze Chrome	UMB-10813 Rose Chrome	UMB-10815 Brass Chrome	UMB-10816 Copper Chrome
PSS-6530 Brassy Gold	PPB-2262 Anodized Gold	PPB-8034 Melted Bronze	PPB-6325 Metallic Clear	PPB-5633 Tinted Clear	PPB-5936 Anodized Red

SPARKLE FINISH

PPB-4694 Super Red Sparkle	PPB-4727 Silver Sparkle	PPB-5835 Rockstar Sparkle	PMB-4130 Pearl Sparkle	PPB-5004 Ultra Blue Sparkle	PPB-5078 Magnum Blue Sparkle
PMB-2750 Dark Grey Sparkle	PMB-6769 Deep Blue Sparkle	PPB-4499 Gold Sparkle	PMB-4417 Baby Blue Sparkle		

WETSTONE WRINKLED TEXTURE FINISH


PWB-2232 Wetstone Black	PWB-9157 Wetstone Gold Bronze	PWB-9156 Wetstone Copper	PWB-2343 Wetstone Rock Bronze	PWB-2590 Wetstone Emerald II
-----------------------------------	---	------------------------------------	---	--

LUMEN OUTPUT

Model Number	Size	Wattage	Kevin Temp field selectable	Lumen
SB-S06A	31.5"+39.37"+47.24"+70.87"+59.06"+70.87"	350W	2700K/3500K/3500K 3000K/3500K/4000K	28500 lm
SB-S06B	47.24"+31.5"+47.24"+31.5"+47.24"+ 31.5"	300W	2700K/3500K/3500K 3000K/3500K/4000K	22500 lm
	59.06"+39.37"+59.06"+39.37"+59.06"+ 39.37"	350W	2700K/3500K/3500K 3000K/3500K/4000K	27000 lm
SB-S06C/D/G/H	70.87"+59.06"+47.27"+39.37"+31.50"+23.62"	330W	2700K/3500K/3500K 3000K/3500K/4000K	24750 lm
SB-S06E/F	23.62"+31.50"+39.37"+39.37"+31.50"+23.62"	240W	2700K/3500K/3500K 3000K/3500K/4000K	18000 lm
	47.27"+59.06"+70.87"+70.87"+59.06"+47.27"	350W	2700K/3500K/3500K 3000K/3500K/4000K	31500 lm

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

RGBW/TUNABLE WHITE SMART CONTROL


[SEE SPEC AND VIDEO](#)

Get Smart



Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"


SB-S06A Canopy mount with 1st, 4th, and 6th ring light inside, 2nd, 3rd, and 5th light outside.
38.1 lbs

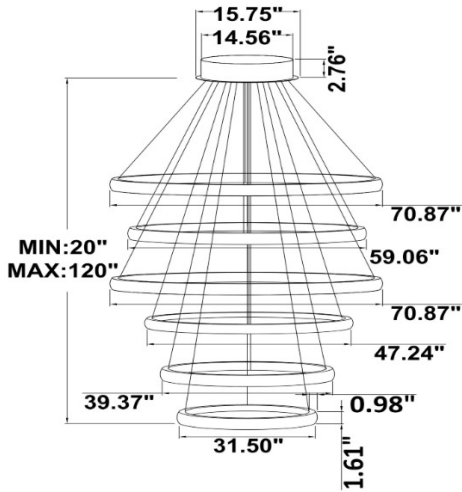


SB-S06B Remote mount with canopy, light outside.
29.5 lbs

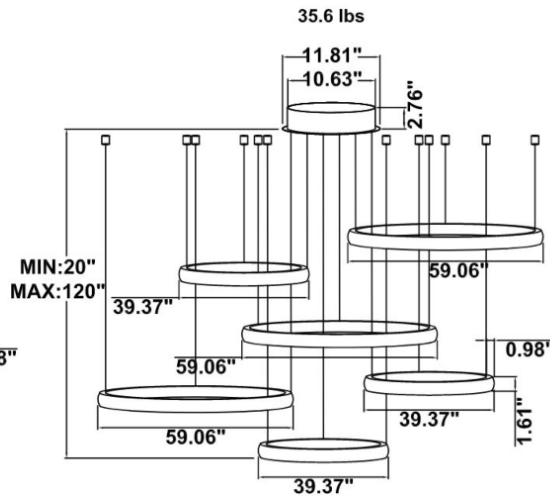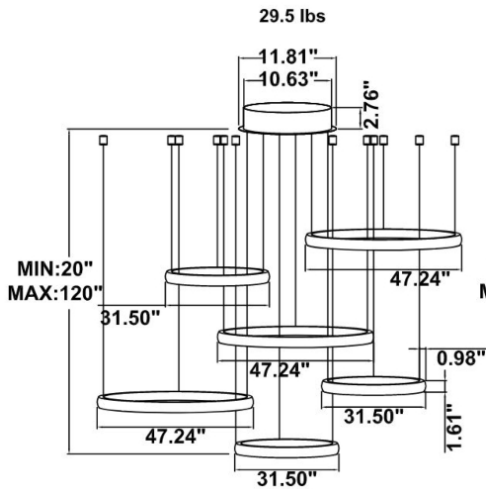


SB-S06C Canopy mount with swiveled rings, light inside.
33.6 lbs

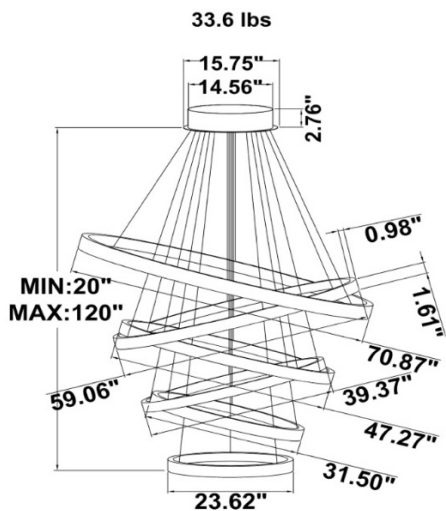


SB-S06D Canopy mount with swiveled rings, light outside.
33.6 lbs

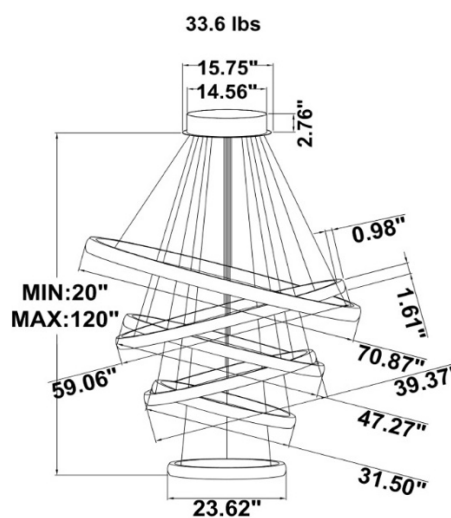


SB-S06E Remote mount with canopy, cables fixed directly to the ceiling, light inside.

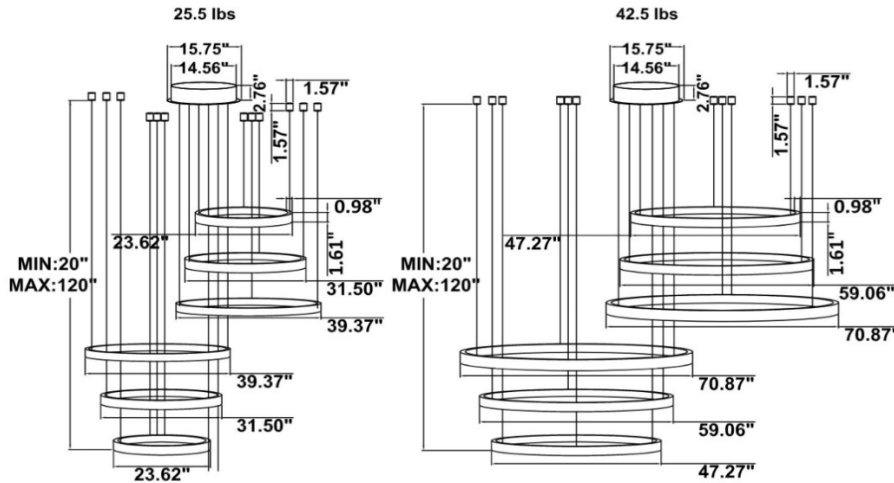


SB-S06F Remote mount with canopy, cables fixed directly to the ceiling, light outside.

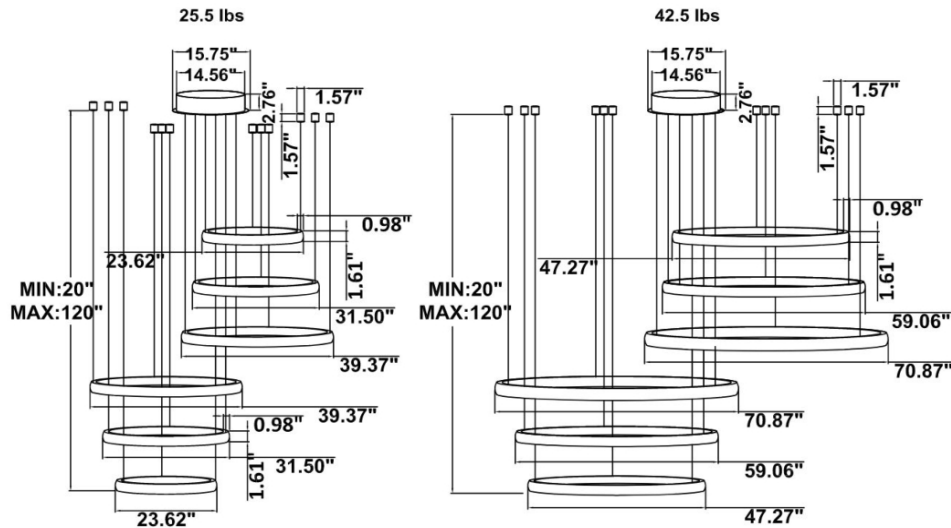

SB-S06G Canopy mount with ring light inside.




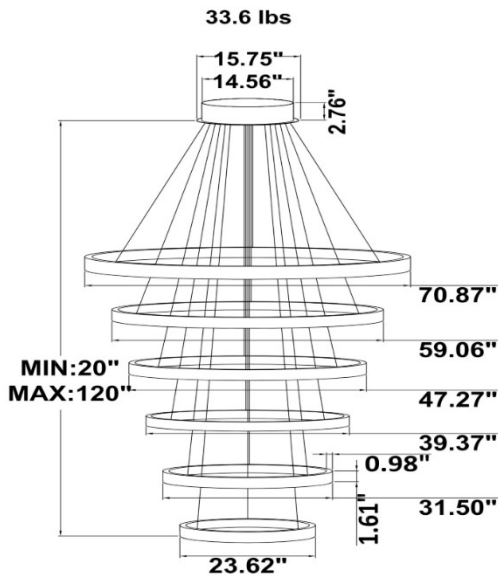


SB-S06H Canopy mount with ring light outside.

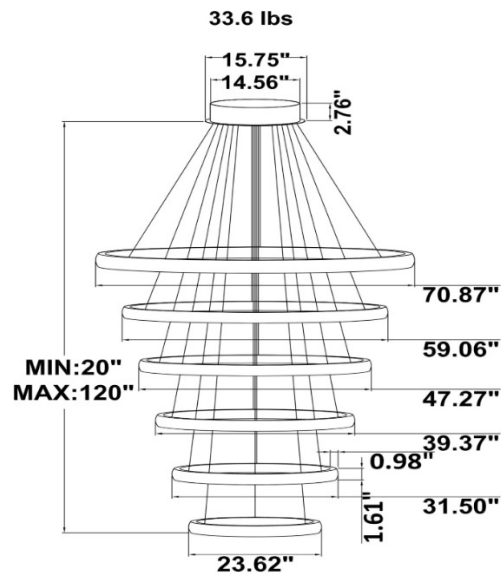





PHOTOMETRIC: Illumination outside the profile, light inside

SB-S01A40WZ 31.50" 40W @ 4000K

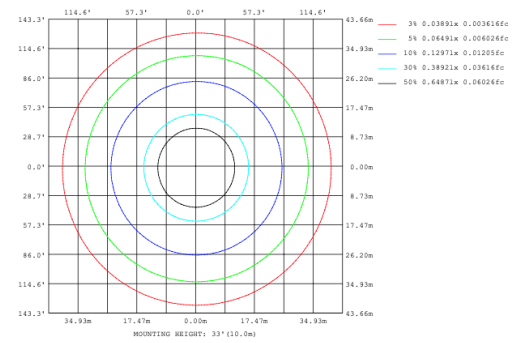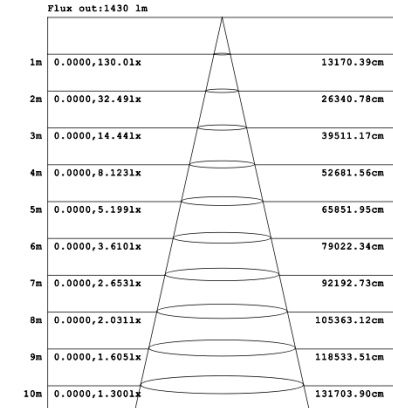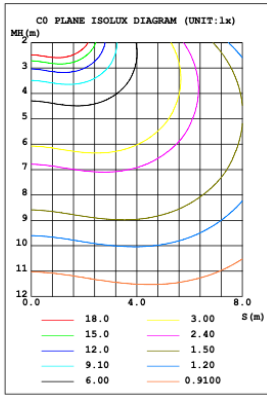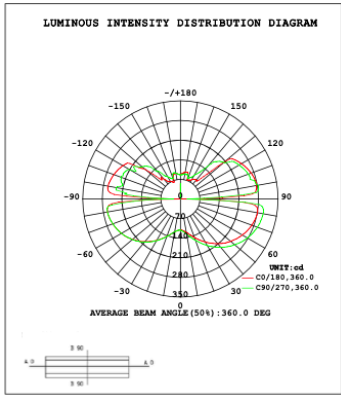





Height Avg, Emax Angle:178.26deg Diameter
Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

SB-S01A50WZ 39.37" 50W @ 4000K

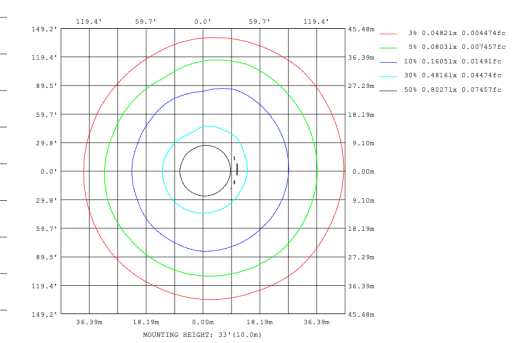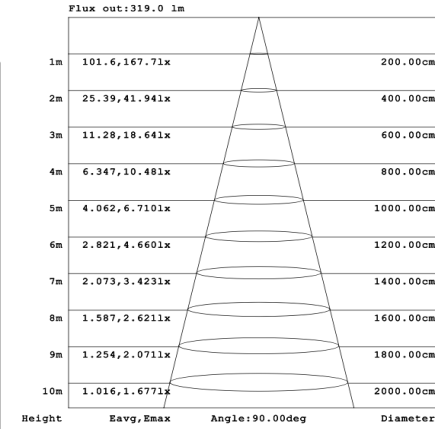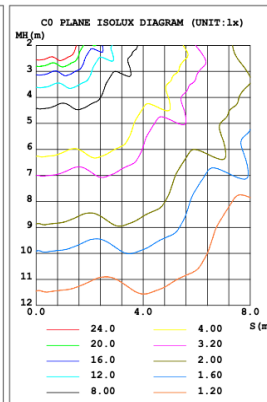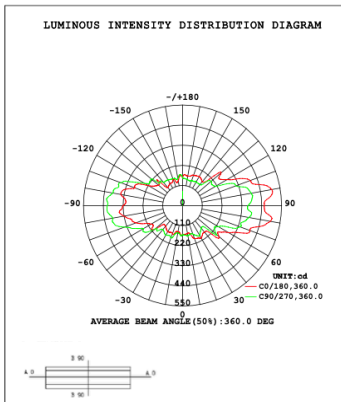





Height Avg, Emax Angle:90.00deg Diameter

SB-S01A60WZ 47.24" 60W @ 4000K

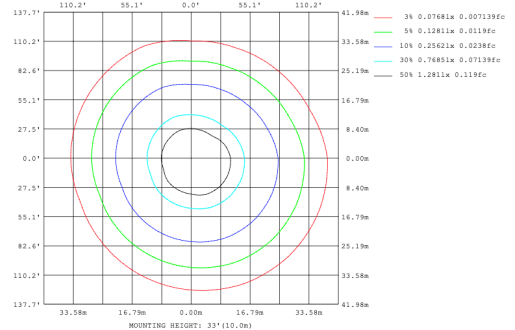
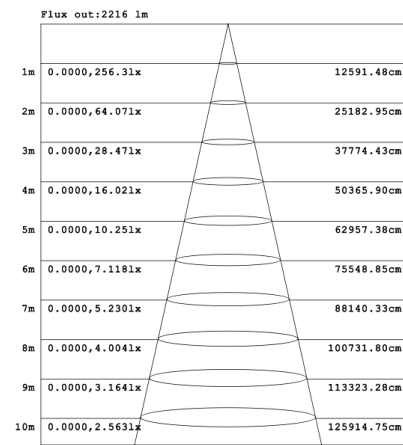
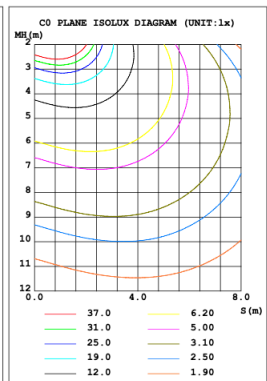
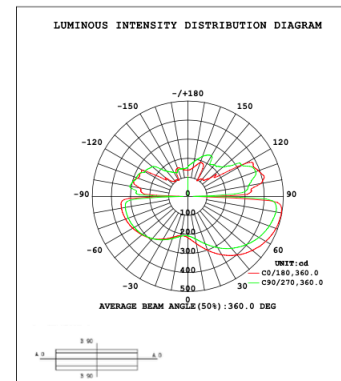


Height Avg, Emax Angle:178.18deg Diameter

SB-S01A70WZ 59.06" 70W @ 4000K

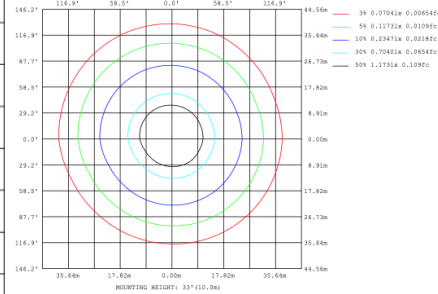
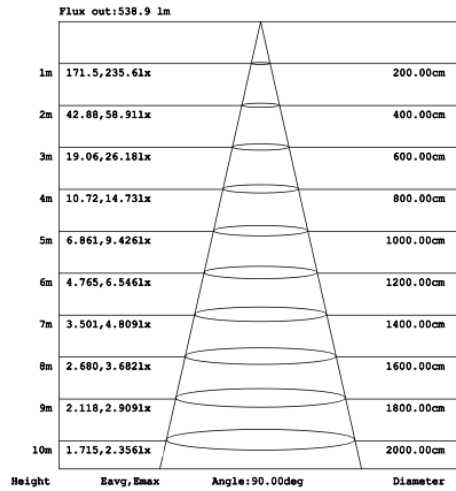
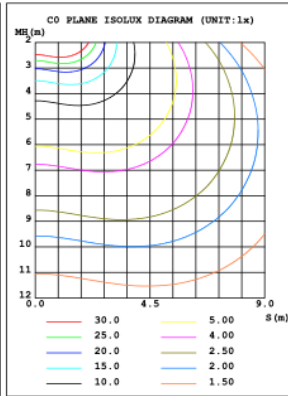
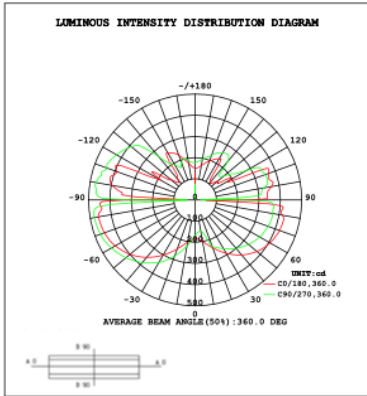


SB-S01A80WZ 70.87" 80W @ 4000K

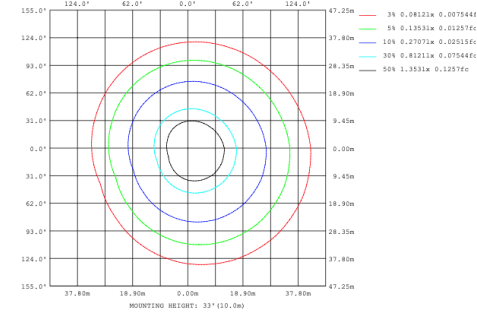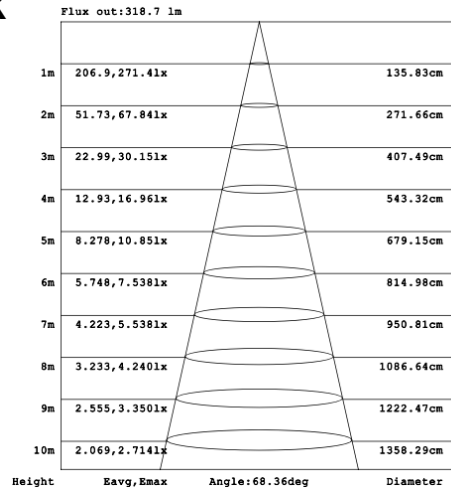
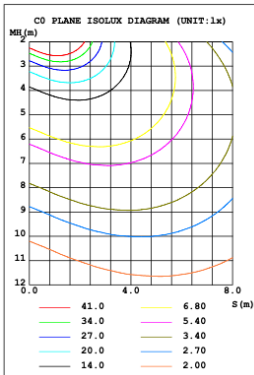
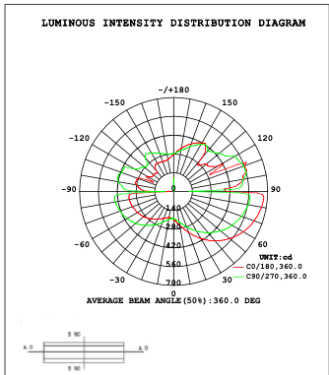


Illumination inside the profile, light outside




SB-S01B40WZ 31.50" 40W @ 4000K

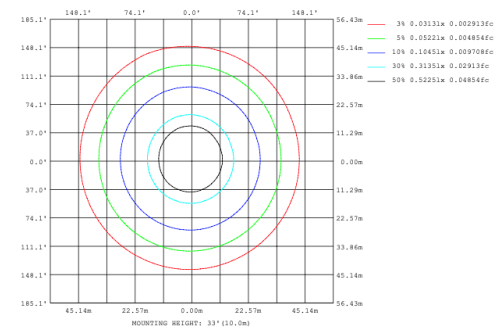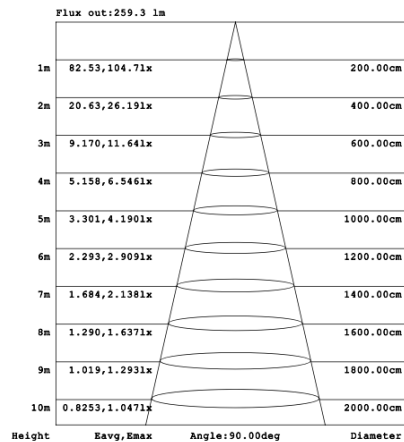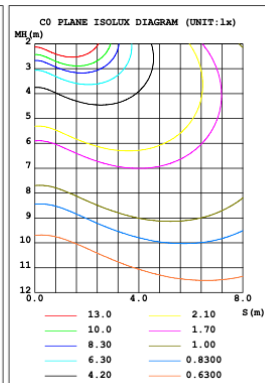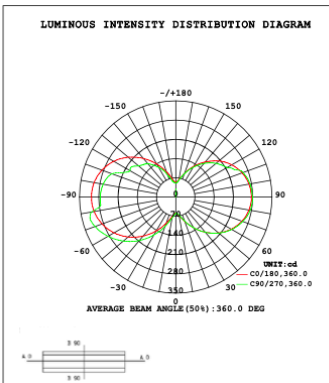




SB-S01B50WZ 39.37" 50W @ 4000K

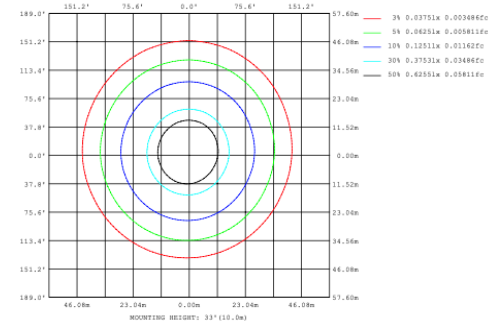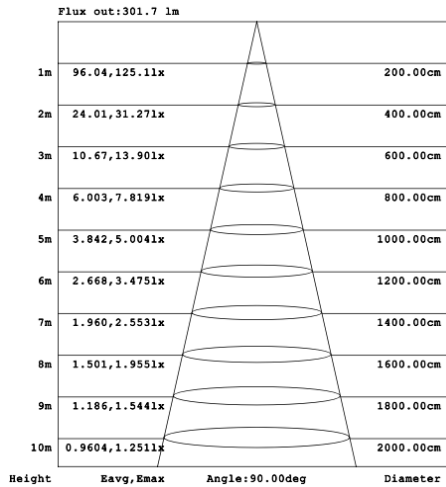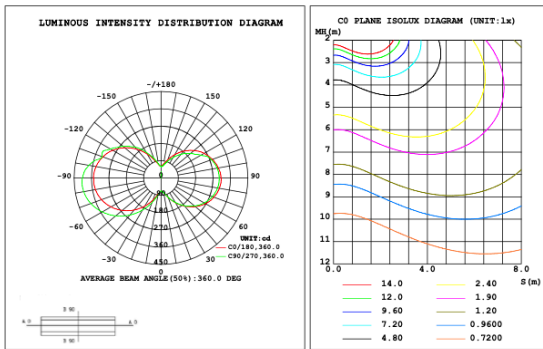

SB-S01B60WZ 47.24" 60W @ 4000K

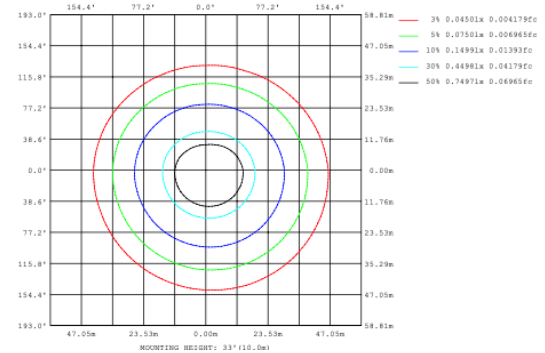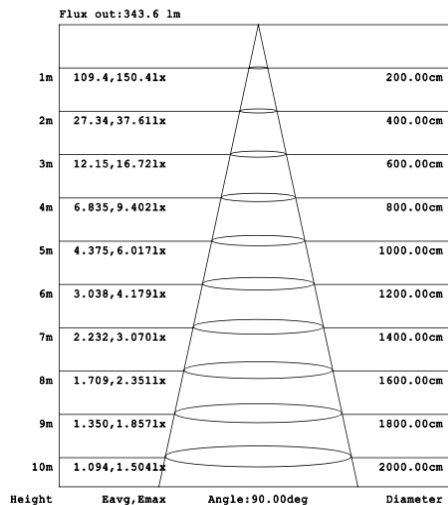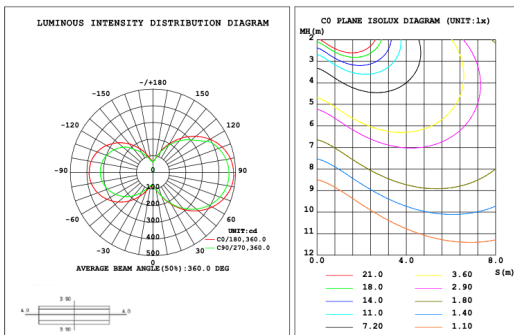

SB-S01B70WZ 59.06" 70W @ 4000K

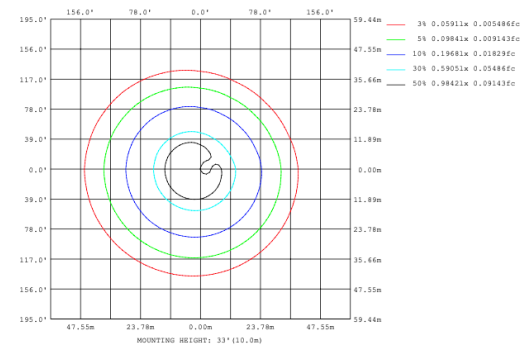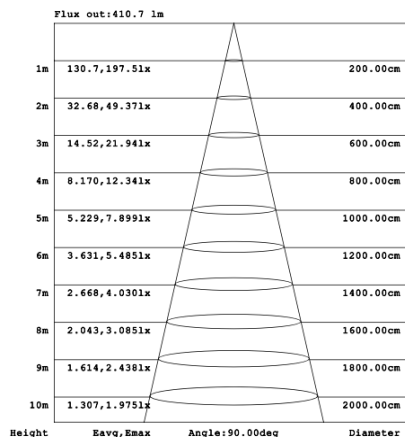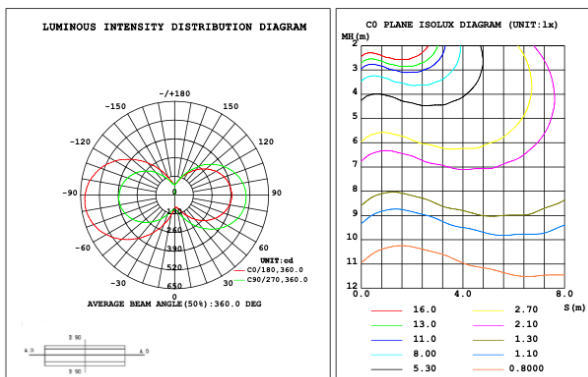

SB-S01B80WZ 70.87" 80W @ 4000K

