


## LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:220.23V I:0.1955A P:39.113W PF:0.9084 Freq:50.00Hz Lamp Flux:2823.99x1 lm		
NAME: SB-U01A40WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:800mm	

DATA OF LAMP		PHOTOMETRIC DATA Eff: 72.20 lm/W			
MODEL		I <sub>max</sub> (cd)	338.2	S/MH(C0/180)	1.43
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	1.40
RATED VOLTAGE(V)	--	TOTAL FLUX(lm)	2824.0	η UP,DN(C0-180)	22.4,28.1
NOMINAL FLUX(lm)	2823.99	CIE CLASS	DIFFUSE	η UP,DN(C180-360)	21.8,27.7
LAMPS INSIDE	1	η up(%)	44.2	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	--	η down(%)	55.8	CIBSE SHR MAX	1.55

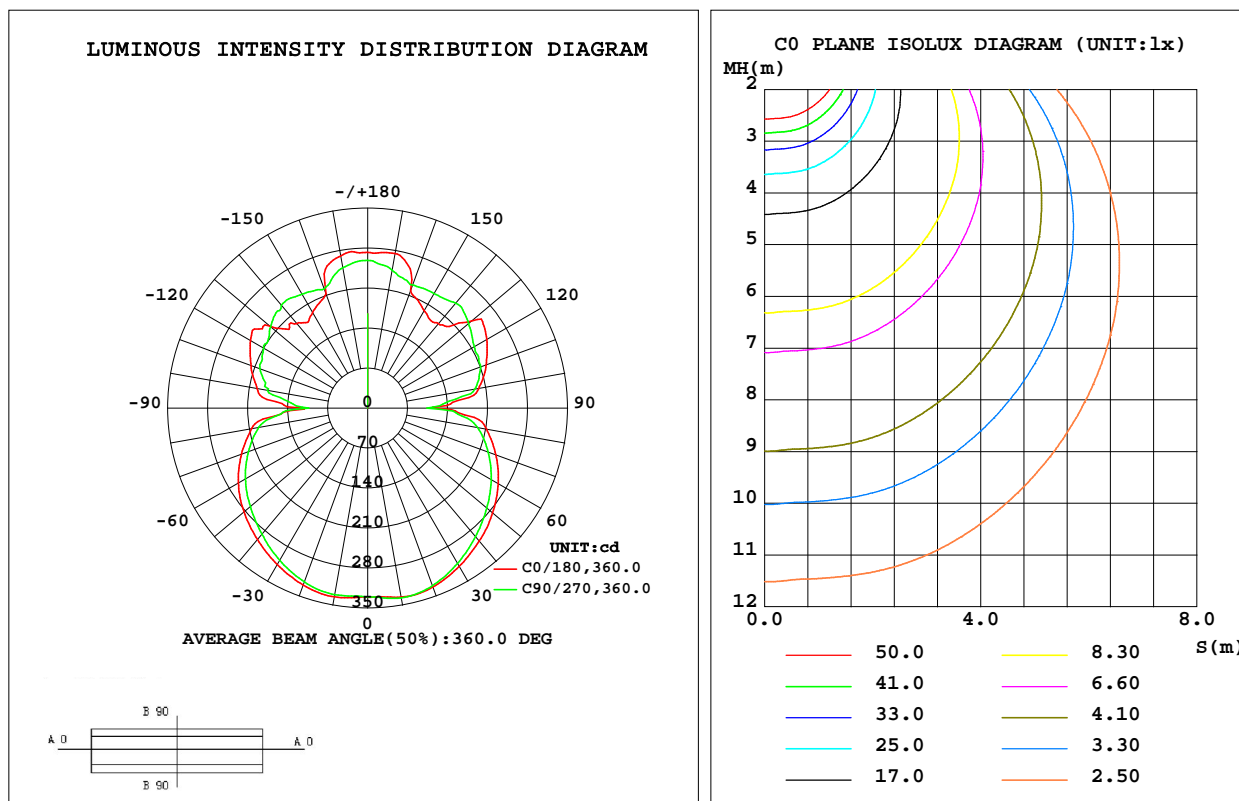

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-05-30

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:

## ZONAL FLUX DIAGRAM

## ZONAL FLUX DIAGRAM:

$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	336.0	337.0	337.3	335.1	335.4	333.4	331.6	331.8	0- 10	31.76	31.76	1.12,1.12
20	333.5	333.4	331.0	328.5	329.8	326.1	324.1	327.6	10- 20	94.30	126.1	4.46,4.46
30	320.2	318.1	314.3	313.0	316.4	311.3	308.0	313.2	20- 30	148.8	274.8	9.73,9.73
40	303.8	300.2	293.7	295.3	300.3	294.3	288.1	296.3	30- 40	191.6	466.4	16.5,16.5
50	285.5	279.3	272.3	274.7	282.9	273.7	268.3	276.3	40- 50	221.9	688.3	24.4,24.4
60	263.9	255.7	249.8	251.0	261.5	250.2	247.2	253.3	50- 60	238.3	926.6	32.8,32.8
70	238.7	230.1	224.3	225.2	235.0	224.2	221.9	228.4	60- 70	239.7	1166	41.3,41.3
80	211.2	201.8	195.2	196.9	206.1	195.4	193.3	200.3	70- 80	226.8	1393	49.3,49.3
90	118.3	117.7	104.1	108.1	115.3	109.7	103.5	116.7	80- 90	182.2	1575	55.8,55.8
100	197.4	183.3	190.4	185.8	196.3	176.8	178.1	173.6	90-100	163.3	1739	61.6,61.6
110	220.6	201.7	210.7	200.7	217.5	190.1	200.8	190.7	100-110	202.7	1941	68.7,68.7
120	240.7	216.3	215.9	207.0	236.9	205.9	210.2	195.7	110-120	202.2	2144	75.9,75.9
130	237.5	208.4	230.9	200.0	223.6	188.7	222.1	199.4	120-130	189.3	2333	82.6,82.6
140	193.2	224.8	239.9	206.7	193.3	207.3	235.4	218.2	130-140	164.5	2497	88.4,88.4
150	197.5	236.3	231.9	190.2	193.4	186.2	230.5	228.4	140-150	132.8	2630	93.1,93.1
160	219.6	262.0	229.5	202.2	213.3	189.8	222.4	235.5	150-160	99.81	2730	96.7,96.7
170	274.8	265.4	245.3	247.2	270.7	247.0	250.1	262.3	160-170	69.18	2799	99.1,99.1
180	272.7	261.8	258.7	260.2	273.0	262.3	258.9	260.1	170-180	24.84	2824	100,100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

Conical surface Flux(90deg): 574.41 lm

%lum = 20.3%

%lamp = 20.3%

Conical surface Flux(120deg): 926.56 lm

%lum = 32.8%


%lamp = 32.8%

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-05-30

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:

## LUMINANCE LIMITATION CURVES

Test:U:220.23V I:0.1955A P:39.113W PF:0.9084 Freq:50.00Hz Lamp Flux:2823.99x1 lm		
NAME: SB-U01A40WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:800mm	

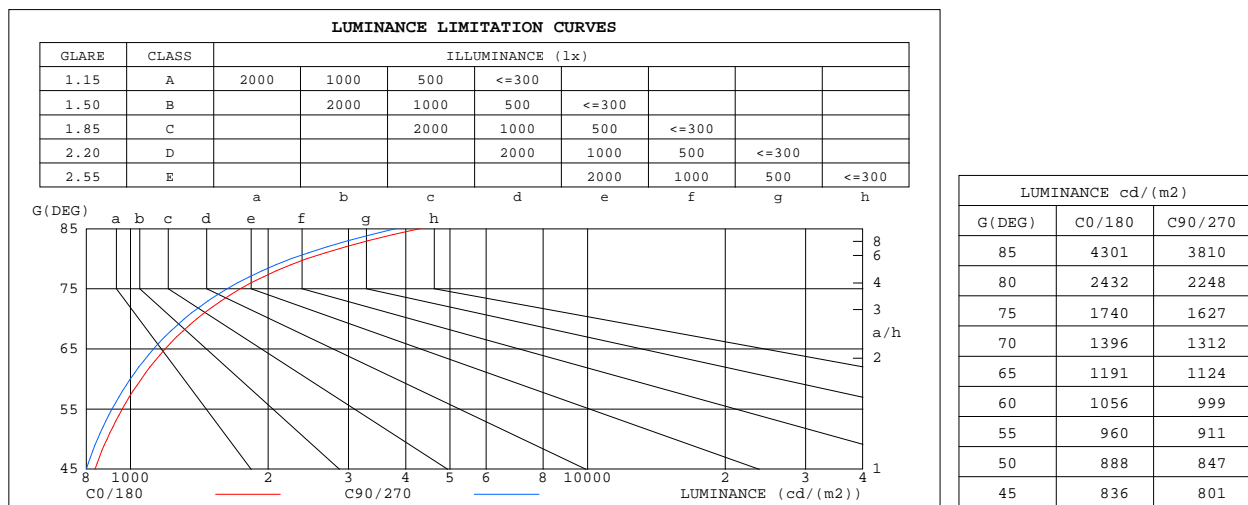


C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:XIAOMI  
Test Date:2023-05-30

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:9.000m [K=1.0000]  
Remarks:

## CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:220.23V I:0.1955A P:39.113W PF:0.9084 Freq:50.00Hz Lamp Flux:2823.99x1 lm		
NAME: SB-U01A40WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:800mm	

$\rho_{cc}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio                      Coefficients of Utilization(CU)															
0.0	1.09	1.09	1.09	1.01	1.01	1.01	.87	.87	.87	.73	.73	.73	.61	.61	.61	.56
1.0	.90	.85	.80	.84	.79	.75	.71	.68	.65	.60	.57	.55	.49	.47	.46	.40
2.0	.77	.69	.63	.71	.65	.59	.61	.55	.51	.51	.47	.43	.41	.39	.36	.31
3.0	.67	.58	.51	.62	.54	.48	.52	.46	.41	.44	.39	.35	.36	.32	.29	.25
4.0	.58	.49	.42	.54	.46	.40	.46	.39	.34	.38	.33	.29	.31	.27	.24	.21
5.0	.52	.42	.36	.48	.40	.33	.41	.34	.29	.34	.29	.25	.28	.24	.21	.17
6.0	.46	.37	.31	.43	.35	.29	.36	.30	.25	.31	.25	.21	.25	.21	.18	.15
7.0	.41	.33	.26	.38	.30	.25	.33	.26	.22	.28	.22	.19	.23	.19	.16	.13
8.0	.37	.29	.23	.35	.27	.22	.30	.24	.19	.25	.20	.16	.21	.17	.14	.11
9.0	.34	.26	.21	.32	.24	.19	.27	.21	.17	.23	.18	.15	.19	.15	.12	.10
10.0	.31	.23	.18	.29	.22	.17	.25	.19	.15	.21	.16	.13	.18	.14	.11	.09

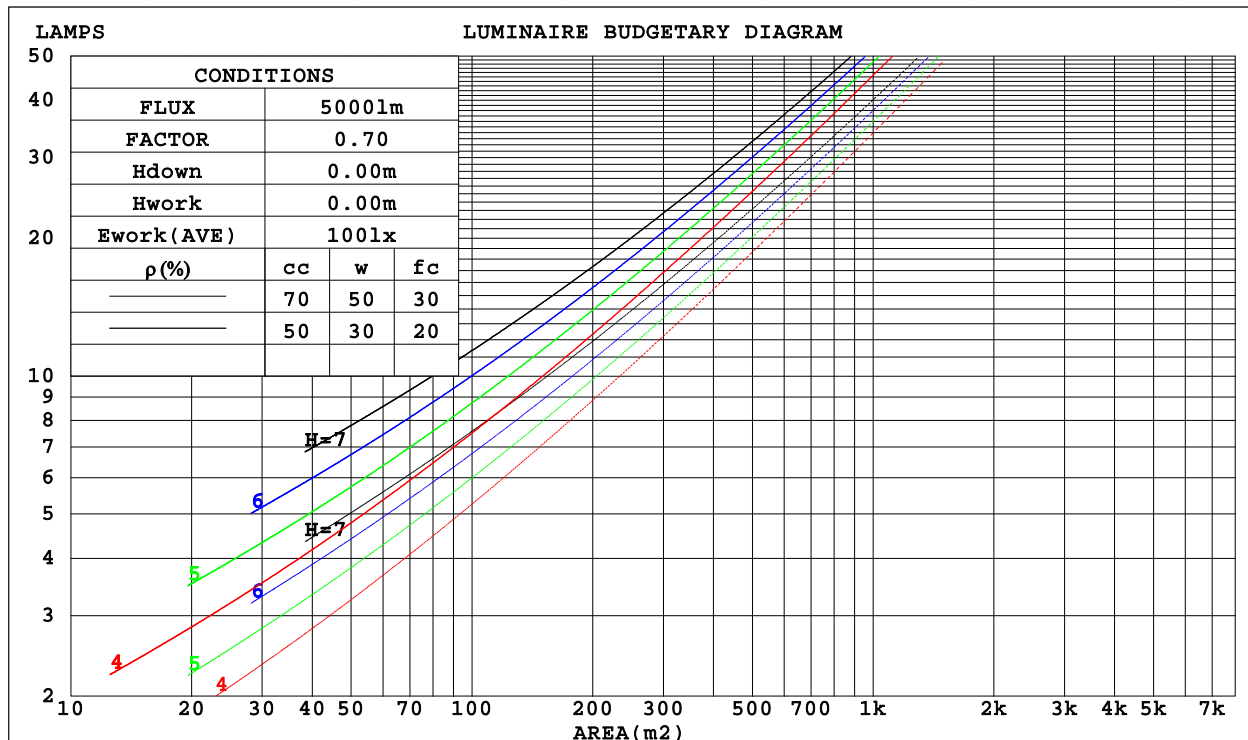

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-05-30

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:

## WEC AND CCEC

Test:U:220.23V I:0.1955A P:39.113W PF:0.9084 Freq:50.00Hz Lamp Flux:2823.99x1 lm		
NAME: SB-U01A40WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:800mm	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Wall Exitance Coefficients(WEC)												
0.0																
1.0	.369	.210	.066	.349	.199	.063	.310	.178	.057	.274	.158	.051	.242	.140	.045	
2.0	.319	.175	.054	.300	.165	.051	.265	.147	.046	.233	.130	.041	.203	.115	.036	
3.0	.283	.151	.045	.266	.143	.043	.234	.127	.039	.204	.112	.034	.177	.098	.030	
4.0	.255	.132	.039	.239	.125	.037	.210	.111	.033	.183	.098	.030	.157	.085	.026	
5.0	.232	.118	.034	.218	.112	.033	.190	.099	.029	.165	.087	.026	.142	.076	.023	
6.0	.213	.107	.030	.199	.101	.029	.174	.089	.026	.151	.079	.023	.129	.068	.020	
7.0	.196	.097	.027	.184	.092	.026	.161	.081	.023	.139	.071	.021	.119	.062	.018	
8.0	.182	.089	.025	.171	.084	.024	.149	.075	.021	.129	.065	.019	.110	.057	.016	
9.0	.170	.082	.023	.159	.078	.022	.139	.069	.020	.120	.060	.017	.103	.052	.015	
10.0	.159	.076	.021	.149	.072	.020	.130	.064	.018	.113	.056	.016	.096	.048	.014	

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)										
0.0	.527	.527	.527	.451	.451	.451	.308	.308	.308	.177	.177	.177	.057	.057	.057		
1.0	.524	.495	.469	.448	.425	.404	.307	.292	.279	.177	.169	.162	.057	.054	.053		
2.0	.518	.474	.437	.443	.408	.377	.304	.282	.263	.175	.164	.154	.056	.053	.050		
3.0	.511	.458	.416	.438	.395	.361	.301	.275	.253	.174	.160	.149	.056	.052	.049		
4.0	.504	.446	.403	.432	.386	.350	.297	.269	.246	.172	.157	.146	.055	.051	.048		
5.0	.496	.437	.393	.426	.378	.342	.294	.264	.242	.170	.155	.143	.055	.051	.047		
6.0	.489	.430	.387	.421	.372	.337	.290	.260	.238	.168	.153	.142	.054	.050	.047		
7.0	.483	.424	.382	.415	.367	.333	.287	.257	.236	.167	.152	.140	.054	.050	.046		
8.0	.476	.418	.378	.410	.363	.330	.284	.255	.234	.165	.150	.139	.053	.049	.046		
9.0	.471	.414	.375	.405	.359	.327	.281	.252	.232	.164	.149	.139	.053	.049	.046		
10.0	.465	.410	.373	.401	.356	.326	.278	.250	.231	.162	.148	.138	.053	.049	.046		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-05-30

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:220.23V I:0.1955A P:39.113W PF:0.9084 Freq:50.00Hz Lamp Flux:2823.99x1 lm											
NAME: SB-U01A40WSZ					TYPE:			WEIGHT:			
SPEC.:4000K					DIM.:			SERIAL No.:			
MFR.: SNOWBALL					SUR.:800mm						
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	10.1	11.2	10.9	12.0	13.0	9.8	10.9	10.6	11.7	12.8	
	3H	12.8	13.8	13.6	14.6	15.7	12.5	13.5	13.3	14.3	15.4
	4H	14.3	15.2	15.1	16.1	17.2	13.9	14.9	14.8	15.7	16.8
	6H	16.0	16.8	16.8	17.7	18.8	15.6	16.4	16.4	17.3	18.4
	8H	16.9	17.7	17.8	18.6	19.7	16.4	17.3	17.3	18.2	19.3
	12H	17.9	18.7	18.8	19.6	20.8	17.4	18.2	18.3	19.1	20.2
4H	2H	10.8	11.8	11.7	12.6	13.7	10.7	11.6	11.5	12.5	13.6
	3H	13.7	14.5	14.6	15.4	16.6	13.5	14.3	14.4	15.2	16.3
	4H	15.4	16.1	16.3	17.0	18.2	15.1	15.9	16.0	16.8	17.9
	6H	17.2	17.9	18.2	18.8	20.0	16.9	17.6	17.8	18.5	19.7
	8H	18.3	18.9	19.2	19.8	21.0	17.9	18.5	18.8	19.4	20.6
	12H	19.4	20.0	20.4	20.9	22.2	18.9	19.5	19.9	20.4	21.6
8H	4H	16.0	16.6	16.9	17.5	18.7	15.7	16.4	16.7	17.3	18.5
	6H	18.1	18.6	19.0	19.6	20.8	17.8	18.3	18.8	19.3	20.5
	8H	19.3	19.8	20.3	20.7	22.0	19.0	19.4	19.9	20.4	21.6
	12H	20.7	21.1	21.6	22.1	23.3	20.2	20.6	21.2	21.6	22.9
12H	4H	16.1	16.7	17.0	17.6	18.8	15.9	16.5	16.8	17.4	18.6
	6H	18.3	18.8	19.3	19.8	21.0	18.1	18.5	19.0	19.5	20.8
	8H	19.7	20.1	20.6	21.0	22.3	19.3	19.7	20.3	20.7	22.0
Variations with the observer position at spacings:											
S = 1.0H	+ 0.1 / - 0.1					+ 0.1 / - 0.1					
1.5H	+ 0.2 / - 0.3					+ 0.2 / - 0.3					
2.0H	+ 0.3 / - 0.4					+ 0.3 / - 0.4					

CIE Pub.117, 2824 lm Total Lamp Luminous Flux Corrected ( $8\log(F/F_0) = 3.6$ )  
Area: 0.5 m<sup>2</sup>

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:XIAOMI  
Test Date:2023-05-30

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:9.000m [K=1.0000]  
Remarks:

## UTILIZATION FACTORS TABLE

Test:U:220.23V I:0.1955A P:39.113W PF:0.9084 Freq:50.00Hz Lamp Flux:2823.99x1 lm		
NAME: SB-U01A40WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:800mm	


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
k = 0.60	40	28	21	38	27	20	35	25	19	12
0.80	49	36	28	46	34	27	41	32	25	16
1.00	57	43	35	53	41	33	47	39	31	20
1.25	63	50	42	59	48	40	52	43	36	23
1.50	69	56	47	64	53	45	56	47	41	26
2.00	76	65	56	71	61	53	62	54	47	30
2.50	81	70	62	75	66	59	65	58	52	33
3.00	85	75	67	79	70	64	68	62	56	36
4.00	90	82	75	83	76	70	72	66	62	39
5.00	93	86	80	86	80	75	74	69	65	41
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-05-30

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:

## ISOCANDELA DIAGRAM

Test:U:220.23V I:0.1955A P:39.113W PF:0.9084 Freq:50.00Hz Lamp Flux:2823.99x1 lm		
NAME: SB-U01A40WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:800mm	

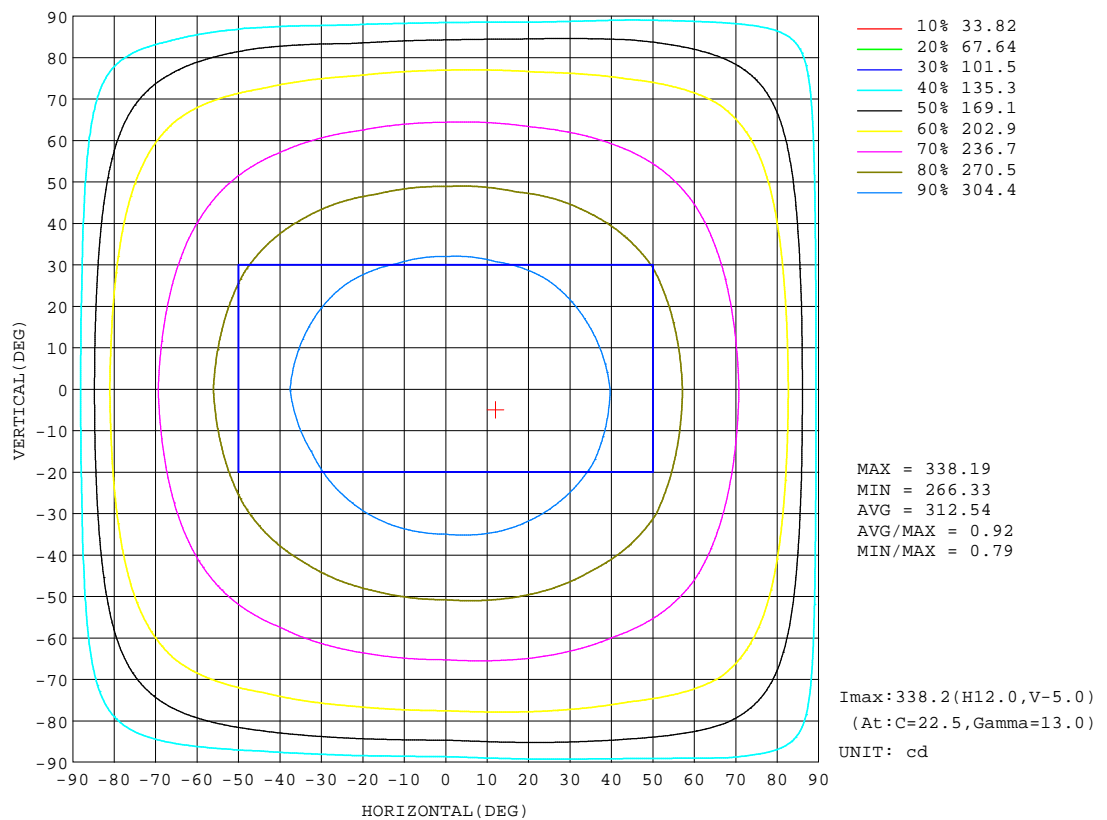


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-05-30

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:



## AAI Figure

Test:U:220.23V I:0.1955A P:39.113W PF:0.9084 Freq:50.00Hz Lamp Flux:2823.99x1 lm		
NAME: SB-U01A40WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:800mm	

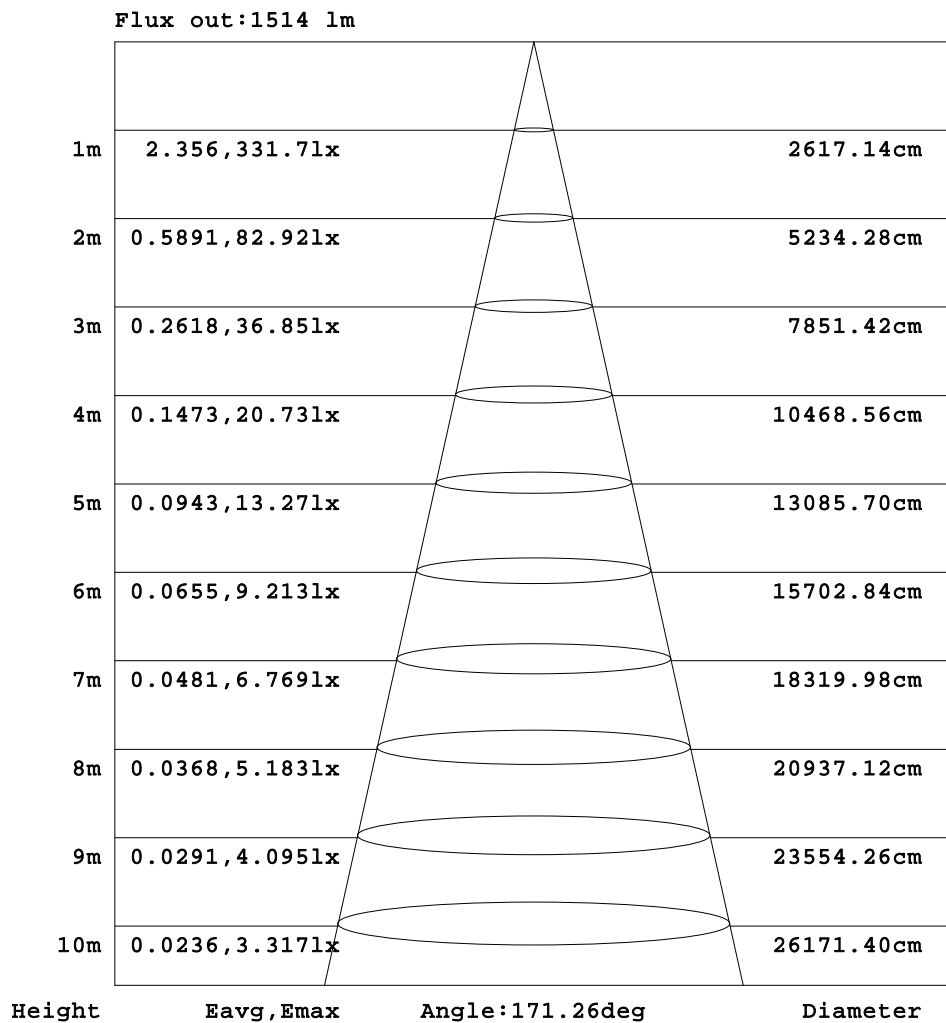


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: XIAOMI  
 Test Date: 2023-05-30

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity: 65.0%  
 Test Distance: 9.000m [K=1.0000]  
 Remarks:

### ISOLUX DIAGRAM


Test:U:220.23V I:0.1955A P:39.113W PF:0.9084 Freq:50.00Hz Lamp Flux:2823.99x1 lm		
NAME: SB-U01A40WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:800mm	

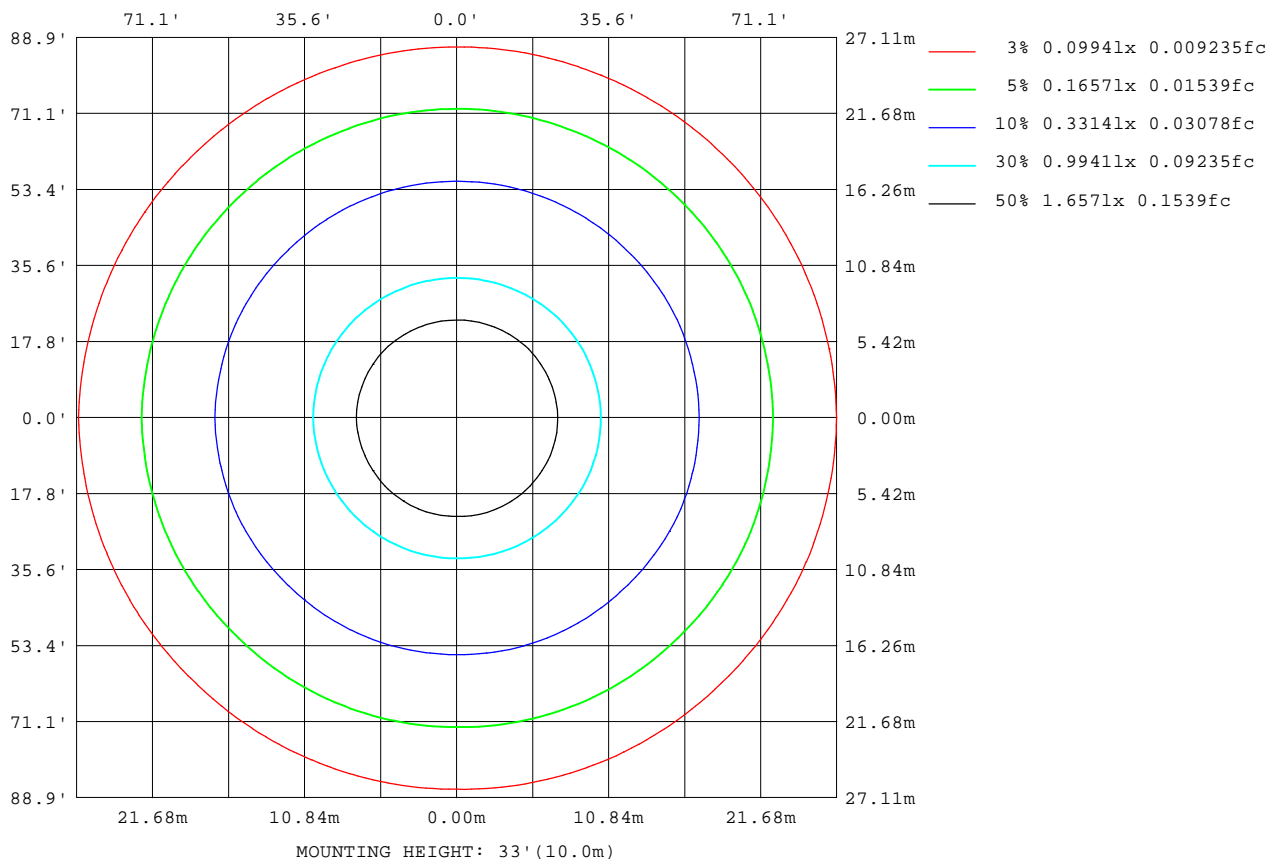

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3DEG  
 Operators:XIAOMI  
 Test Date:2023-05-30

γ Range: 0 - 180DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
 Humidity:65.0%  
 Test Distance:9.000m [K=1.0000]  
 Remarks:

### Planar Illuminance Curve

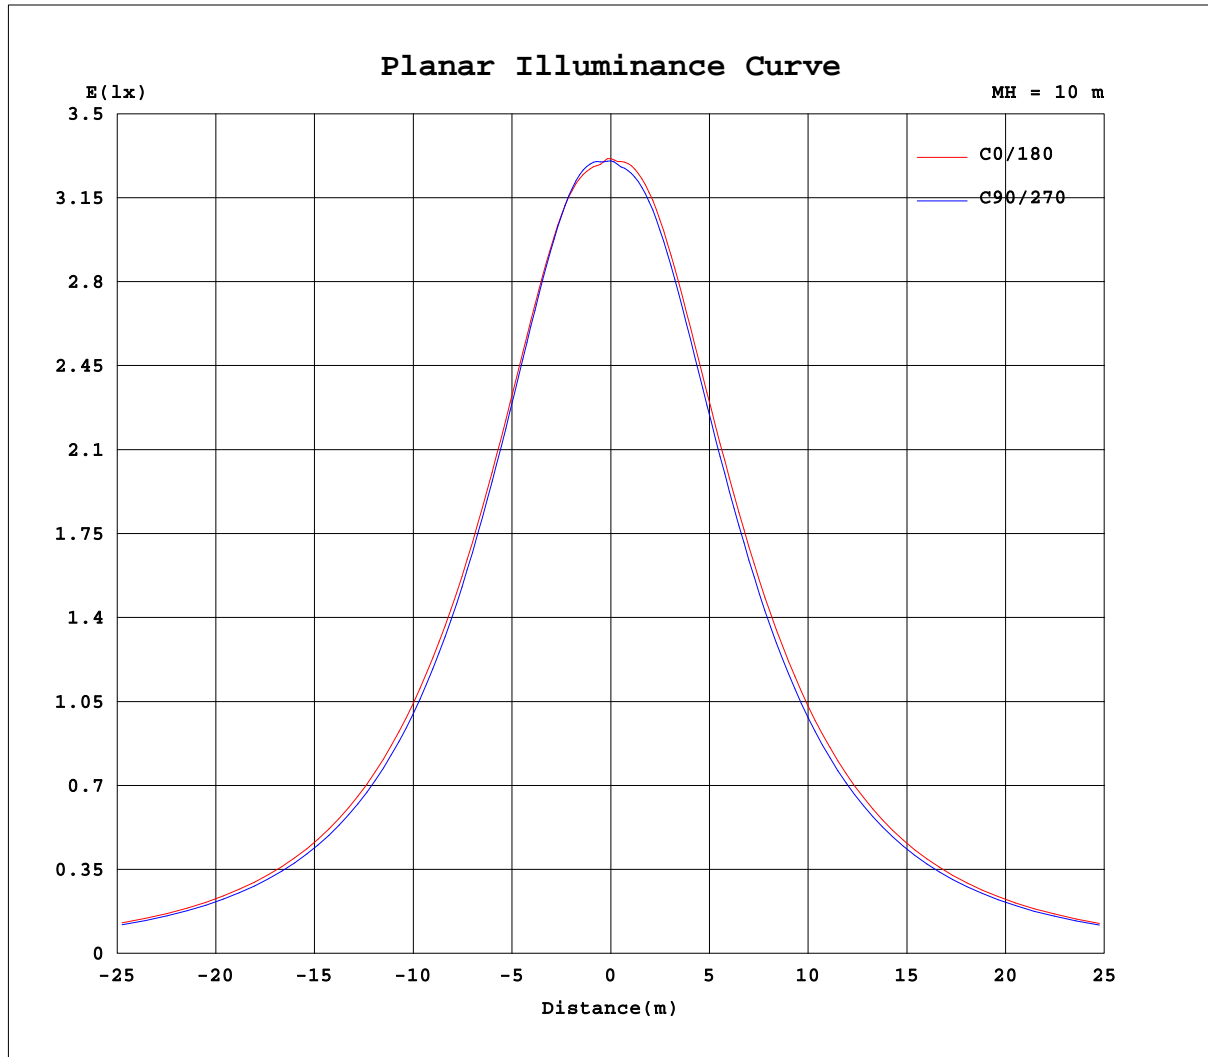

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature: 25.3DEG  
Operators: XIAOMI  
Test Date: 2023-05-30

$\gamma$  Range: 0 - 180DEG  
 $\gamma$  Interval: 1.0DEG  
Test System: EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
Humidity: 65.0%  
Test Distance: 9.000m [K=1.0000]  
Remarks:

## LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:220.23V I:0.1955A P:39.113W PF:0.9084 Freq:50.00Hz Lamp Flux:2823.99x1 lm		
NAME: SB-U01A40WSZ	TYPE:	WEIGHT:
SPEC.:4000K	DIM.:	SERIAL No.:
MFR.: SNOWBALL	SUR.:800mm	

Table--1

UNIT: cd

C(DEC) γ (DEC)	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5			
0	331	332	331	331	330	330	330	329	331	332	331	331	330	330	330	329			
5	332	333	333	333	334	333	332	331	333	333	332	331	330	330	329	329			
10	336	337	337	337	337	337	335	333	335	335	333	332	332	332	332	332			
15	337	338	337	337	336	336	334	332	334	333	331	329	330	330	332	333			
20	333	334	333	332	331	330	328	327	330	328	326	324	324	325	328	329			
25	327	328	326	325	323	323	321	320	324	321	319	317	317	318	321	323			
30	320	320	318	317	314	314	313	313	316	314	311	308	308	309	313	316			
35	312	312	309	307	304	304	304	305	309	306	303	299	298	300	305	308			
40	304	303	300	297	294	294	295	297	300	298	294	289	288	290	296	300			
45	295	295	291	287	283	283	286	288	292	289	285	279	278	281	287	292			
50	286	285	279	276	272	273	275	279	283	279	274	269	268	270	276	282			
55	275	275	268	265	261	261	263	269	273	269	262	258	258	260	265	272			
60	264	263	256	253	250	250	251	257	262	257	250	248	247	249	253	261			
65	252	250	243	241	237	238	238	244	249	243	238	235	235	237	242	248			
70	239	236	230	228	224	224	225	230	235	229	224	222	222	224	228	234			
75	225	222	216	214	211	210	211	216	221	216	210	208	208	210	215	221			
80	211	209	202	199	195	195	197	203	206	202	195	192	193	195	200	207			
85	187	189	182	175	166	167	163	164	164	157	161	157	160	168	181	186			
90	118	126	118	117	104	104	108	112	115	120	110	106	104	105	117	118			
95	159	145	142	136	143	148	160	169	177	172	156	145	140	140	137	147			
100	197	188	183	180	190	182	186	189	196	188	177	165	178	167	174	181			
105	210	198	195	191	202	190	195	197	207	193	184	173	187	174	185	193			
110	221	210	202	185	211	181	201	206	218	203	190	173	201	172	191	206			
115	231	220	212	174	214	176	209	215	227	214	204	175	204	159	199	216			
120	241	229	216	195	216	193	207	224	237	223	206	189	210	180	196	221			
125	249	237	194	208	223	206	178	225	242	226	179	198	213	194	180	220			
130	237	210	208	218	231	219	200	188	224	184	189	215	222	209	199	198			
135	202	198	220	228	238	229	217	196	195	192	212	225	230	217	212	193			
140	193	209	225	238	240	221	207	197	193	192	207	217	235	229	218	205			
145	190	213	230	243	234	211	196	187	184	181	191	201	235	234	222	206			
150	197	222	236	241	232	207	190	190	193	185	186	203	231	238	228	217			
155	208	231	242	242	231	204	190	198	202	192	192	201	227	237	232	225			
160	220	243	262	250	230	210	202	203	213	195	190	202	222	236	235	231			
165	264	278	267	250	236	230	234	238	262	239	231	233	238	248	261	268			
170	275	279	265	253	245	245	247	249	271	254	247	247	250	253	262	270			
175	273	273	264	256	252	258	258	262	275	262	259	256	257	257	259	266			
180	273	268	262	258	259	260	260	266	273	268	262	258	259	260	260	266			

C Range: 0 - 360DEG  
C Interval: 22.5DEG  
Test Speed: HIGH  
Temperature:25.3DEG  
Operators:XIAOMI  
Test Date:2023-05-30

γ Range: 0 - 180DEG  
γ Interval: 1.0DEG  
Test System:EVERFINE GO-3000H\_V1 SYSTEM V2.00.411  
Humidity:65.0%  
Test Distance:9.000m [K=1.0000]  
Remarks: