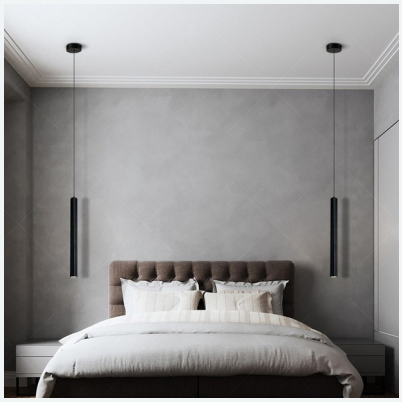
SELVA LINE

SINGLE PENDANT SYSTEM

Selva Line is a customizable single-pendant system. Choose the mounting arrangement, body length, light source, finish, lens, and cable length.

SINGLE PENDANT APPLICATION	SB-R101A	SB-R101B
		
Single pendant installation	Canopy-mounted driver	Remote-mounted driver

Standard body: 23.62 in long × 1.57 in diameter / 8 W / 480 lm.

Additional pendant styles A–AB are shown on page 4. Dimensions vary by style; contact us for details.

FEATURES

5-year limited warranty. Ships fully assembled. Direct illumination.

Standard body: 23.62 in long × 1.57 in diameter. See SIZE on page 2 for other lengths. Custom diameters, lengths and profiles are available.

Flat lens is standard. Acrylic and bubble acrylic lens lengths are selectable separately from body length. Custom lens materials and dimensions are available on request.

Nominal efficacy: 60 lm/W.

SPECIFICATIONS

Light quality	Electrical	Finish
CRI 90+ Selectable 3000K/3500K/4000K or 2700K/3500K/4000K. Factory setting: 4000K. Static and custom CCT available.	120-277 VAC, 50/60 Hz Continuous 0-10V dimming standard. ELV/Triac available. UL Listed for dry locations.	Aged Brass, Black Jack, Platinum Silver and Gloss White. More than 6,500 custom colors. See finish codes and color samples on pages 2-3.

Custom CCT, RGBW and tunable white configurations are available. Consult the factory for the selected light source and control system.

Standard mounting drawings and fixture weights are on page 5.

ORDERING INFORMATION

Project: _____ Fixture type: _____ Qty: _____

1 Mounting	2 Size	3 CCT	4 Control	5 Finish	6 Lens	7 Cable
SB-R101A	60	S	D	A	F	10

MODEL NUMBER EXAMPLE: SB-R101A60 / SDAF10

1 MOUNTING	CHOOSE ONE
SB-R101A	Canopy-mounted driver
SB-R101B	Remote-mounted driver
X	Custom canopy size, shape or configuration - consult factory

2 SIZE	BODY LENGTH / W / NOMINAL LM
10	3.94 in / 5 W / 300 lm
20	7.87 in / 5 W / 300 lm
30	11.81 in / 5 W / 300 lm
40	15.75 in / 5 W / 300 lm
50	19.69 in / 5 W / 300 lm
60	23.62 in / 8 W / 480 lm (Standard)
X	Custom body or profile dimensions - consult factory

3 CCT	CHOOSE ONE
S	Selectable 3000K / 3500K / 4000K; factory set to 4000K; CRI 90 (Standard)
A	Selectable 2700K / 3500K / 4000K; factory set to 4000K; CRI 90
27K / 30K / 35K / 40K / 50K	Static CCT: 2700K / 3000K / 3500K / 4000K / 5000K, respectively
X	Custom CCT or CRI - consult factory

4 CONTROL	CHOOSE ONE
D	Continuous 0-10V dimming (Standard)
T	ELV/Triac dimming
X	Custom control or dimming - consult factory

Standard 23.62 in body: specify size code 60.

Input voltage: 120-277 VAC, 50/60 Hz.

5 FINISH	CHOOSE ONE
A	Aged Brass / PPB-10674
B	Black Jack / USS-1522
S	Platinum Silver / PMB-8173
W	Gloss White / PSS-5690
X	Custom finish - consult factory

Standard body: 23.62 in long × 1.57 in diameter.
Select body length in SIZE, then select the lens below.

6 LENS	CHOOSE ONE
F	Flat lens (Standard)
A	3.94 in acrylic lens
B	3.94 in bubble acrylic lens
C	7.87 in acrylic lens
D	7.87 in bubble acrylic lens
E	11.81 in acrylic lens for 23.62 in body
X	Custom lens material or dimensions - consult factory



Flat lens / Bubble acrylic / Acrylic

7 CABLE	OVERALL CABLE LENGTH
05	5 ft / 60 in
10	10 ft / 120 in (Standard)
15	15 ft / 180 in
20	20 ft / 240 in
25	25 ft / 300 in
30	30 ft / 360 in
X	Custom cable length - consult factory

Format: [mounting][size] / [CCT][control][finish][lens][cable]. Example: SB-R101A60 / SDAF10.

For custom selections (X), include the requested details in the order notes and consult the factory.

FINISH OPTIONS

Explore more than 6,500 finishes and colors, including precise color matching, team colors, custom RAL colors, metallic finishes, sparkle finishes, and transparent textures. Contact the factory for pricing and availability.

Request color samples at customerservice@snowball-inc.com. Colors may vary by screen and display settings.

SOLID TONE FINISHES

PMB-4364 Pearl White	**PMB-0593** Soft White	**PSB-8051** Dirty White	**PMB-0513** Silver Metallic II	**PMB-6525** BMW Silver	**HSS-1336** Silk Satin Black
PPS-0106 Ink Black	**USS-2603** Gloss Black	**UMB-0336** Metallic Bronze	**UMB-0493** US Bronze	**EMS-0940** Spanish Gold	**PMB-0808** Performance Gold
PSS-4971 Very Red	**PSS-2876** Orange Glow	**PSS-1791** JuJu Orange	**PSS-0118** Spring Yellow	**PSB-5945** Bright Green	**PMB-10657** Yama Blue
PPB-2846 Purple Glaze	**PSS-1670** Rosette Pink	**PSS-4008** Jewel Grey	**PSS-4500** Crest Grey	**PSS-4647** Beach Tan	**PMB-5478** Montana Gold

SHIMMER AND GLITTER FINISHES

PMB-5567 Champagne Shimmer	**UMB-2062** Shimmer Gold	**PMS-5677** Shimmer Copper	**PMB-6611** Shimmer Black	**PPB-8167** Trans Glitter Gold	**PMB-6762** Alloy Glitter

PALLEON METALLIC TEXTURED FINISHES

PVB-10274 Palleon Paradise	**PVB-10272** Palleon Fire	**PVB-10271** Palleon Golden Green	**PVB-10268** Dark Palleon Paradise	**PVB-10267** Dark Palleon Golden Green	**PVB-10268** Dark Palleon Fire
PVB-10273 Palleon Panther	**PVB-10269** Dark Palleon Panther				

CHROME AND SPECIALTY FINISHES

UMS-10671 Super Chrome Plus	**PPB-6677** Black Chrome III	**PMB-4124** Bronze Chrome	**UMB-10813** Rose Chrome	**UMB-10815** Brass Chrome	**UMB-10816** Copper Chrome
PPS-6530 Brassy Gold	**PPB-2262** Anodized Gold	**PPB-8034** Melted Bronze	**PPB-6325** Metallic Clear	**PPB-5633** Tinted Clear	**PPB-5936** Anodized Red

SPARKLE FINISHES

PPB-4694 Super Red Sparkle	**PPB-4727** Silver Sparkle	**PPB-5835** Rockstar Sparkle	**PMB-4130** Pearl Sparkle	**PPB-5004** Ultra Blue Sparkle	**PPB-5078** Magnum Blue Sparkle
PMB-2750 Dark Grey Sparkle	**PMB-6769** Deep Blue Sparkle	**PPB-4499** Gold Sparkle	**PMB-4417** Baby Blue Sparkle		

WETSTONE WRINKLED TEXTURE FINISHES


PWB-2232 Wetstone Black	**PWB-9157** Wetstone Gold Bronze	**PWB-9156** Wetstone Copper	**PWB-2343** Wetstone Rock Bronze	**PWB-2590** Wetstone Emerald II

EMERGENCY AND STYLE OPTIONS

EMERGENCY BATTERY OPTIONS

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory-installed remote emergency battery pack, 5 W, 90-minute runtime
	SB-EBP/10.7W/B	Factory-installed remote emergency battery pack, 10.7 W, 90-minute runtime
	SB-EBP/17W/B	Factory-installed remote emergency battery pack, 17 W, 90-minute runtime

ADDITIONAL PENDANT STYLES


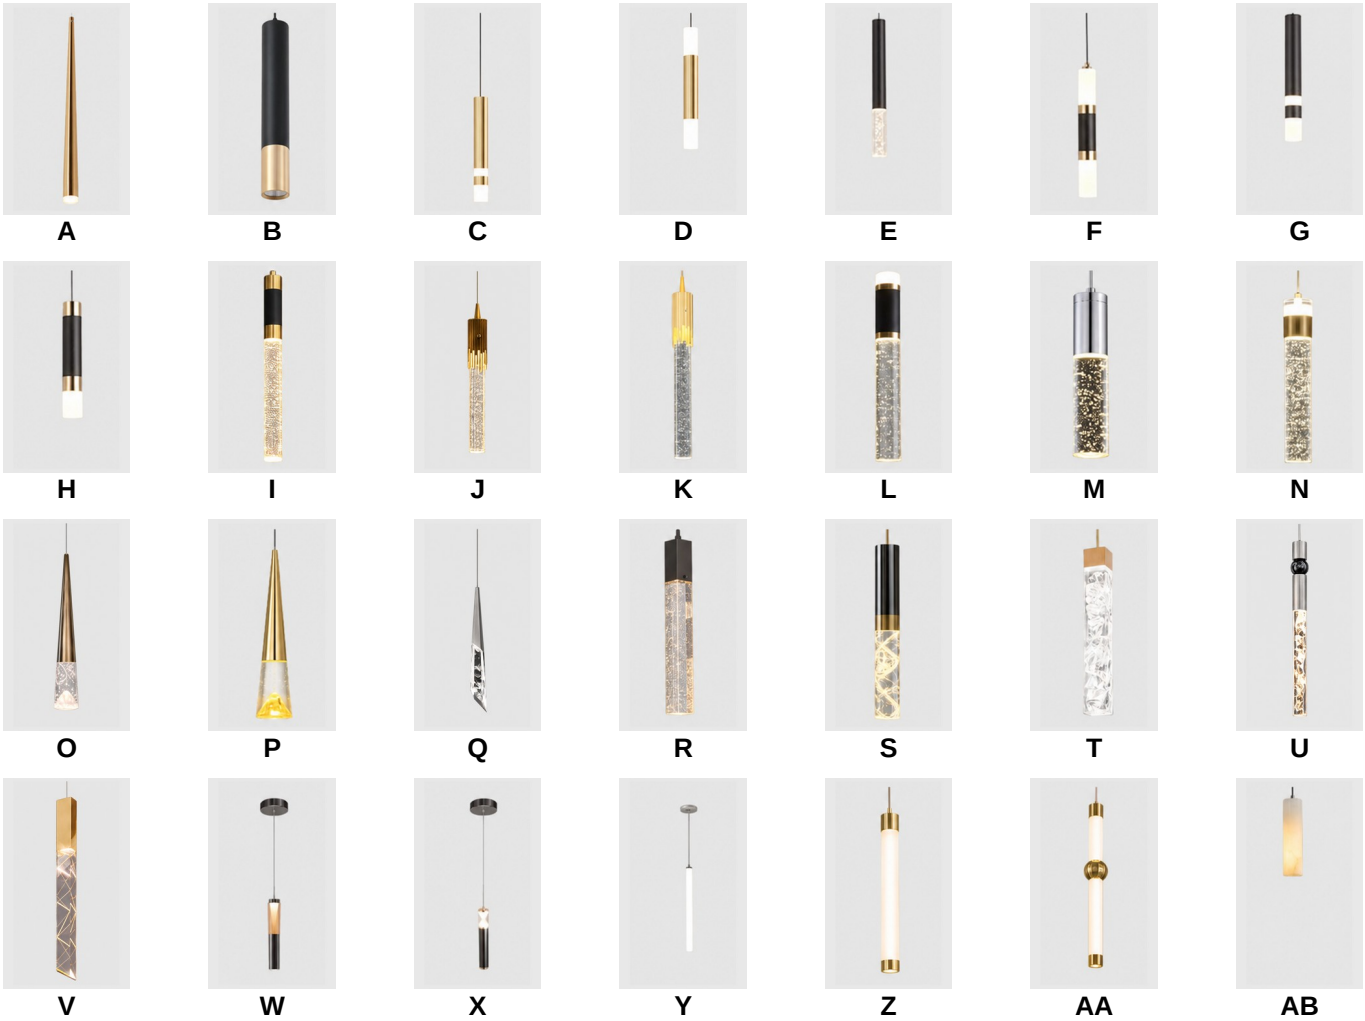


Additional pendant styles are available. Dimensions vary by style. Contact us with the reference letter for dimensions, configurations, and pricing.
For other pendant designs, explore AXIS and Chamonix, or contact us to discuss a custom design.

DIMENSIONS AND WEIGHTS

STANDARD SINGLE PENDANT WITH FLAT LENS

Standard body: 23.62 in body length × 1.57 in body diameter. Other catalog body lengths and custom options are listed on page 2.

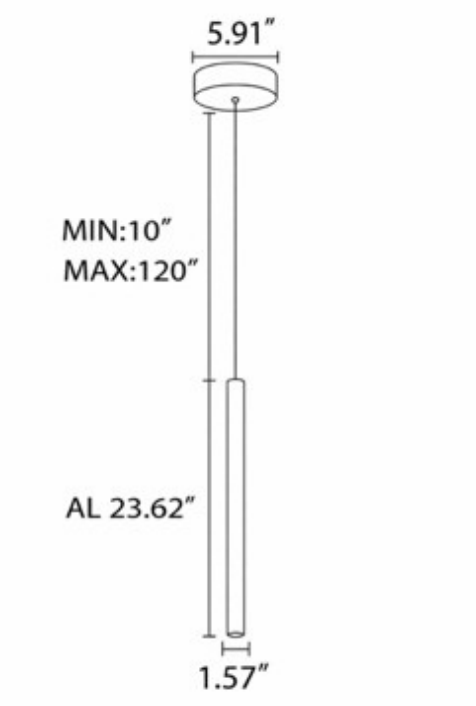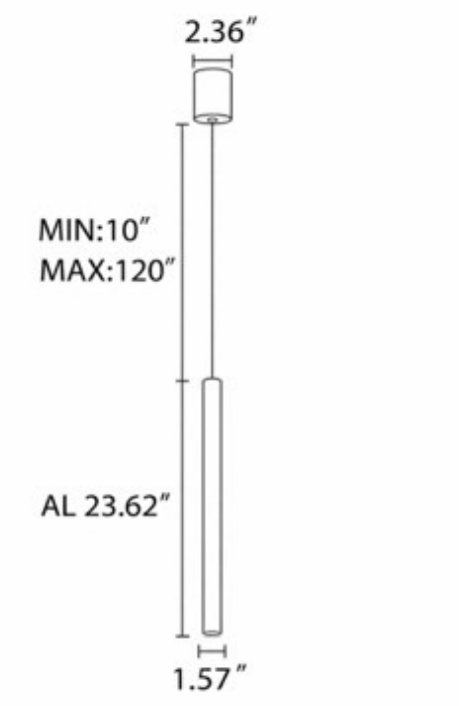SB-R101A60	SB-R101B60
Canopy-mounted driver	Remote-mounted driver
	
Fixture weight: 1.2 lb	**Fixture weight: 1.8 lb**

Dimensions shown in inches. The drawings above apply to the standard straight body with flat lens. Other pendant styles have different dimensions; contact us with the style reference letter for details.