

Telluride- Kendall 2 Tier

PRODUCT DESCRIPTION

Introducing the Telluride series: an exquisite range of elegant chandeliers in various sizes and sophisticated styles. This modern chandelier embodies a fusion of avant-garde production techniques and meticulous attention to detail, hallmarking superior craftsmanship. Each piece is adorned with crystal chains of varying lengths, exuding charm and elegance reminiscent of precious jewels. With tunable white and RGBW options, various crystal chain hues, and multiple decorative crystal drop styles, these stunning chandeliers are the perfect addition to enhance the ambiance of any luxury space. Shipped assembled for your convenience.

FEATURES

- 5-year limited warranty.
- Ships assembled.
- Illumination direct.
- Extruded aluminum housing up to 71.65", 1 continuous ring without joints.
- Crystal chain body, multiple color options available.
- Fixture delivered lumens per watt ratio up to 60 LPW not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.
- Can be remote driver mounted or driver concealed within the canopy, can be mounted on sloped ceiling.
- Over 50 lbs fixture must be installed using a U.L. listed outlet box or supported independently of the outlet box.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC, Dali, DMX, ZigBee available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch



SB-D402A



SB-D402B



SB-D402C



SB-D402D



SB-D402E







SB-D402F

MODEL INFORMATION:

Example: SB-D402A50WSWA

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Canopy and Profile Finishes	"Y" Crystal Chain Hues	"X" Aircraft Cable	
*SB-D402A SB-D402B SB-D402C SB-D402D SB-D402E SB-D402F	50W= 24.40"+16.50"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming (default)	* W=Gloss White	*A=Diamond	*Blank=10' foot 120" (default)	
			L=ELV / Triac dimming	S=Platinum Silver	B=Coal Black	15'=15 foot 180"	
	C=Sapphire Blue				5'=5 foot 60"		
	90W= 40.10'+32.30"		A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	B=Black Jack	D=Zircon Blue	F=Emerald Green
		E=Aquamarine				G=Peridot Green	
		H=Citrine				25'=25 foot 300"	
	110W= 48.03"+40.10"	T=3K-4K Tunable White control by remote/wall control	C=Dali	O=Oil Rubbed Bronze	I=Amber		30'=30 foot 360"
					J=Ruby Red		
	150W= 71.65"+59.80"	R3= RGB+3000K	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	Find page 3 for custom color options or select from website Color Collections	Find page 4 for custom color options or ask factory about specific crystal hues.	Request specialty cable lengths from factory.	
		R4=RGB+4000K					
Please request specialty pricing for alternative Kelvin temperatures, additional sizes, customizable configurations, specialty color finishes, variations in aircraft cable length, and available controls.			See control options				

STANDARD CANOPY AND PROFILE COLOR FINISHES



Discover beyond our standard hues with over 6,500 [finishes and colors](#) available for your luminaire, including precise color matching, NFL team colors, and custom RAL finishes. Elevate your design with metallic, sparkle, or transparent textures for a touch of individuality. Explore our most popular selections below and contact our factory for personalized quotes.

You can request color swatches by emailing us at customerservice@snowball-inc.com

Please note: Colors may appear differently due to screen display settings.



SOLID TONE FINISH

PMB-4364 Pearl White	PMB-0593 Soft White	PSB-8051 Dirty White	PMB-0513 Silver Metallic II	PMB-6525 BMW Silver	HSS-1336 Silk Satin Black
PSS-0106 Ink Black	USS-2603 Gloss Black	UMB-0336 Metallic Bronze	UMB-0493 US Bronze	EMS-0940 Spanish Gold	PMB-0808 Performance Gold
PSS-4971 Very Red	PSS-2876 Orange Glow	PSS-1791 JuJu Orange	PSS-0118 Spring Yellow	PSB-5945 Bright Green	PMB-10657 Yama Blue
PPB-2846 Purple Glaze	PSS-1670 Rosette Pink	PSS-4008 Jewel Grey	PSS-4500 Crest Grey	PSS-4647 Beach Tan	PMB-5478 Montana Gold

SHIMMER/ GLITTER FINISH

PMB-5567 Champagne Shimmer	UMB-2062 Shimmer Gold	PMS-5677 Shimmer Copper	PMB-6611 Shimmer Black	PPB-8167 Trans Glitter Gold	PMB-6762 Alloy Glitter
--------------------------------------	---------------------------------	-----------------------------------	----------------------------------	---------------------------------------	----------------------------------

PALLEON METALLIC TEXTURED FINISH

PVB-10274 Palleon Paradise	PVB-10272 Palleon Fire	PVB-10271 Palleon Golden Green	PVB-10268 Dark Palleon Paradise	PVB-10267 Dark Palleon Golden Green	PVB-10268 Dark Palleon Fire
PVB-10273 Palleon Panther	PVB-10269 Dark Palleon Panther				

CHROME/SPECIALTY FINISH

UMS-10671 Super Chrome Plus	PPB-6677 Black Chrome III	PMB-4124 Bronze Chrome	UMB-10813 Rose Chrome	UMB-10815 Brass Chrome	UMB-10816 Copper Chrome
PSS-6530 Brassy Gold	PPB-2262 Anodized Gold	PPB-8034 Melted Bronze	PPB-6325 Metallic Clear	PPB-5633 Tinted Clear	PPB-5936 Anodized Red

SPARKLE FINISH

PPB-4694 Super Red Sparkle	PPB-4727 Silver Sparkle	PPB-5835 Rockstar Sparkle	PMB-4130 Pearl Sparkle	PPB-5004 Ultra Blue Sparkle	PPB-5078 Magnum Blue Sparkle
PMB-2750 Dark Grey Sparkle	PMB-6769 Deep Blue Sparkle	PPB-4499 Gold Sparkle	PMB-4417 Baby Blue Sparkle		

WETSTONE WRINKLED TEXTURE FINISH

PWB-2232 Wetstone Black	PWB-9157 Wetstone Gold Bronze	PWB-9156 Wetstone Copper	PWB-2343 Wetstone Rock Bronze	PWB-2590 Wetstone Emerald II
-----------------------------------	---	------------------------------------	---	--

STANDARD CRYSTAL CHAIN COLOR

A
Diamond



ADDITIONAL CRYSTAL CHAIN COLORS

B
Coal Black



C
Sapphire Blue



D
Zircon Blue



E
Aquamarine



F
Emerald Green



G
Peridot Green



H
Citrine



I
Amber



J
Ruby Red



K
Rose




LUMEN OUTPUT (for color selectable not RGBW)

Model Number	Size	Wattage	Kelvin Temp field Selectable $\pm 500K$	Delivered Lumen $\pm 10\%$
SB-D402 A/B/C/D/E/F	24.40" + 16.50"	50W	2700K/3500K/4000K or 3000K/3500K/4000K	3000 lm
	40.10" + 32.30"	90W	2700K/3500K/4000K or 3000K/3500K/4000K	5400 lm
	48.03" + 40.10"	110W	2700K/3500K/4000K or 3000K/3500K/4000K	6600 lm
	71.65" + 59.80"	150W	2700K/3500K/4000K or 3000K/3500K/4000K	9000 lm

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

RGBW/TUNABLE WHITE SMART CONTROL

[SEE SPEC AND VIDEO](#)

Get Smart

Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.


RGBW COLOR EXAMPLES

[SEE VIDEO](#)




DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"


SB-D402A Canopy mount with direct lighting.

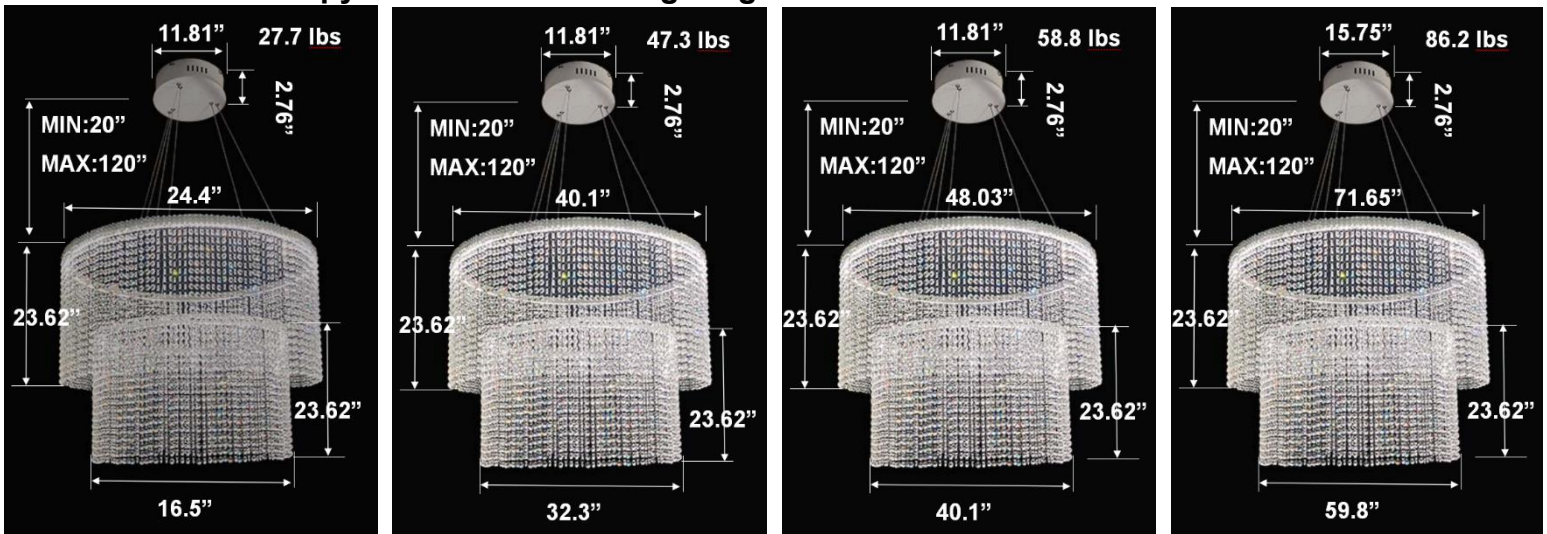


SB-D402B Canopy mount with accent ring, direct lighting.

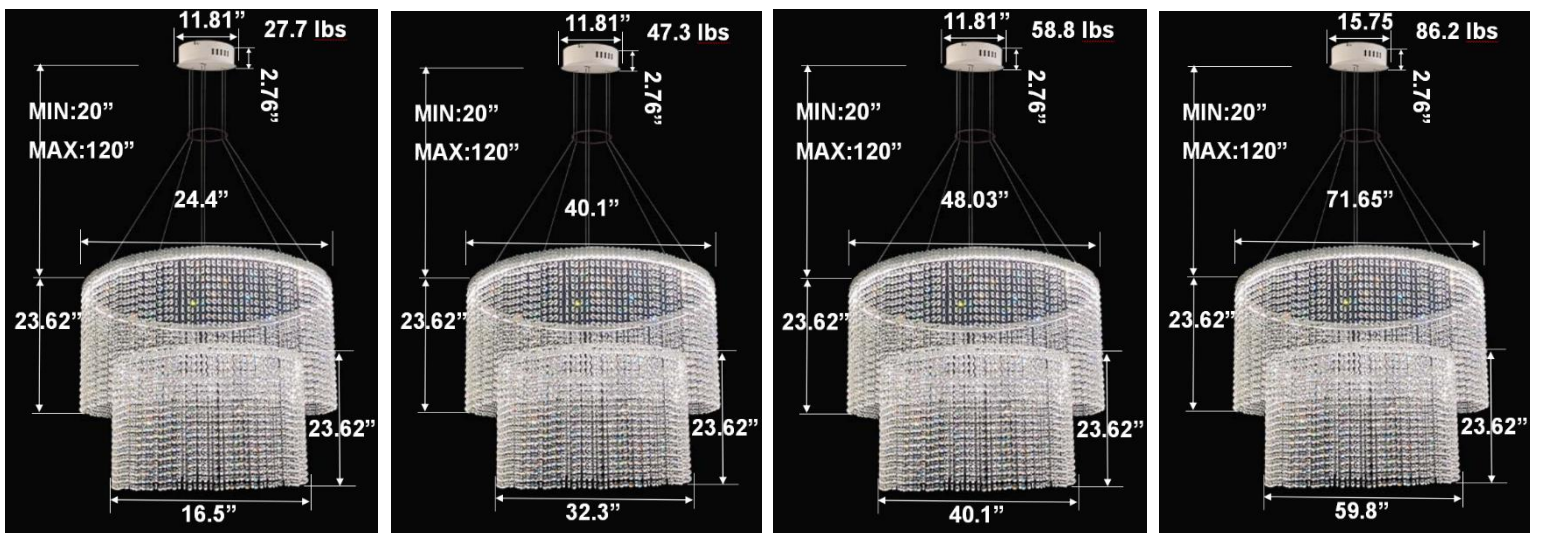


SB-D402C Remote driver with cables fixed directly to the ceiling, direct lighting.
(Driver box size: L10.83" X W3.78" X H1.81")

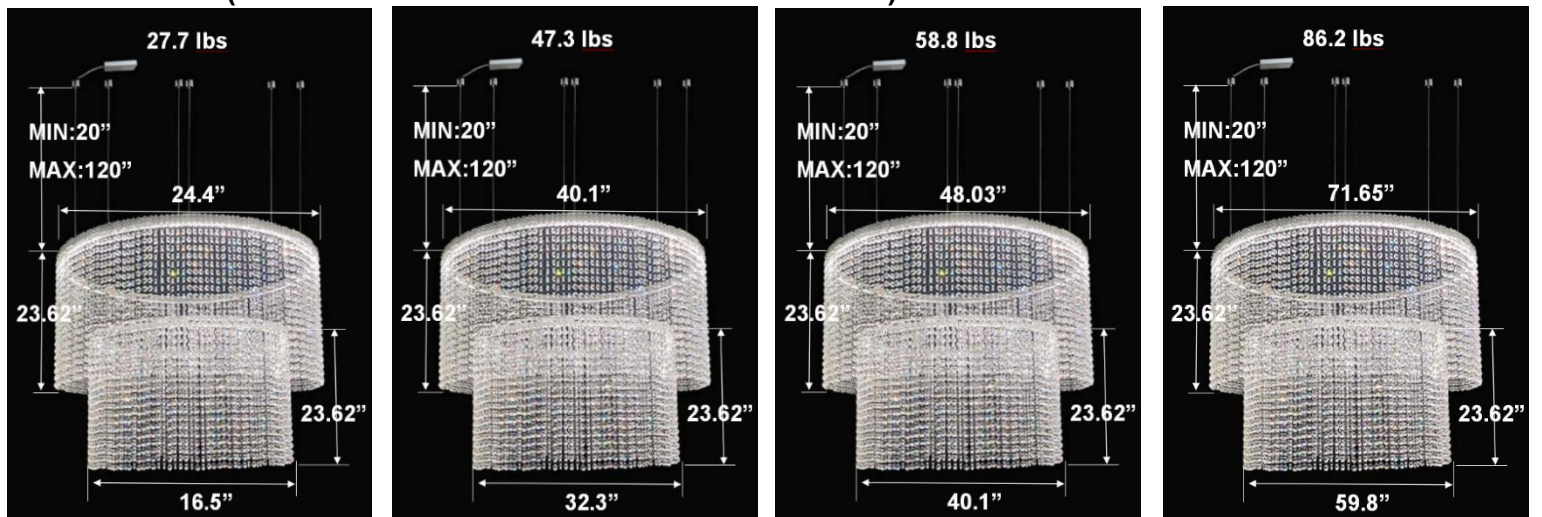


SB-D402D Canopy mount with swiveled rings, direct lighting.

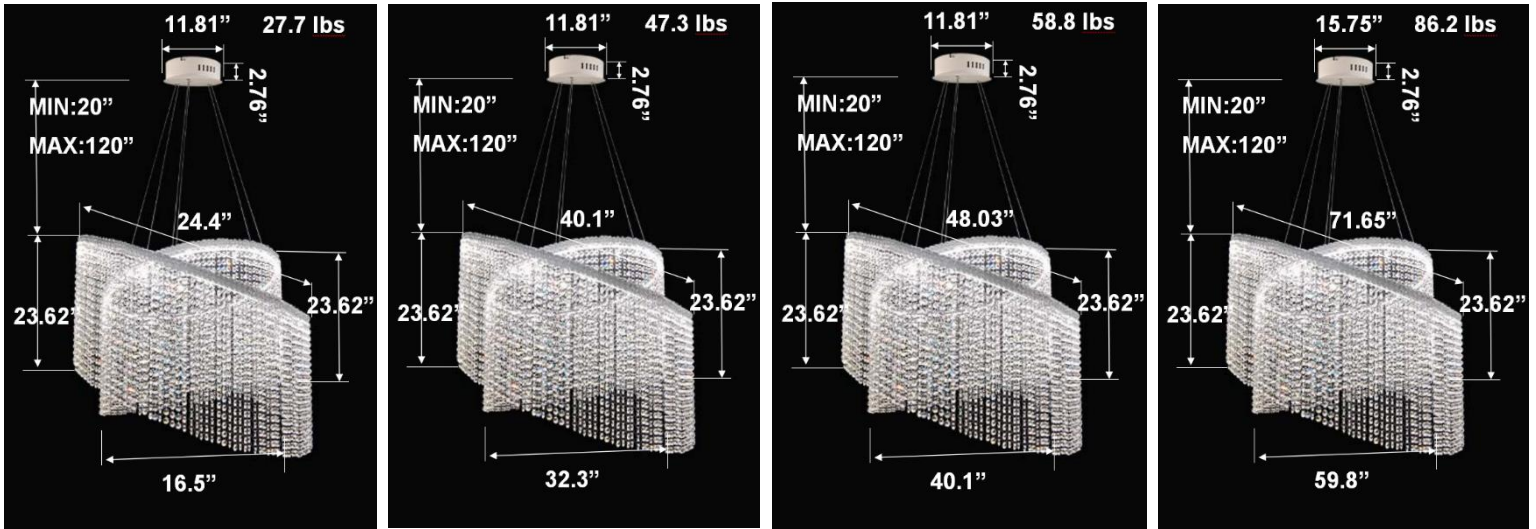

SB-D402E Remote mount with canopy, cables fixed directly to the ceiling, direct lighting.



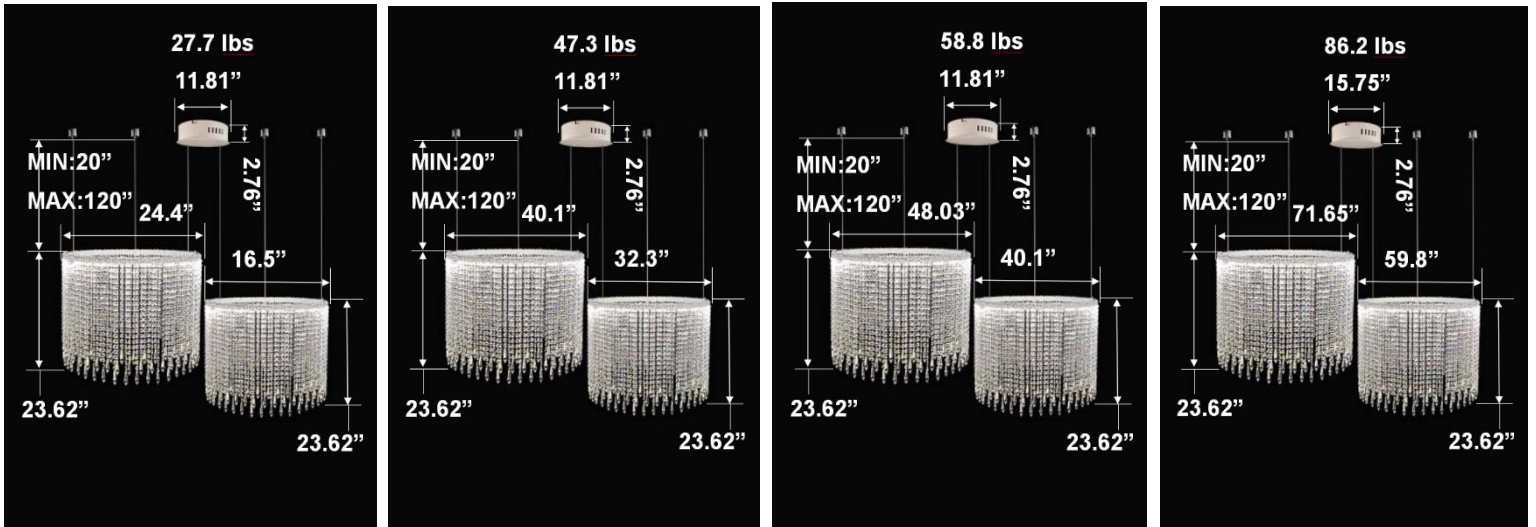


SB-D402F Canopy mount with accent ring and swiveled rings, direct lighting.



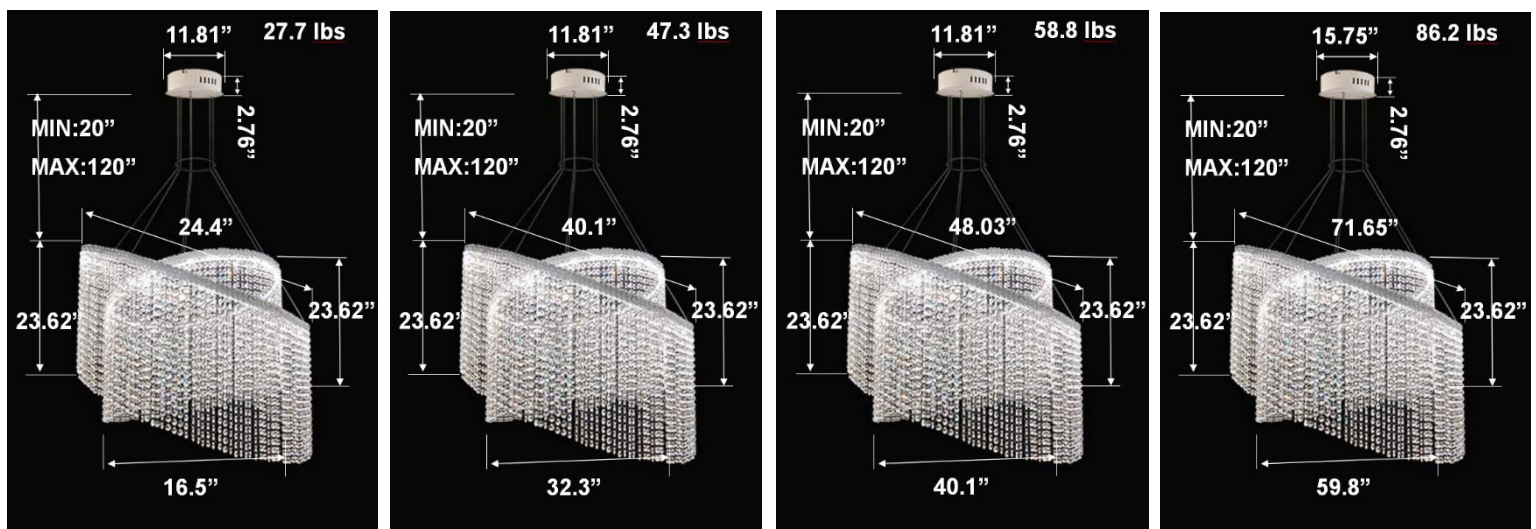


PHOTOMETRIC: Direct Illumination




SB-D101A20WSZ 15.75" 20W @ 4000K

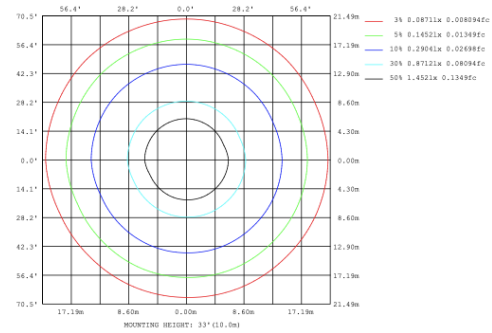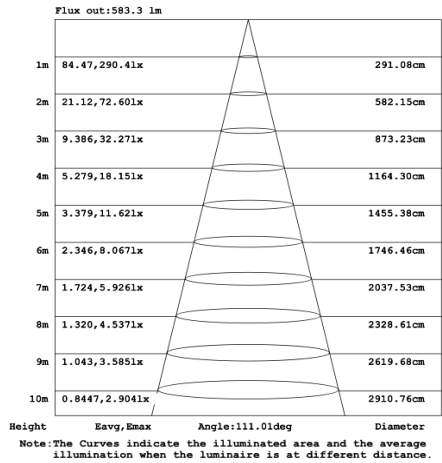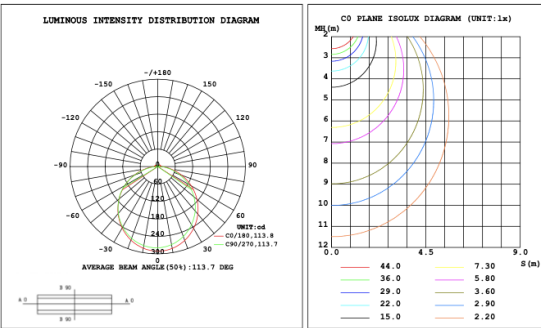


SB-D101A30WSZ 23.62" 30W @ 4000K

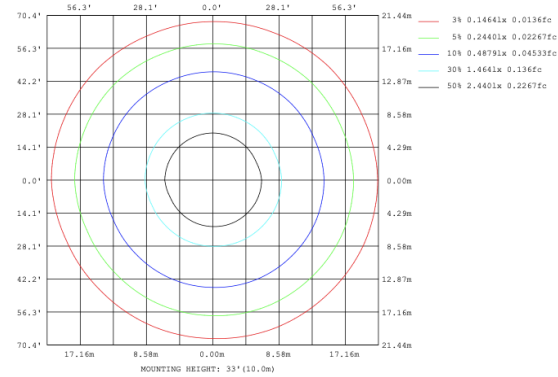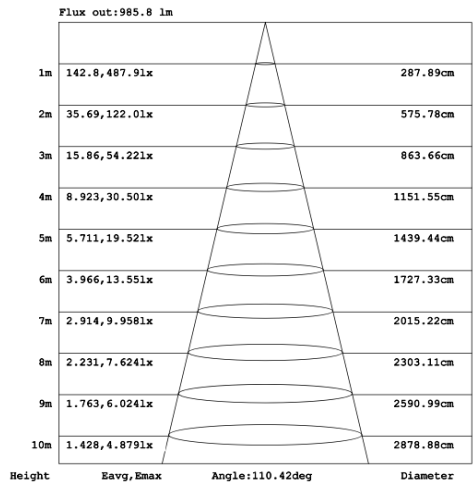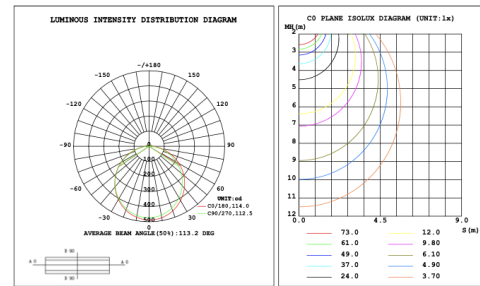

SB-D101A40WSZ 31.50" 40W @ 4000K

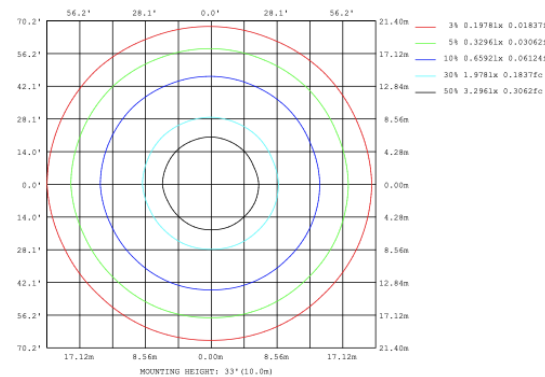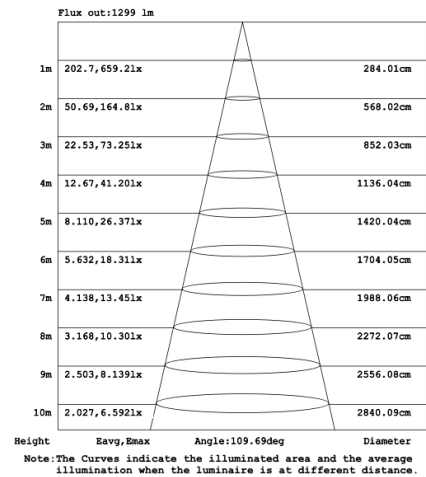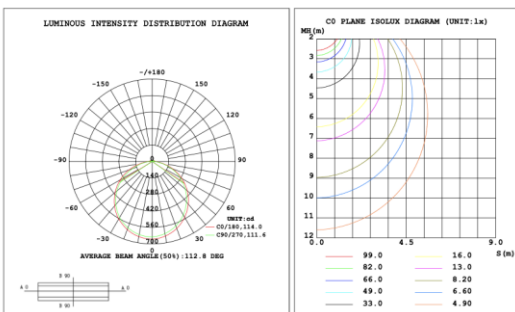


SB-D101A50WSZ 39.37" 50W @ 4000K

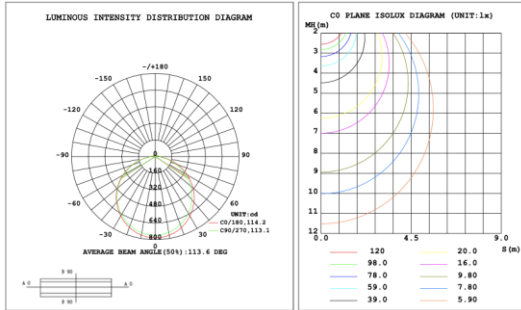


Flux out:1584 lm

Height	Eavg, Emax	Diameter
1m	229.3,782.7lx	290.15cm
2m	57.33,195.71lx	580.31cm
3m	25.48,86.97lx	870.46cm
4m	14.33,48.92lx	1160.61cm
5m	9.173,31.31lx	1450.76cm
6m	6.370,21.74lx	1740.92cm
7m	4.680,15.97lx	2031.07cm
8m	3.583,12.23lx	2321.22cm
9m	2.831,9.66lx	2611.37cm
10m	2.293,7.82lx	2901.53cm

Height Eavg, Emax Angle:110.84deg Diameter
 Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

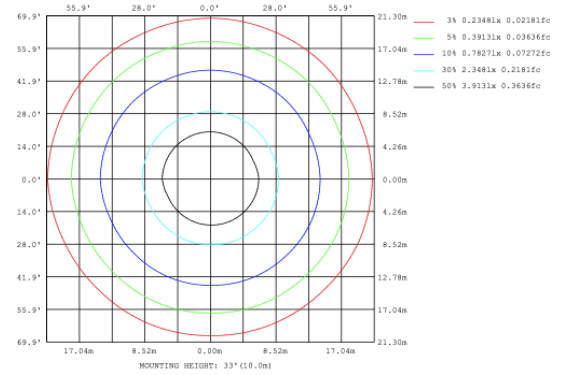


SB-D101A60WSZ 47.24" 60W @ 4000K

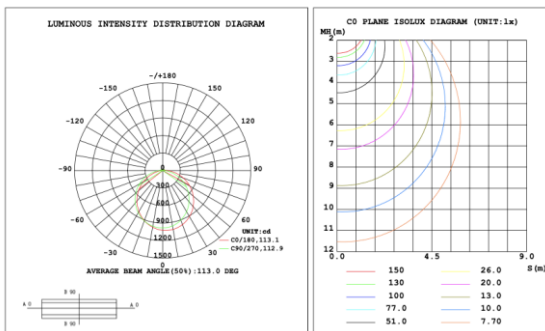


Flux out:2047 lm

Height	Eavg, Emax	Diameter
1m	296.5,1024lx	286.29cm
2m	74.12,256.01lx	572.57cm
3m	32.94,113.81lx	858.86cm
4m	18.53,64.01lx	1145.14cm
5m	11.86,40.96lx	1431.43cm
6m	8.236,28.45lx	1717.71cm
7m	6.051,20.90lx	2004.00cm
8m	4.633,16.00lx	2290.28cm
9m	3.660,12.64lx	2576.57cm
10m	2.965,10.24lx	2862.85cm

Height Eavg, Emax Angle:110.12deg Diameter
 Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

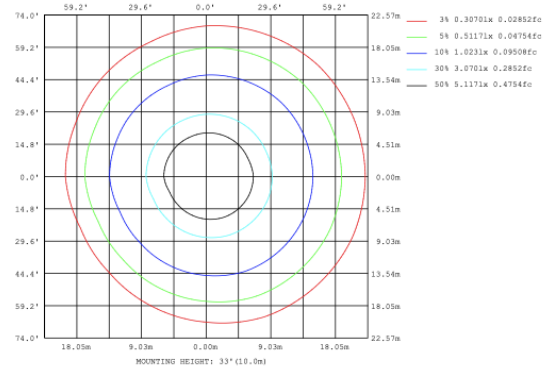


SB-D101A70WSZ 59.06" 70W @ 4000K

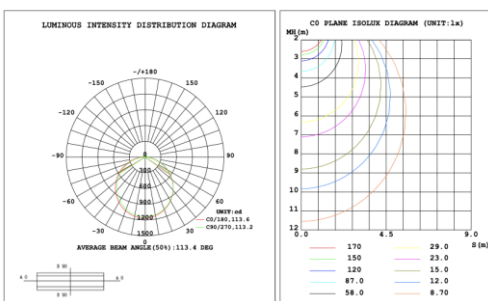


Flux out:2364 lm

Height	Eavg, Emax	Diameter
1m	342.3,1160lx	295.14cm
2m	85.59,290.01lx	590.28cm
3m	38.04,128.91lx	885.43cm
4m	21.40,72.51lx	1180.57cm
5m	13.69,46.40lx	1475.71cm
6m	9.510,32.22lx	1770.85cm
7m	6.987,23.68lx	2066.00cm
8m	5.349,18.13lx	2361.14cm
9m	4.226,14.32lx	2656.28cm
10m	3.423,11.60lx	2951.42cm

Height Eavg, Emax Angle:111.75deg Diameter

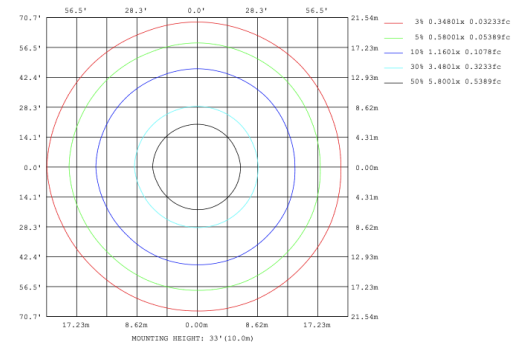

SB-D101A80WSZ 70.87" 80W @ 4000K

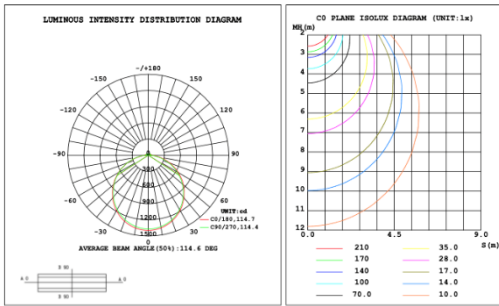

Flux out:2941 lm

Height	Eavg, Emax	Diameter
1m	394.8, 1394lx	302.99cm
2m	98.70, 348.5lx	605.99cm
3m	43.87, 154.9lx	908.98cm
4m	24.67, 87.12lx	1211.98cm
5m	15.79, 55.76lx	1514.97cm
6m	10.97, 38.72lx	1817.96cm
7m	8.057, 28.45lx	2120.96cm
8m	6.169, 21.78lx	2423.95cm
9m	4.874, 17.21lx	2726.95cm
10m	3.948, 13.94lx	3029.94cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

