

[View Keystone 6 tier on website](#)

[View Video](#)

[View application photo](#)

Keystone 6 Tier

PRODUCT DESCRIPTION

Experience the pinnacle of customizable lighting with Keystone's Kelvin Temperature Selectable Circular Pendants. Crafted from extruded aluminum with glare-free flash lens and adjustable aircraft cables, these pendants range from 15.57" to 70.87", allowing for endless design possibilities. With tunable white and RGBW options, over 6500 powder-coated colors, and effortless assembly, these pendants seamlessly blend innovation with sophistication, offering versatile solutions for modern spaces. Shipped assembled for convenience.

FEATURES




- 5-year limited warranty.
- Ships assembled.
- Illumination direct.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- Lens: White frosted acrylic diffuser, Glare-free.
- Fixture delivered lumens per watt ratio up to 60 LPW not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.
- Can be remote driver mounted or driver concealed within the canopy, can be mounted on sloped ceiling.
- Over 50 lbs fixture must be installed using a U.L. listed outlet box or supported independently of the outlet box.

SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC, Dali, DMX, ZigBee available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 2700K/3500K/4000K. Or 3000K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch


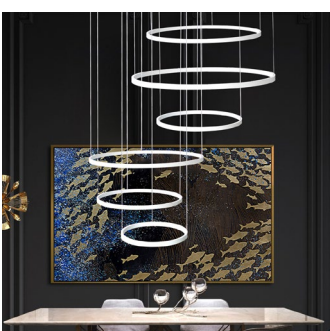

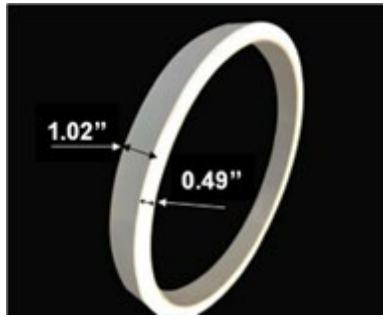


MODEL INFORMATION:

Example: SB-D106A270WSB

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable
*SB-D106A	*270W=59.06"+47.24"+39.37" +31.50"+23.62"+15.57"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming (default)	*B=Black Jack	*Blank=10' foot 120" (default)
	280W=70.87"+59.06"+47.24" +39.37"+31.50"+23.62"		C=Dali		
SB-D106B SB-D106C	270W=39.37"+47.24"+59.06" +47.24"+39.37"+23.62"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tunable White, control by Wall Switch or DMX control system)	S=Platinum Silver	5'=5 foot 60"
	320W=39.37"+47.24"+59.06" +47.24"+39.37"+31.50"			W=Gloss White	15'=15 foot 180"
	350W=47.24"+59.06"+70.87" +59.06"+47.24"+39.37"				20'=20 foot 240"
SB-D106D	180W=23.62"+31.5"+15.75"+ 31.5"+23.62"+15.75"	T=3K-4K Tunable White control by remote/wall control	L=ELV / Triac dimming	O=Oil Rubbed Bronze	25'=25 foot 300"
	210W=31.50"+47.24"+15.75"+ +23.62"+15.75"+39.37"				
	270W=47.24"+59.06"+39.37" + 47.24"+39.37"+31.50"	R3= RGB+3000K	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.		30'=30 foot 360"
	320W=59.06"+70.87"+47.24" +59.06"+47.24"+31.50"	R4=RGB+4000K			
	350W=59.06"+70.87"+47.24" +59.06"+47.24"+39.37"				
<p>Please request specialty pricing for alternative Kelvin temperatures, additional sizes, customizable configurations, specialty color finishes, variations in aircraft cable length, and available controls.</p>			<p>See control options</p>	<p>Find page 3 for custom color options or select from website Color Collections</p>	

STANDARD COLOR FINISHES



Discover beyond our standard hues with over 6,500 [finishes and colors](#) available for your luminaire, including precise color matching, NFL team colors, and custom RAL finishes. Elevate your design with metallic, sparkle, or transparent textures for a touch of individuality. Explore our most popular selections below and contact our factory for personalized quotes.

You can request color swatches by emailing us at customerservice@snowball-inc.com

Please note: Colors may appear differently due to screen display settings.



SOLID TONE FINISH

PMB-4364 Pearl White	PMB-0593 Soft White	PSB-8051 Dirty White	PMB-0513 Silver Metallic II	PMB-6525 BMW Silver	HSS-1336 Silk Satin Black
PPS-0106 Ink Black	USS-2603 Gloss Black	UMB-0336 Metallic Bronze	UMB-0493 US Bronze	EMS-0940 Spanish Gold	PMB-0808 Performance Gold
PSS-4971 Very Red	PSS-2876 Orange Glow	PSS-1791 JuJu Orange	PSS-0118 Spring Yellow	PSB-5945 Bright Green	PMB-10657 Yama Blue
PPB-2846 Purple Glaze	PSS-1670 Rosette Pink	PSS-4008 Jewel Grey	PSS-4500 Crest Grey	PSS-4647 Beach Tan	PMB-5478 Montana Gold

SHIMMER/ GLITTER FINISH

PMB-5567 Champagne Shimmer	UMB-2062 Shimmer Gold	PMS-5677 Shimmer Copper	PMB-6611 Shimmer Black	PPB-8167 Trans Glitter Gold	PMB-6762 Alloy Glitter
--------------------------------------	---------------------------------	-----------------------------------	----------------------------------	---------------------------------------	----------------------------------

PALLEON METALLIC TEXTURED FINISH

PVB-10274 Palleon Paradise	PVB-10272 Palleon Fire	PVB-10271 Palleon Golden Green	PVB-10268 Dark Palleon Paradise	PVB-10267 Dark Palleon Golden Green	PVB-10268 Dark Palleon Fire
PVB-10273 Palleon Panther	PVB-10269 Dark Palleon Panther				

CHROME/SPECIALTY FINISH

UMS-10671 Super Chrome Plus	PPB-6677 Black Chrome III	PMB-4124 Bronze Chrome	UMB-10813 Rose Chrome	UMB-10815 Brass Chrome	UMB-10816 Copper Chrome
PPS-6530 Brassy Gold	PPB-2262 Anodized Gold	PPB-8034 Melted Bronze	PPB-6325 Metallic Clear	PPB-5633 Tinted Clear	PPB-5936 Anodized Red

SPARKLE FINISH

PPB-4694 Super Red Sparkle	PPB-4727 Silver Sparkle	PPB-5835 Rockstar Sparkle	PMB-4130 Pearl Sparkle	PPB-5004 Ultra Blue Sparkle	PPB-5078 Magnum Blue Sparkle
PMB-2750 Dark Grey Sparkle	PMB-6769 Deep Blue Sparkle	PPB-4499 Gold Sparkle	PMB-4417 Baby Blue Sparkle		

WETSTONE WRINKLED TEXTURE FINISH


PWB-2232 Wetstone Black	PWB-9157 Wetstone Gold Bronze	PWB-9156 Wetstone Copper	PWB-2343 Wetstone Rock Bronze	PWB-2590 Wetstone Emerald II
-----------------------------------	---	------------------------------------	---	--

LUMEN OUTPUT (for color selectable not RGBW)

Model Number	Size	Wattage	Kelvin Temp field Selectable ±500K	Delivered Lumen ±10%
SB-D106A	59.06"+47.24"+39.37"+31.50"+23.62"+15.57"	270W	2700K/3500K/4000K or 3000K/3500K/4000K	16200 lm
	70.87"+59.06"+47.24"+39.37"+31.50"+23.62"	280W	2700K/3500K/4000K or 3000K/3500K/4000K	16800 lm
SB-D106B/C	39.37"+47.24"+59.06"+47.24"+39.37"+23.62"	270W	2700K/3500K/4000K or 3000K/3500K/4000K	19200 lm
	39.37"+47.24"+59.06"+47.24"+39.37"+31.50"	320W	2700K/3500K/4000K or 3000K/3500K/4000K	19800 lm
	47.24"+59.06"+70.87"+59.06"+47.24"+39.37"	350W	2700K/3500K/4000K or 3000K/3500K/4000K	23400 lm
SB-D106D	23.62"+31.5"+15.75"+ 31.5"+23.62"+15.75"	180W	2700K/3500K/4000K or 3000K/3500K/4000K	10800 lm
	31.50"+47.24"+15.75"+23.62"+15.75"+39.37"	210W	2700K/3500K/4000K or 3000K/3500K/4000K	12600 lm
	47.24"+59.06"+39.37"+ 47.24"+39.37"+31.50"	270W	2700K/3500K/4000K or 3000K/3500K/4000K	19800 lm
	59.06"+70.87"+47.24"+59.06"+47.24"+31.50"	320W	2700K/3500K/4000K or 3000K/3500K/4000K	22800 lm
	59.06"+70.87"+47.24"+59.06"+47.24"+39.37"	350W	2700K/3500K/4000K or 3000K/3500K/4000K	23400 lm

EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

RGBW/TUNABLE WHITE SMART CONTROL



[SEE SPEC AND VIDEO](#)

Get Smart




Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.

DIMENSIONS & WEIGHTS: Canopy Size for ZigBee & DMX: 15.75" x 2.76"


SB-D106A Canopy mount with direct lighting.

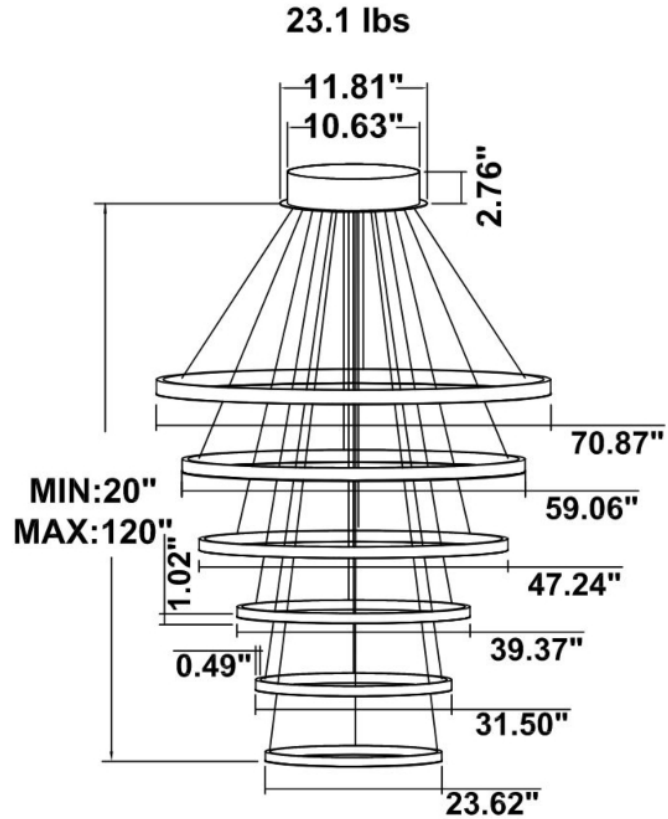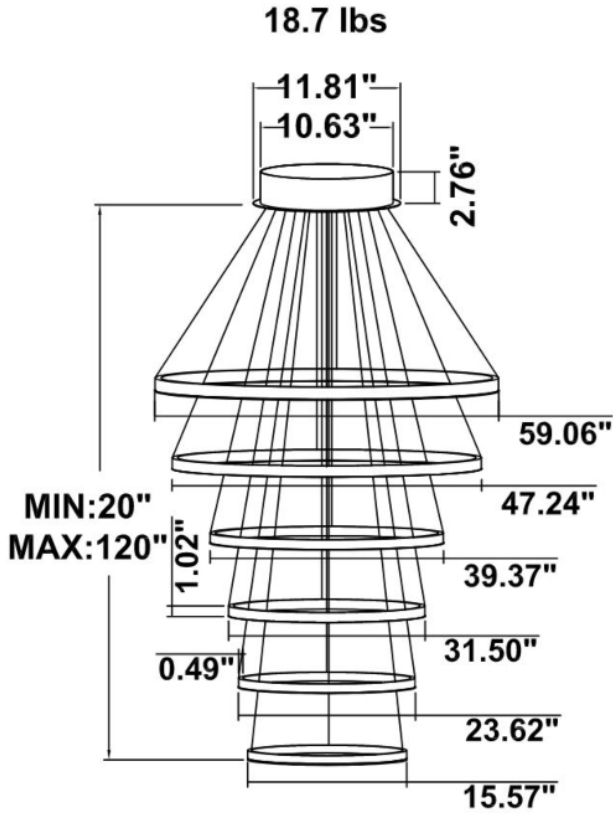


SB-D106B Canopy mount with direct lighting

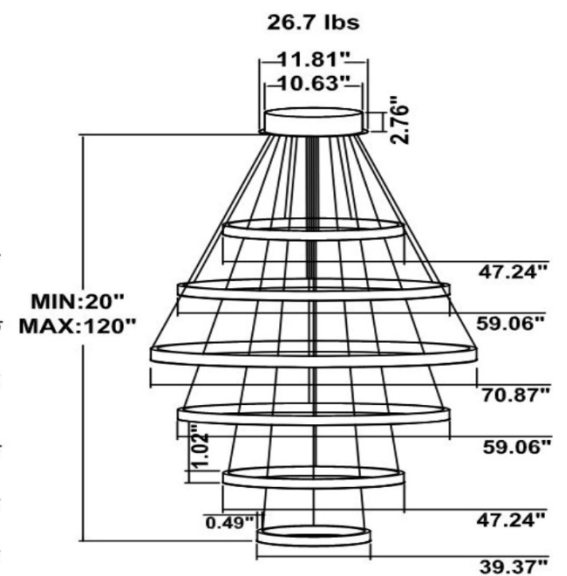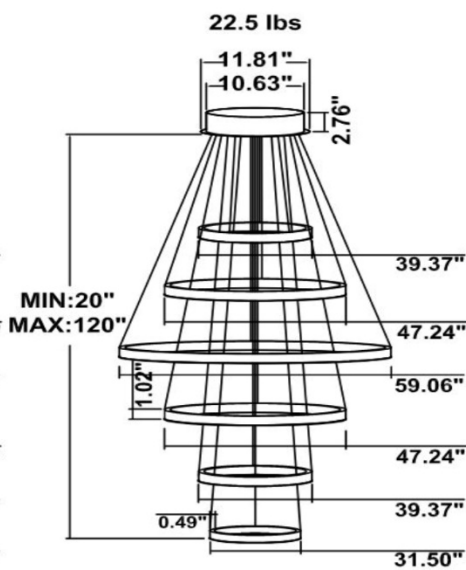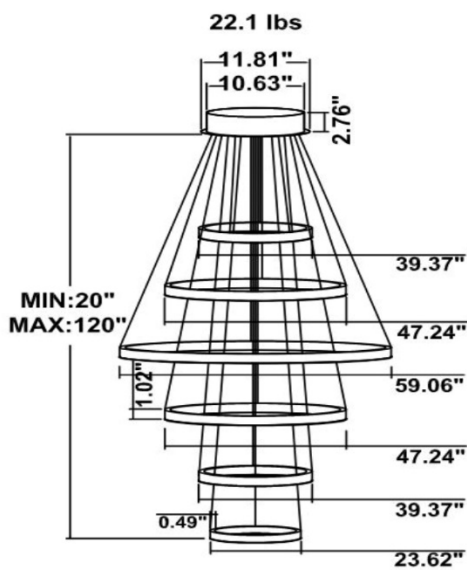

SB-D106C Remote driver with cables fixed directly to the ceiling, direct lighting.
(Driver box size: L10.83" XW3.78" X H1.81")

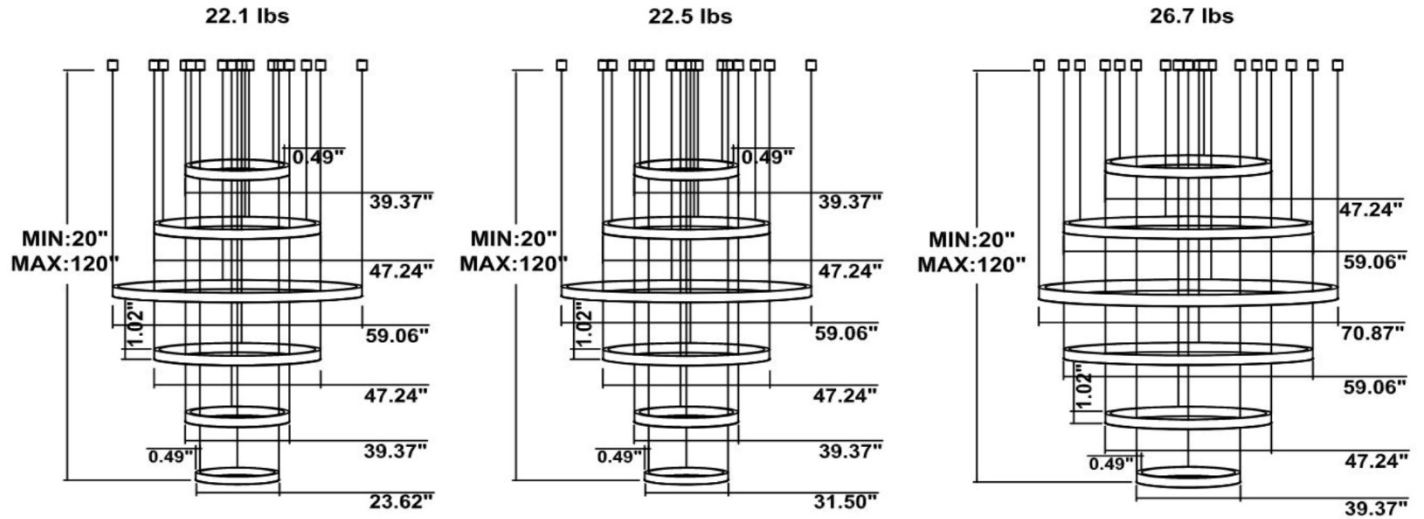


SB-D106D Remote mount with canopy, cables fixed directly to the ceiling, direct lighting.



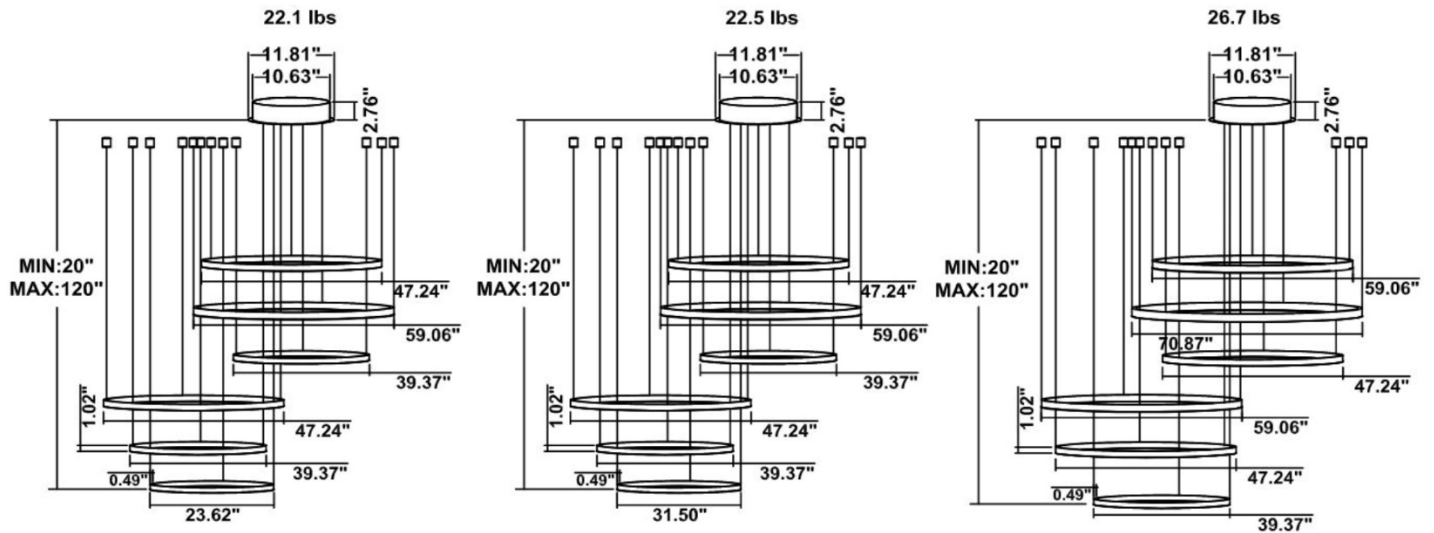


PHOTOMETRIC: Direct Illumination (Testing for single ring only)




SB-D101A20WSZ 15.75" 20W @ 4000K

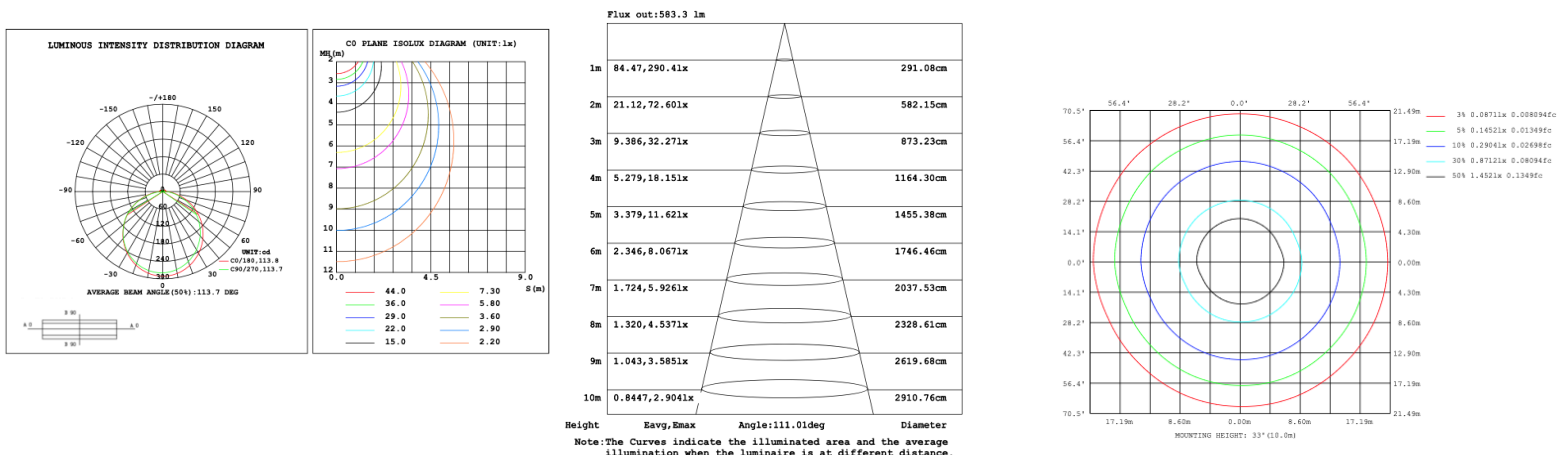




SB-D101A30WSZ 23.62" 30W @ 4000K

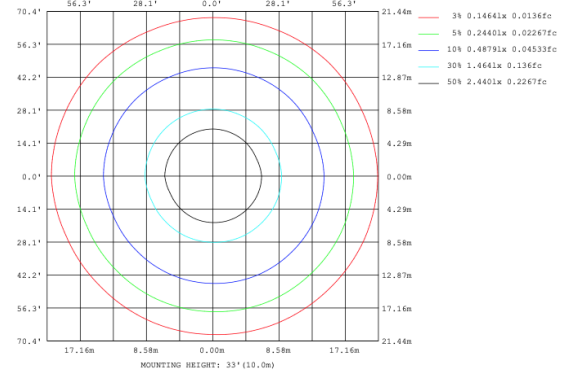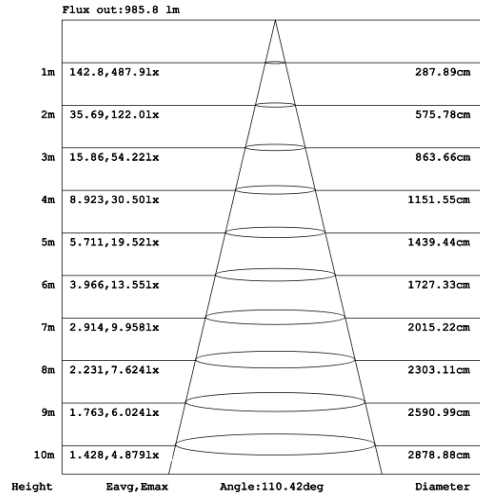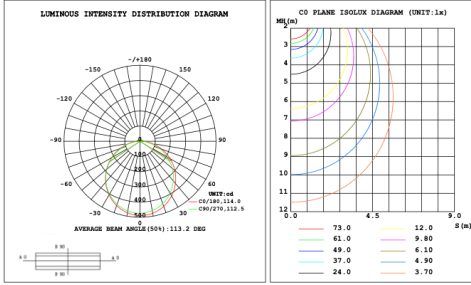


SB-D101A40WSZ 31.50" 40W @ 4000K

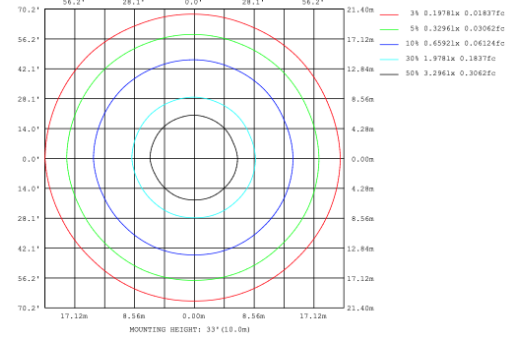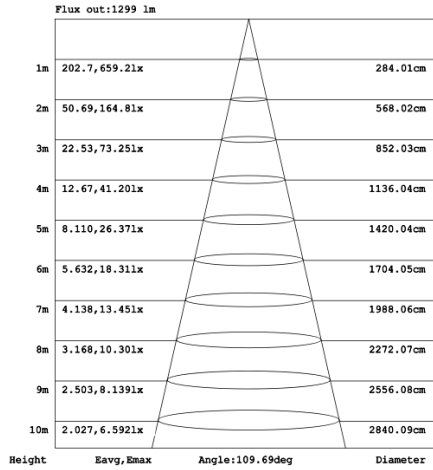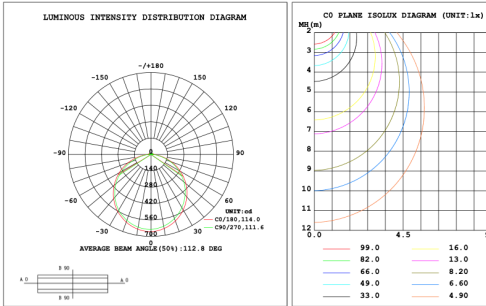

SB-D101A50WSZ 39.37" 50W @ 4000K

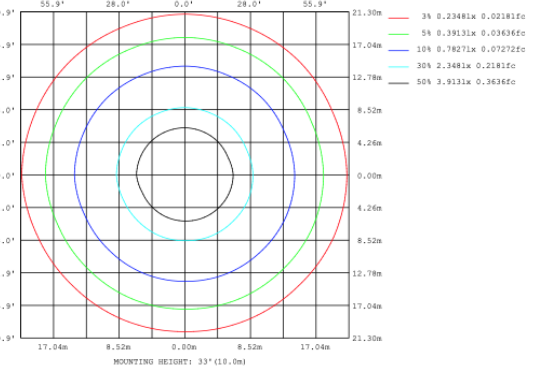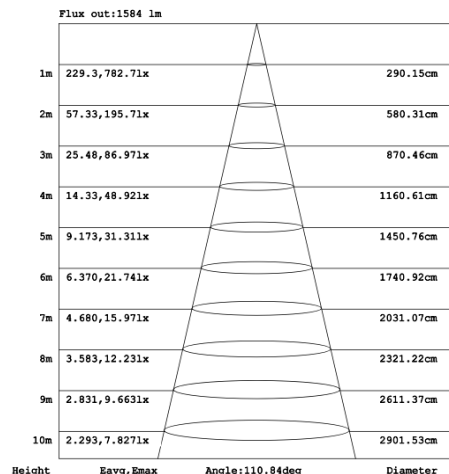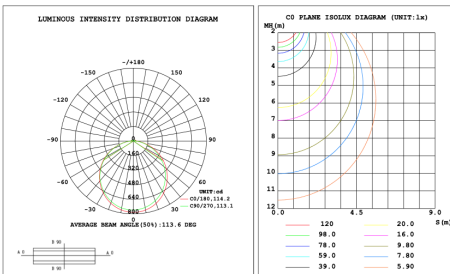


SB-D101A60WSZ 47.24" 60W @ 4000K

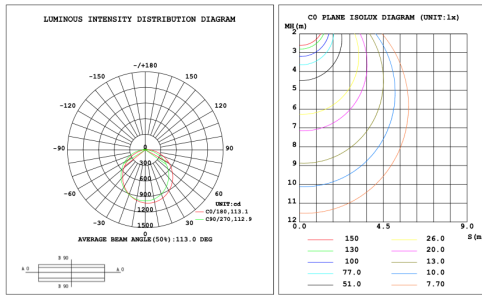


Flux out:2047 lm

Height	Eavg,Emax	Angle:110.12deg	Diameter
1m	296.5,1024lx		286.29cm
2m	74.12,256.01lx		572.57cm
3m	32.94,113.81lx		858.86cm
4m	19.53,64.01lx		1145.14cm
5m	11.86,40.96lx		1431.43cm
6m	8.236,28.45lx		1717.71cm
7m	6.051,20.90lx		2004.00cm
8m	4.633,16.00lx		2290.28cm
9m	3.660,12.64lx		2576.57cm
10m	2.965,10.24lx		2862.85cm

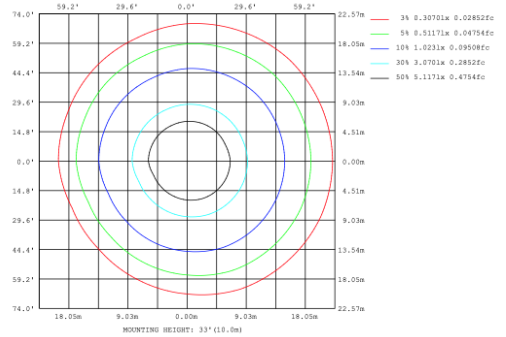


SB-D101A70WSZ 59.06" 70W @ 4000K

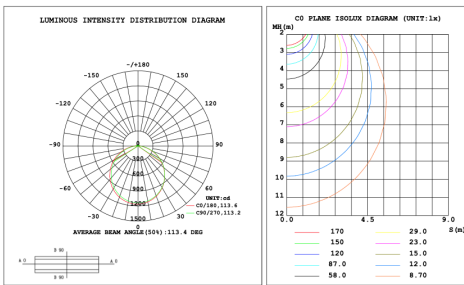


Flux out:2364 lm

Height	Eavg,Emax	Angle:111.75deg	Diameter
1m	342.3,1160lx		295.14cm
2m	85.59,290.01lx		590.28cm
3m	38.04,128.91lx		885.43cm
4m	21.40,72.51lx		1180.57cm
5m	13.69,46.40lx		1475.71cm
6m	9.510,32.22lx		1770.85cm
7m	6.987,23.68lx		2066.00cm
8m	5.349,18.13lx		2361.14cm
9m	4.226,14.32lx		2656.28cm
10m	3.423,11.60lx		2951.42cm

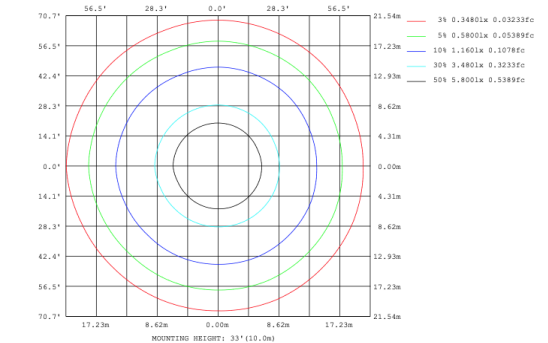

SB-D101A80WSZ 70.87" 80W @ 4000K

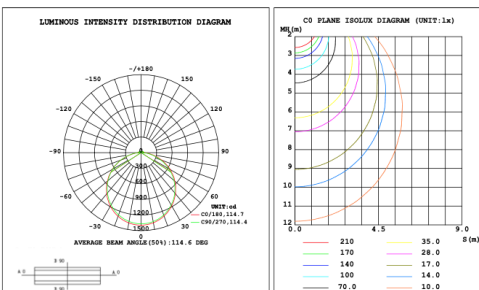

Flux out:2941 lm

Height	Eavg,Emax	Angle:113.14deg	Diameter
1m	394.8,1394lx		302.99cm
2m	98.70,348.51lx		605.99cm
3m	43.87,154.91lx		908.98cm
4m	24.67,87.12lx		1211.98cm
5m	15.79,55.76lx		1514.97cm
6m	10.97,38.72lx		1817.96cm
7m	8.057,28.45lx		2120.96cm
8m	6.169,21.78lx		2423.95cm
9m	4.874,17.21lx		2726.95cm
10m	3.948,13.94lx		3029.94cm

