


[View Aspen 6 tier on website](#)

[View Video](#)

[View application photo](#)

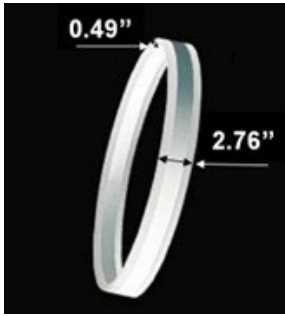

## Aspen 6 Tier

### PRODUCT DESCRIPTION

Introducing the Aspen Circular Pendants, crafted from extruded aluminum with glare-free acrylic rings, offering direct and indirect lighting. Available in sizes from 15.75" to 70.87", mix and match for stunning compositions. With tunable white and RGBW options, and over 6500 powder-coated colors, customize your ambiance effortlessly. Shipped assembled for convenience.

### FEATURES


- 5-year limited warranty.
- Ships assembled.
- Illumination direct/indirect.
- Extruded aluminum housing up to 70.87", 1 continuous ring without joints.
- White frosted acrylic diffuser, Glare-free lens
- Fixture delivered lumens per watt ratio up to 120 LPW, 60 LPW direct, 60 LPW indirect, not including RGBW.
- 10' standard adjustable aircraft cables/power cord adjust by push button grippers, custom length available.
- Can be remote driver mounted or driver concealed within the canopy, can be mounted on sloped ceiling.
- Over 50 lbs fixture must be installed using a U.L. listed outlet box or supported independently of the outlet box.

### SPECIFICATIONS

- 90+ CRI.
- Input: 100-277V, 50/60Hz.
- 1-10V dimming standard, ELV / TRIAC Dali, DMX, ZigBee available.
- UL listed, suitable for dry location. (BAA) Buy American compliant.
- Built in color temperature selectable. Choose from 3000K/3500K/4000K ; Or 2700K/3500K/4000K. Custom color temperatures. lumen outputs, RGBW, Tunable White available.

### PARTS PACKED WITH STANDARD FIXTURE

- Plastic Anchors, Screws, Wire Connectors
- CCT Selector Switch


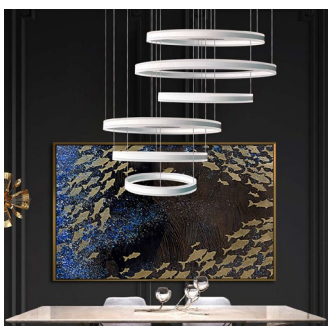


**MODEL INFORMATION:**

**Example: SB-U06A270WSB**

Products Series	Wattage/Size	"E" Kelvin temp options	"W" Controls (don't select this column if selected S or A)	"Z" Profile Finishes	"X" Aircraft Cable	
*SB-U06A	*270W=59.06"+47.24"+39.37"+31.50"+23.62"+15.57"	*S=3000K/3500K/4000K Color Select by internal CCT Color Selector, 4000K factory color default set, CRI 90	*Blank=1-10V dimming (default)	*B=Black Jack	*Blank=10' foot 120" (default)	
	280W=70.87"+59.06"+47.24"+39.37"+31.50"+23.62"		C=Dali		5'=5 foot 60"	
SB-U06B SB-U06C	270W=39.37"+47.24"+59.06"+47.24"+39.37"+23.62"	A=2700K/3500K/4000K Color Select by internal CCT color Selector, 4000K factory color default set. CRI 90	D=DMX (for RGBW and Tuneable White, control by Wall Switch or DMX control system)	S=Platinum Silver	15'=15 foot 180"	
	320W=39.37"+47.24"+59.06"+47.24"+39.37"+31.50"				20'=20 foot 240"	
	350W=47.24"+59.06"+70.87"+59.06"+47.24"+39.37"			W=Gloss White	25'=25 foot 300"	
SB-U06D	180W=23.62"+31.5"+15.75"+31.5"+23.62"+15.75"	T=3K-4K Tunable White control by remote/wall control	Z=ZigBee (for RGBW and CCT tunable / dimmable using remote, App and Google Alexa voice.	O=Oil Rubbed Bronze	30'=30 foot 360"	
	210W=31.50"+39.37"+23.62"+39.37"+31.50"+23.62"					
	270W=39.37"+47.24"+31.50"+47.24"+39.37"+31.50"					
	320W=47.24"+59.06"+39.37"+59.06"+47.24"+39.37"	R3= RGB+3000K	L=ELV / Triac dimming	Find page 3 for custom color options or select from website <a href="#">Color Collections</a>		
	350W=59.06"+70.87"+47.24"+70.87"+59.06"+47.24"	R4=RGB+4000K				
Please request specialty pricing for alternative Kelvin temperatures, additional sizes, customizable configurations, specialty color finishes, variations in aircraft cable length, and available controls.			<a href="#">See control options</a>			

**STANDARD COLOR FINISHES**



Discover beyond our standard hues with over 6,500 [finishes and colors](#) available for your luminaire, including precise color matching, NFL team colors, and custom RAL finishes. Elevate your design with metallic, sparkle, or transparent textures for a touch of individuality. Explore our most popular selections below and contact our factory for personalized quotes.

You can request color swatches by emailing us at [customerservice@snowball-inc.com](mailto:customerservice@snowball-inc.com)

Please note: Colors may appear differently due to screen display settings.



### SOLID TONE FINISH

<b>PMB-4364</b> Pearl White	<b>PMB-0593</b> Soft White	<b>PSB-8051</b> Dirty White	<b>PMB-0513</b> Silver Metallic II	<b>PMB-6525</b> BMW Silver	<b>HSS-1336</b> Silk Satin Black
<b>PSS-0106</b> Ink Black	<b>USS-2603</b> Gloss Black	<b>UMB-0336</b> Metallic Bronze	<b>UMB-0493</b> US Bronze	<b>EMS-0940</b> Spanish Gold	<b>PMB-0808</b> Performance Gold
<b>PSS-4971</b> Very Red	<b>PSS-2876</b> Orange Glow	<b>PSS-1791</b> JuJu Orange	<b>PSS-0118</b> Spring Yellow	<b>PSB-5945</b> Bright Green	<b>PMB-10657</b> Yama Blue
<b>PPB-2846</b> Purple Glaze	<b>PSS-1670</b> Rosette Pink	<b>PSS-4008</b> Jewel Grey	<b>PSS-4500</b> Crest Grey	<b>PSS-4647</b> Beach Tan	<b>PMB-5478</b> Montana Gold

### SHIMMER/ GLITTER FINISH

<b>PMB-5567</b> Champagne Shimmer	<b>UMB-2062</b> Shimmer Gold	<b>PMS-5677</b> Shimmer Copper	<b>PMB-6611</b> Shimmer Black	<b>PPB-8167</b> Trans Glitter Gold	<b>PMB-6762</b> Alloy Glitter
--------------------------------------	---------------------------------	-----------------------------------	----------------------------------	---------------------------------------	----------------------------------

### PALLEON METALLIC TEXTURED FINISH

<b>PVB-10274</b> Palleon Paradise	<b>PVB-10272</b> Palleon Fire	<b>PVB-10271</b> Palleon Golden Green	<b>PVB-10268</b> Dark Palleon Paradise	<b>PVB-10267</b> Dark Palleon Golden Green	<b>PVB-10268</b> Dark Palleon Fire
<b>PVB-10273</b> Palleon Panther	<b>PVB-10269</b> Dark Palleon Panther				

### CHROME/SPECIALTY FINISH

<b>UMS-10671</b> Super Chrome Plus	<b>PPB-6677</b> Black Chrome III	<b>PMB-4124</b> Bronze Chrome	<b>UMB-10813</b> Rose Chrome	<b>UMB-10815</b> Brass Chrome	<b>UMB-10816</b> Copper Chrome
<b>PPS-6530</b> Brassy Gold	<b>PPB-2262</b> Anodized Gold	<b>PPB-8034</b> Melted Bronze	<b>PPB-6325</b> Metallic Clear	<b>PPB-5633</b> Tinted Clear	<b>PPB-5936</b> Anodized Red

### SPARKLE FINISH

<b>PPB-4694</b> Super Red Sparkle	<b>PPB-4727</b> Silver Sparkle	<b>PPB-5835</b> Rockstar Sparkle	<b>PMB-4130</b> Pearl Sparkle	<b>PPB-5004</b> Ultra Blue Sparkle	<b>PPB-5078</b> Magnum Blue Sparkle
<b>PMB-2750</b> Dark Grey Sparkle	<b>PMB-6769</b> Deep Blue Sparkle	<b>PPB-4499</b> Gold Sparkle	<b>PMB-4417</b> Baby Blue Sparkle		

### WETSTONE WRINKLED TEXTURE FINISH


<b>PWB-2232</b> Wetstone Black	<b>PWB-9157</b> Wetstone Gold Bronze	<b>PWB-9156</b> Wetstone Copper	<b>PWB-2343</b> Wetstone Rock Bronze	<b>PWB-2590</b> Wetstone Emerald II
-----------------------------------	---	------------------------------------	---	--

## LUMEN OUTPUT (for color selectable not RGBW)

Model Number	Size	Wattage	Kelvin Temp field Selectable ±500K	Delivered Lumen ±10%
SB-U06A	59.06"+47.24"+39.37"+31.50"+23.62"+15.57"	270W	2700K/3500K/4000K or 3000K/3500K/4000K	32400 lm
	70.87"+59.06"+47.24"+39.37"+31.50"+23.62"	280W	2700K/3500K/4000K or 3000K/3500K/4000K	33600 lm
SB-U06B/C	39.37"+47.24"+59.06"+47.24"+39.37"+23.62"	270W	2700K/3500K/4000K or 3000K/3500K/4000K	38400 lm
	39.37"+47.24"+59.06"+47.24"+39.37"+31.50"	320W	2700K/3500K/4000K or 3000K/3500K/4000K	39600 lm
	47.24"+59.06"+70.87"+59.06"+47.24"+39.37"	350W	2700K/3500K/4000K or 3000K/3500K/4000K	46800 lm
SB-U06D	23.62"+31.5"+15.75"+ 31.5"+23.62"+15.75"	180W	2700K/3500K/4000K or 3000K/3500K/4000K	21600 lm
	31.50"+39.37"+23.62"+39.37"+31.50"+23.62"	210W	2700K/3500K/4000K or 3000K/3500K/4000K	28800 lm
	39.37"+47.24"+31.50+47.24"+39.37"+31.50"	270W	2700K/3500K/4000K or 3000K/3500K/4000K	36000 lm
	47.24"+59.06"+39.37"+ 59.06"+ 47.24"+39.37"	320W	2700K/3500K/4000K or 3000K/3500K/4000K	43200 lm
	59.06"+70.87"+47.24"+70.87"+59.06"+47.24"	350W	2700K/3500K/4000K or 3000K/3500K/4000K	50400 lm

## EMERGENCY BATTERY OPTIONS

[SEE SPEC](#)

PICTURE	MODEL NUMBER	DESCRIPTION
	SB-EBP/5W/B	Factory installed Remote Emergency Battery Pack 5W 90 minutes
	SB-EBP/10.7W/B	Factory installed Remote Emergency Battery Pack 10.7W 90 minutes
	SB-EBP/17W/B	Factory installed Remote Emergency Battery Pack 17W 90 minutes

## RGBW/TUNEABLE WHITE SMART CONTROL VIDEO

[SEE SPEC AND VIDEO](#)


### Get Smart

Using Amazon Echo, Echo Dot, or any Alexa-enabled device allows you to turn your luminaire on and off, dim the light and change light color to Red, Green, Blue or White independently by using voice command or Smart phone app, DMX, Handheld remote or wall control.


**DIMENSIONS & WEIGHTS:** Canopy Size for ZigBee & DMX: 15.75" x 2.76"

**SB-U06A Canopy mount with direct and indirect lighting.**

41.7 lbs

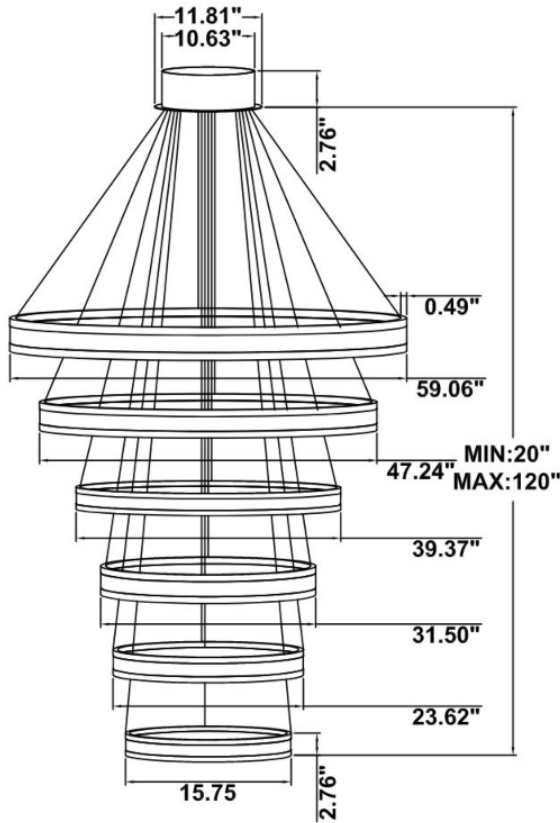


52.4 lbs

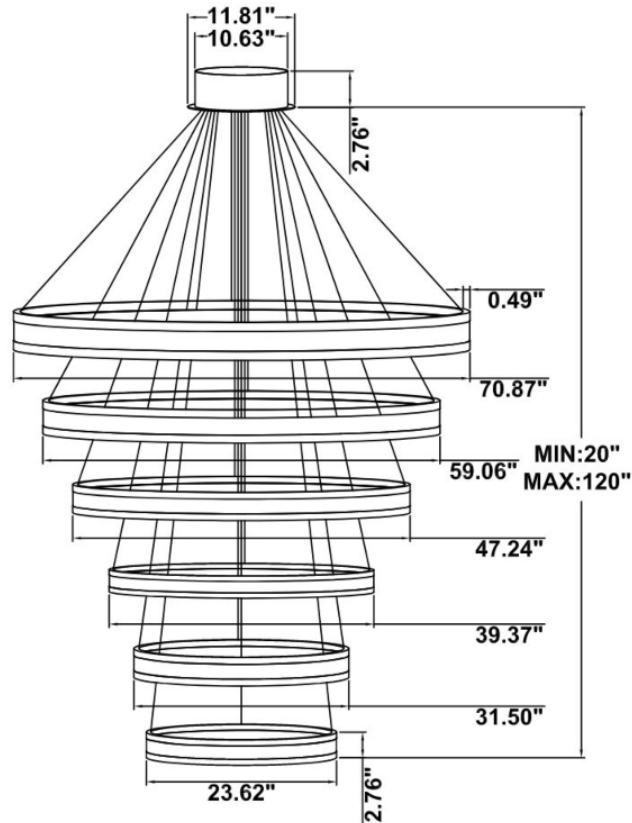


**SB-U06B Canopy mount with direct and indirect lighting.**


48.6 lbs

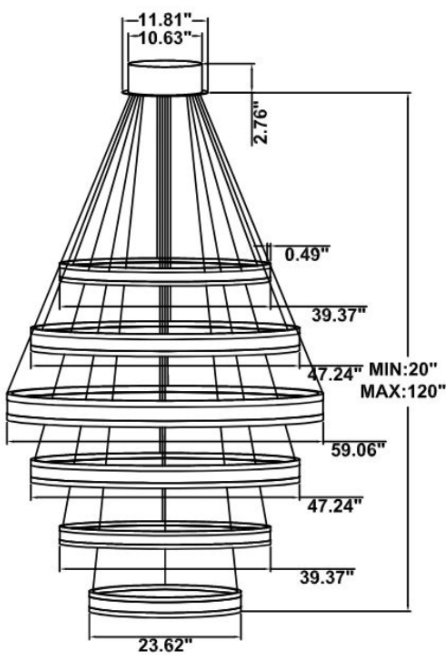


49.8 lbs

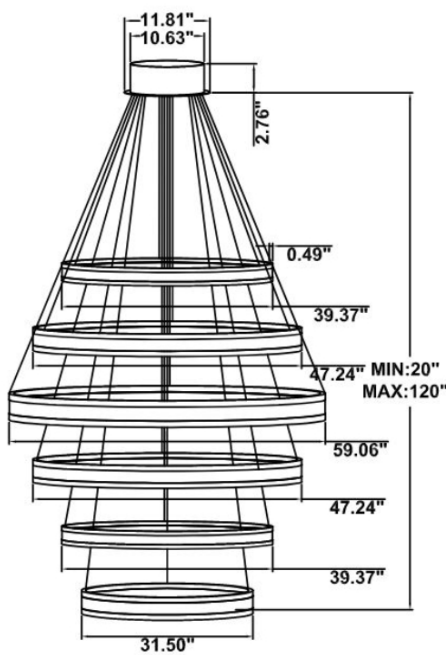


61.7 lbs

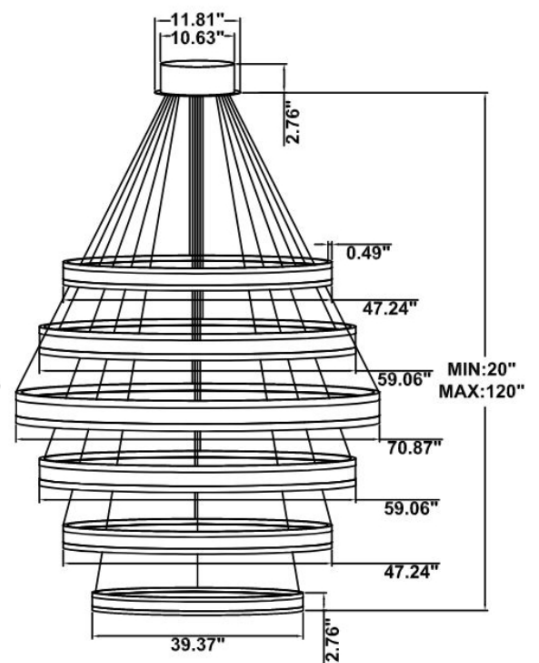


**SB-U06C Canopy mount with direct and indirect lighting.**

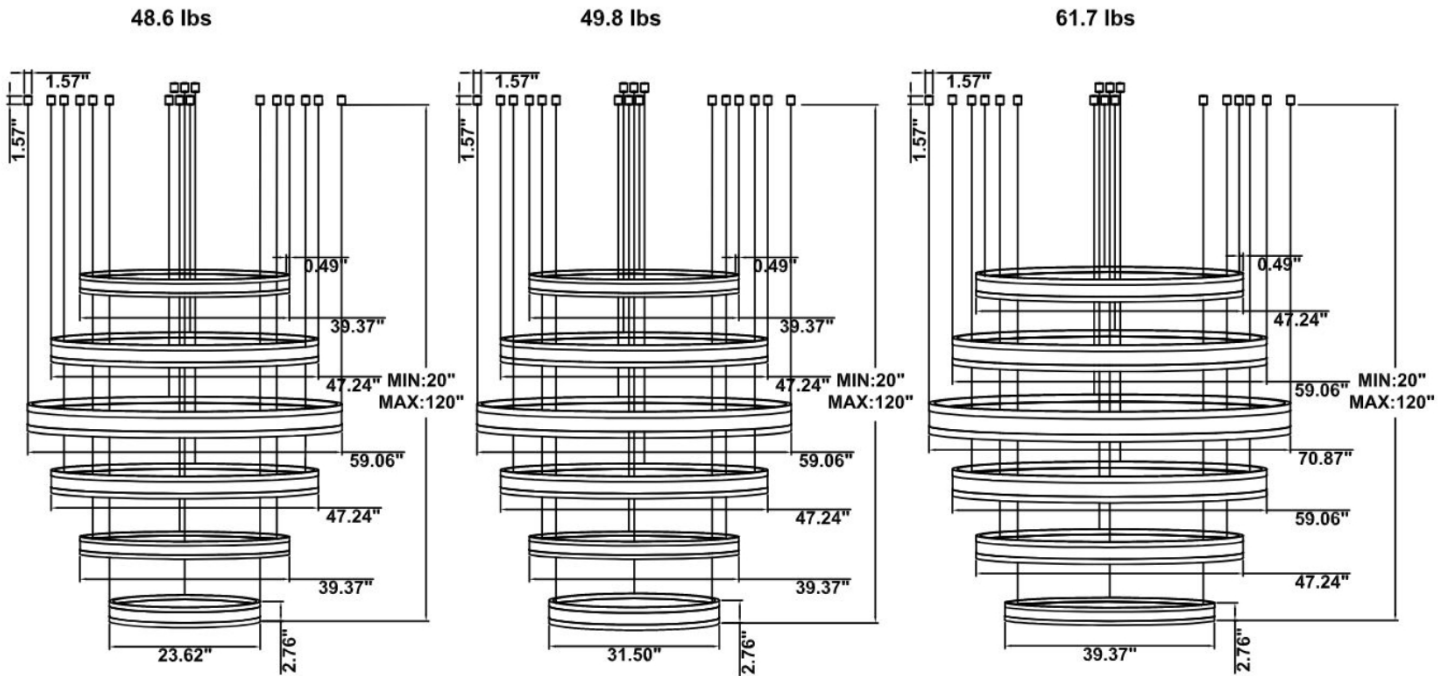

**SB-U06D Canopy mount with direct and indirect lighting.**

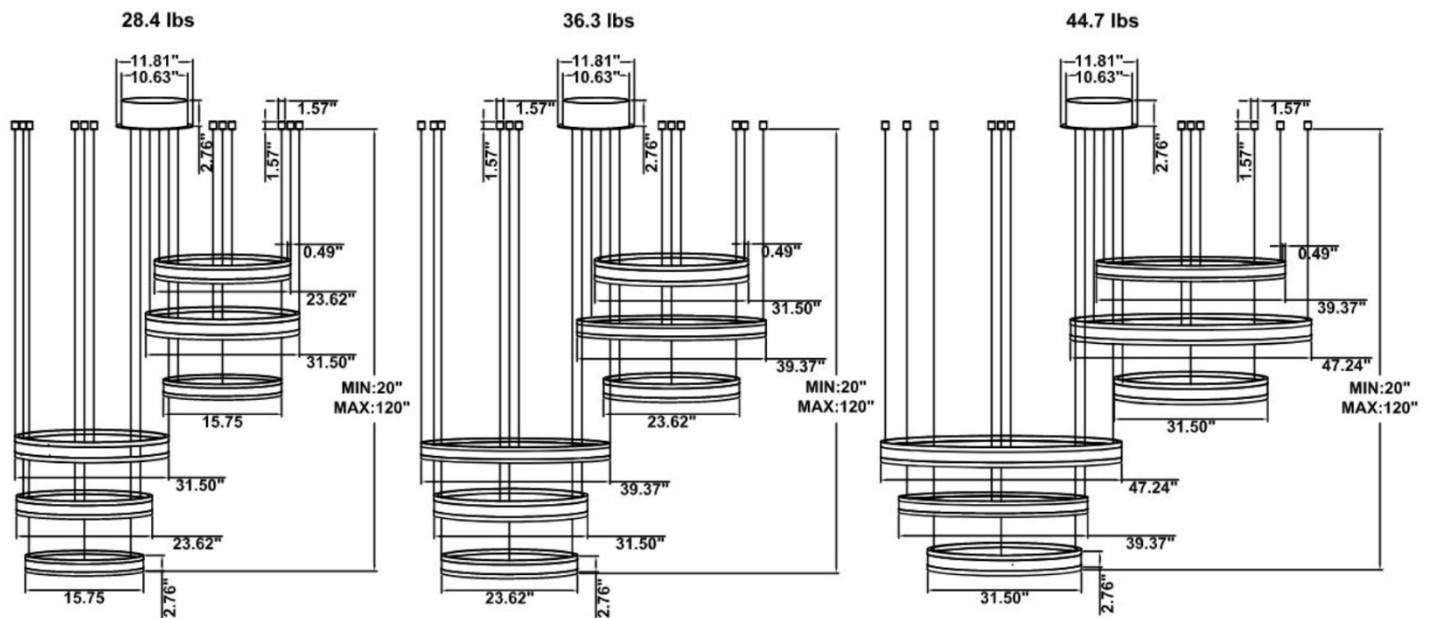


**SB-U06D Canopy mount with direct and indirect lighting.**

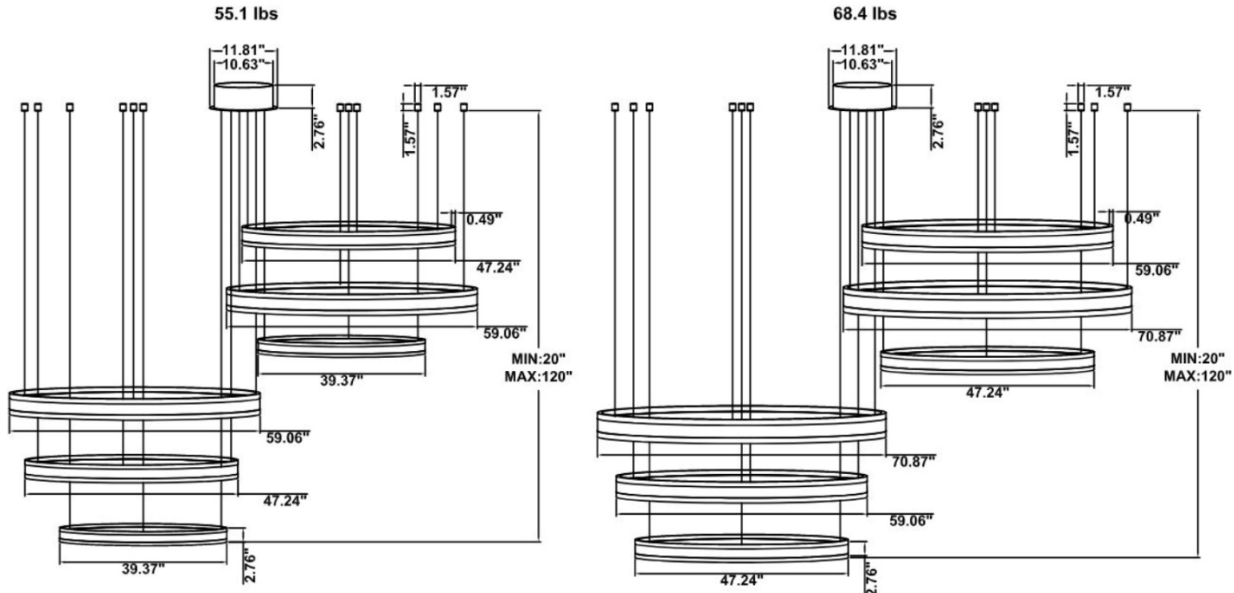


**PHOTOMETRIC: Direct Illumination (Testing for single ring only)**


**15.75\"/>**

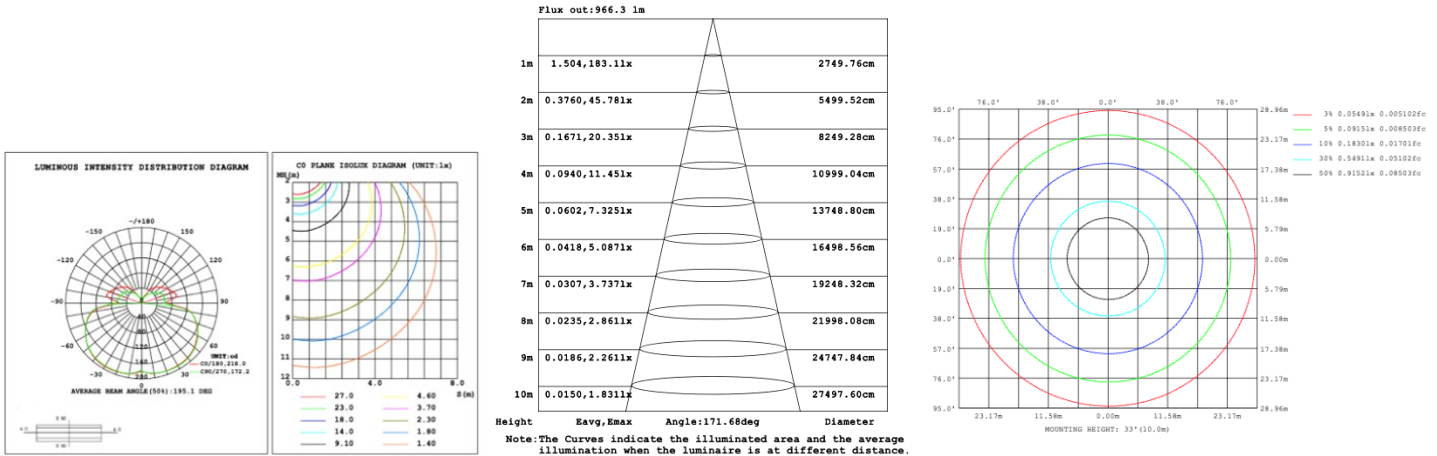

**23.62\"/>**

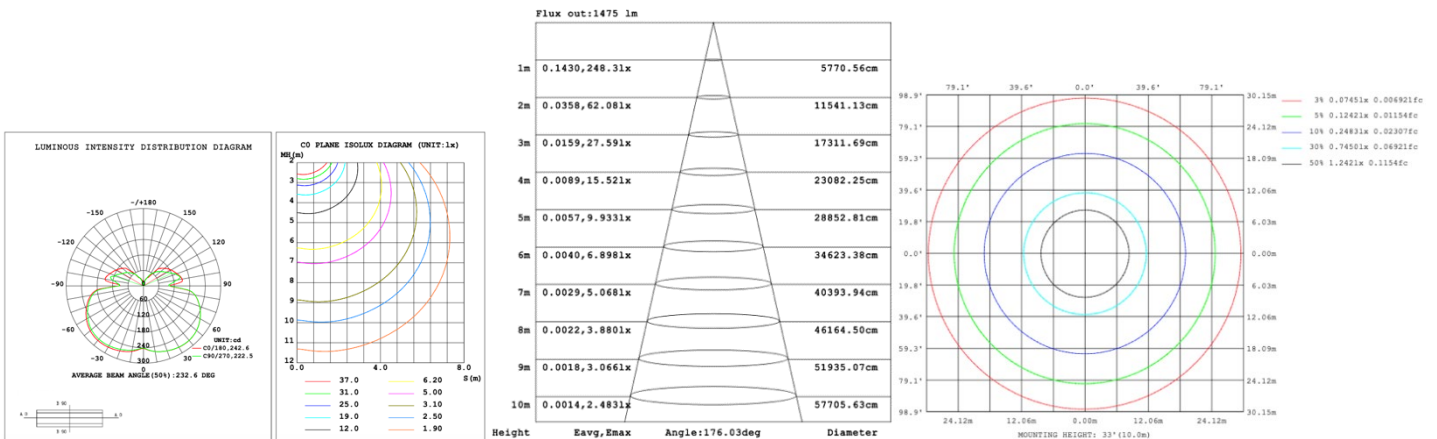


**31.50" 40W @ 4000K**

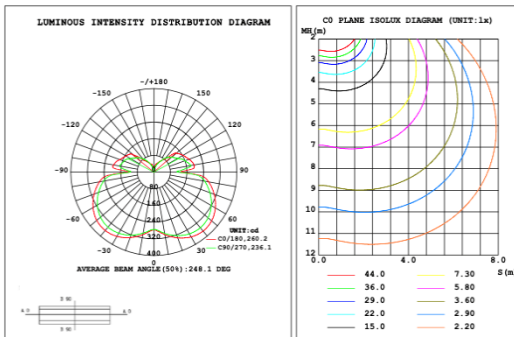


Flux out:1906 lm

Height	Eavg, Emax	Angle:178.35deg	Diameter
1m	0.0000,291.01lx		13888.98cm
2m	0.0000,72.751lx		27777.95cm
3m	0.0000,32.331lx		41666.93cm
4m	0.0000,18.191lx		55555.91cm
5m	0.0000,11.641lx		69444.89cm
6m	0.0000,8.0831lx		83333.86cm
7m	0.0000,5.9381lx		97222.84cm
8m	0.0000,4.5471lx		111111.82cm
9m	0.0000,3.5921lx		125000.80cm
10m	0.0000,2.9101lx		138889.77cm

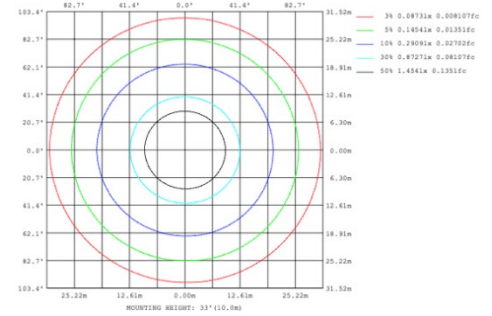


**39.37" 50W @ 4000K**

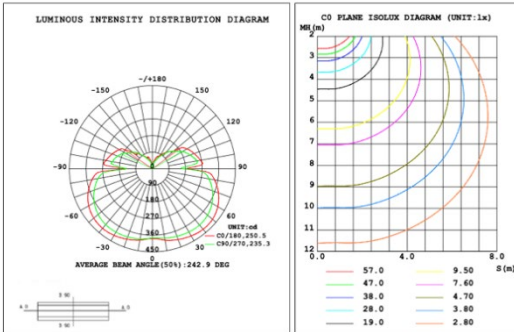


Flux out:2283 lm

Height	Eavg, Emax	Angle:178.55deg	Diameter
1m	0.0000,378.61lx		15804.92cm
2m	0.0000,94.651lx		31609.84cm
3m	0.0000,42.071lx		47414.77cm
4m	0.0000,23.661lx		63219.69cm
5m	0.0000,15.141lx		79024.61cm
6m	0.0000,10.521lx		94829.53cm
7m	0.0000,7.7271lx		110634.45cm
8m	0.0000,5.9161lx		126439.38cm
9m	0.0000,4.6741lx		142244.30cm
10m	0.0000,3.7861lx		158049.22cm

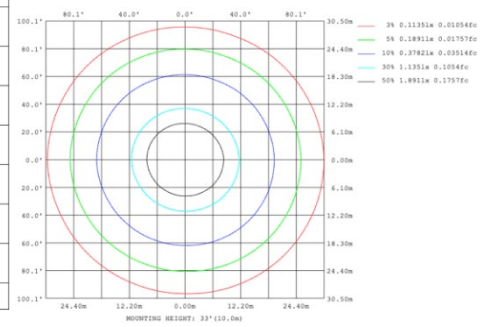


**47.24" 60W @ 4000K**

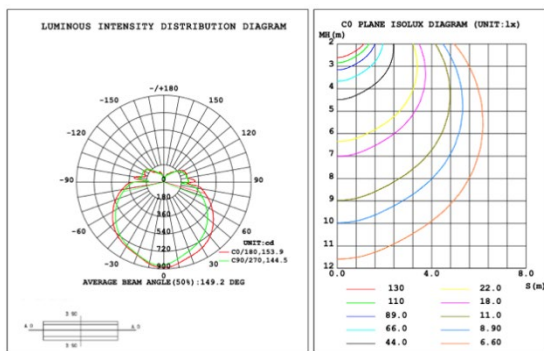


Flux out:2809 lm

Height	Eavg, Emax	Angle:142.17deg	Diameter
1m	94.38,885.31lx		583.66cm
2m	23.60,221.31lx		1167.32cm
3m	10.49,98.361lx		1750.97cm
4m	5.899,55.331lx		2334.63cm
5m	3.775,35.411lx		2918.29cm
6m	2.622,24.591lx		3501.95cm
7m	1.926,18.071lx		4085.61cm
8m	1.475,13.831lx		4669.27cm
9m	1.165,10.931lx		5252.92cm
10m	0.9438,8.8531lx		5836.58cm

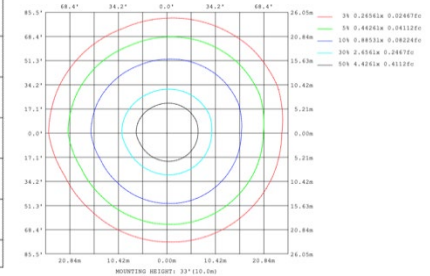



**59.06" 70W @ 4000K**

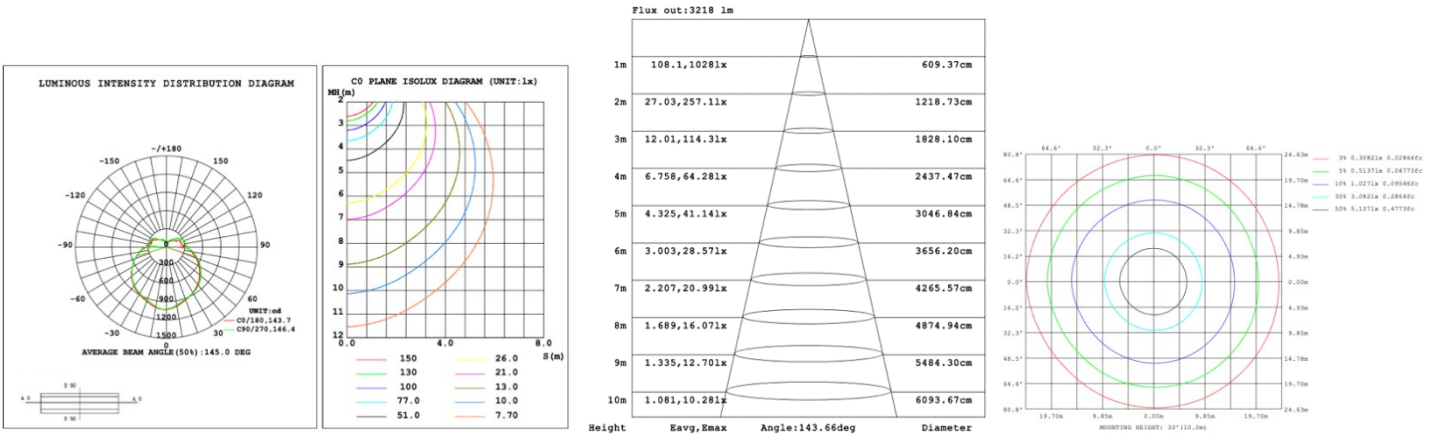

**70.87" 80W @ 4000K**

